

MVR-G215


49212406688

Generator protection

Data sheet



Improve
Tomorrow

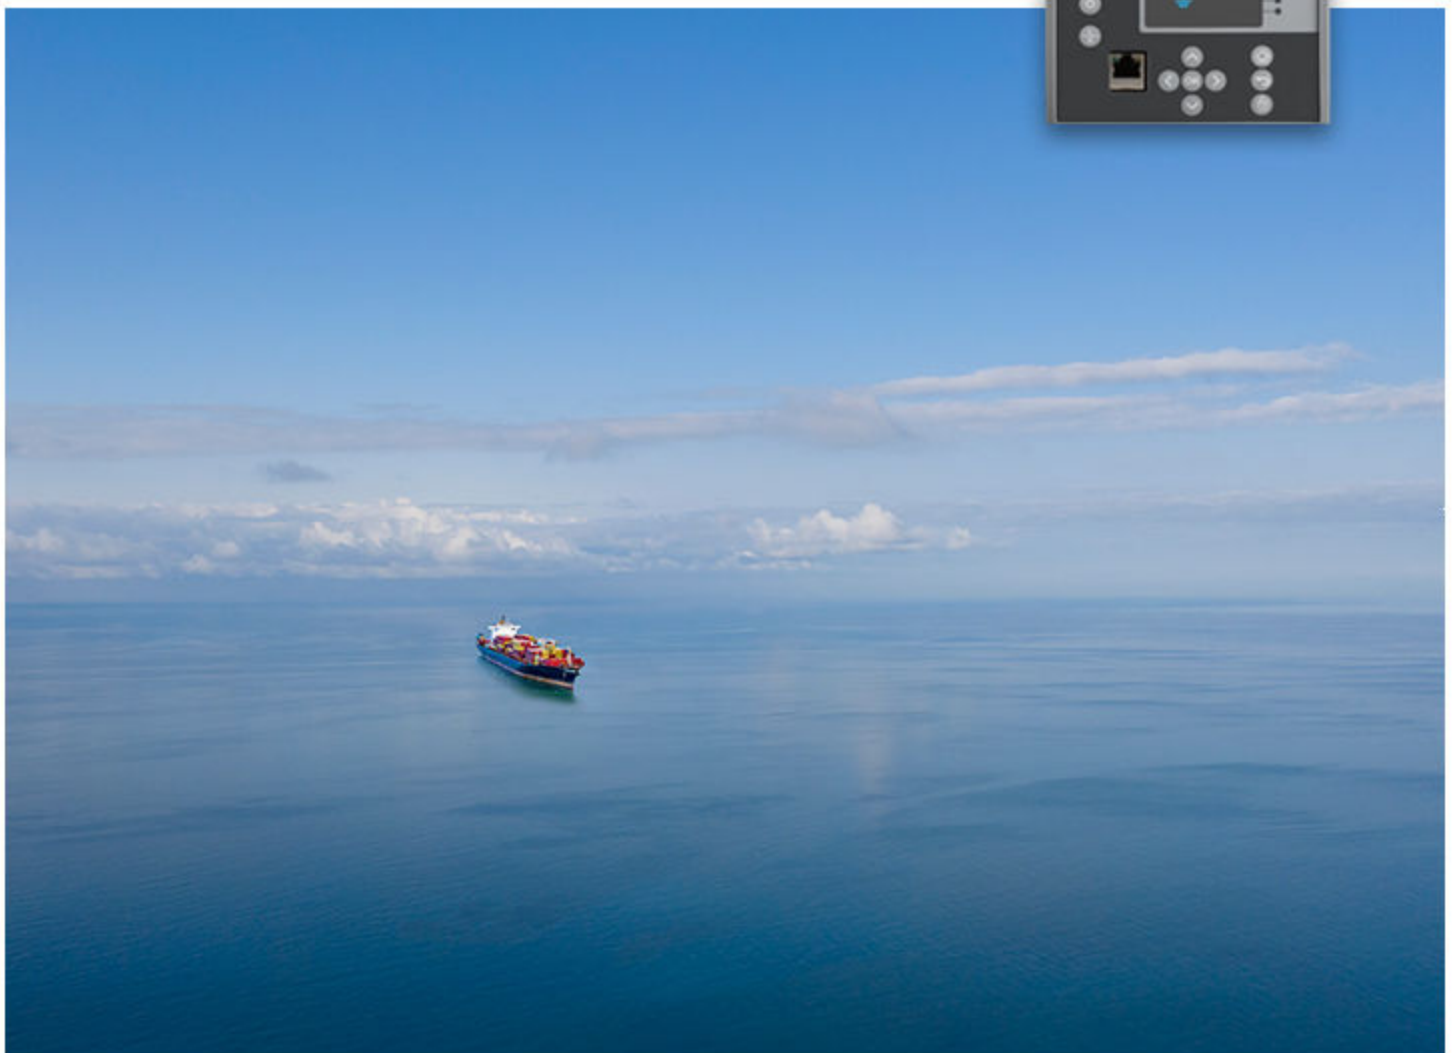

1. Product description

1.1 About.....	4
1.2 Applications.....	4
1.3 Features.....	5

2. Protections

2.1 Current protections.....	6
2.1.1 Non-directional overcurrent protection ($I_{>}$; 50/51).....	6
2.1.2 Non-directional earth fault protection ($I_{O>}$; 50N/51N).....	7
2.1.3 Directional overcurrent protection ($I_{dir>}$; 67).....	8
2.1.4 Directional earth fault protection ($I_{dir>}$; 67N/32N).....	9
2.1.5 Negative sequence overcurrent/ phase current reversal/ current unbalance protection ($I_{2>}$; 46/46R/46L).....	10
2.1.6 Circuit breaker failure protection (CBFP; 50BF/52BF).....	11
2.1.7 Harmonic overcurrent protection ($I_{h>}$; 50H/51H/68H).....	11
2.1.8 Voltage-restrained overcurrent protection ($I_{v>}$; 51V).....	12
2.1.9 Arc fault protection ($I_{Arc>}/I_{0Arc>}$; 50Arc/50NArc) (optional).....	13
2.2 Voltage protections.....	14
2.2.1 Undervoltage protection ($U_{<}$; 27).....	14
2.2.2 Overvoltage protection ($U_{>}$; 59).....	15
2.2.3 Neutral overvoltage protection ($U_{0>}$; 59N).....	15
2.2.4 Sequence voltage protection ($U_1/U_2>/<$; 47/27P/59NP).....	16
2.2.5 Vector jump ($\Delta\varphi$; 78).....	17
2.3 Frequency protections.....	18
2.3.1 Overfrequency and underfrequency protection ($f_{>}/<$; 81O/81U).....	18
2.3.2 Rate-of-change of frequency protection ($df/dt>/<$; 81R).....	18
2.4 Power protections.....	19
2.4.1 Overpower ($P_{>}$; 32O), underpower ($P_{<}$; 32U) and reverse power (P_r ; 32R) protection.....	19
2.4.2 Power protection ($P, Q, S>/<$; 32).....	20
2.5 Machine protections.....	20
2.5.1 Motor start/locked rotor monitoring ($I_{st>}$; 48/14).....	20
2.5.2 Power factor protection ($PF_{<}$; 55).....	21
2.5.3 Machine thermal overload protection ($TM_{>}$; 49M).....	22
2.6 Generator protections.....	23
2.6.1 Underimpedance protection ($Z_{<}$; 21U).....	23
2.6.2 Volts-per-hertz overexcitation protection ($V/Hz_{>}$; 24).....	23
2.6.3 Underexcitation protection ($Q_{<}$; 40).....	24
2.6.4 100 % stator earth fault protection ($U_{03rd>}$; 64S).....	24
2.7 Control functions.....	25
2.7.1 Synchrocheck ($\Delta V/\Delta a/\Delta f$; 25).....	25
2.7.2 Object control and monitoring.....	26
2.7.3 Programmable stage ($PSx>/<$; 99).....	27
2.7.4 Indicator object monitoring.....	27
2.7.5 Setting group selection.....	27
2.8 Monitoring functions.....	27
2.8.1 Voltage transformer supervision (60).....	27
2.8.2 Circuit breaker wear monitoring.....	28
2.8.3 Disturbance recorder.....	28
2.8.4 Current transformer supervision.....	29
2.8.5 Current total harmonic distortion.....	29
2.8.6 Voltage memory.....	30

3. Technical specifications

3.1 Electromagnetic compatibility.....	32
3.2 Mechanical durability.....	33
3.3 Environment.....	34
3.4 Safety.....	34

4. Hardware

4.1 Processor and power supply.....	36
4.1.1 Auxiliary supply.....	36
4.1.2 Isolated digital inputs.....	37
4.1.3 Digital outputs.....	37
4.1.4 Communication ports.....	38
4.2 Current measurement module.....	38
4.3 Voltage measurement module.....	40
4.4 Power and energy measurement.....	40
4.5 Frequency measurement.....	41
4.6 Digital inputs and outputs.....	41
4.6.1 Digital input module (option card B)	41
4.6.2 Digital output module (option card C).....	42
4.7 Analogue outputs.....	42
4.7.1 Analogue output module (mA out & mA in) (option card I).....	42
4.8 Additional communication options.....	43
4.8.1 Double ST 100 Mbps Ethernet communication module (option card H).....	43
4.8.2 Double LC 100 Mbps Ethernet communication module (option card J).....	43
4.8.3 RS-232 & serial fiber communication module (option cards L to O).....	43
4.9 Arc protection module (option card D).....	44
4.10 MVR-21x display.....	45
4.10.1 Display.....	45
4.11 Folios and configuration.....	46
4.12 Mechanical specifications.....	46
4.13 Environment.....	47
4.14 Safety.....	47
4.15 Dimensions.....	47

5. Ordering information

5.1 MVR Ordering.....	48
5.2.1 Disclaimer.....	49
5.2.2 Copyright.....	49

1. Product description

1.1 About

The MVR-G215 generator protection relay is well-suited for machines that require complete generator protections. MVR-G215 can be combined with MVR-T216 to protect larger machines that also require differential protection and greater protection redundancy. MVR-G215 communicates using various protocols, including the IEC 61850.

1.2 Applications


A wiring example and key ANSI functions are shown below.



More information

See the **Protections** chapter for a full list of the protections.

Generator protection wiring (G215)

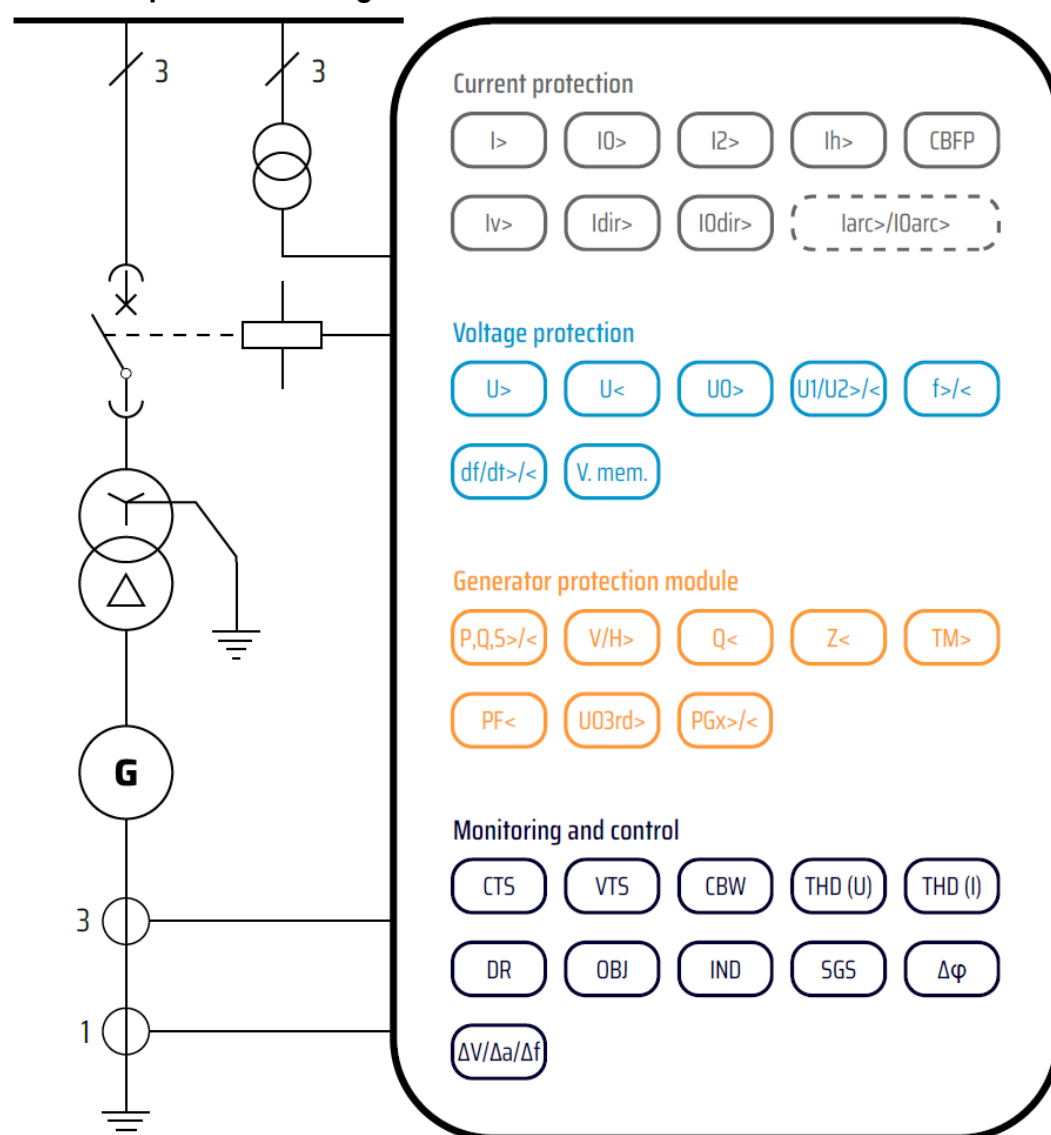

1.3 Features

	Functions
High performance, good usability	• Full protection for generators • Bay control, alarm, measurement and monitoring • Large customisable HMI with configurable Mimic diagram • Configurable LEDs • Large flash memory for events, logs, recordings and documentation ◦ 15,000 events and 100 disturbance recordings • Easy-to-use and powerful MVR Utility Software for setting, configuration and analysing • Full set of communication protocols, including IEC 61850
Versatile protection design	• Fast, versatile and dependable protection functions over a wide frequency range (6 to 75 Hz) • Suitable for the most demanding protection applications
Modularity	• Fully modular hardware construction • Plug in more I/O or communication cards to meet the application requirements
Usability	• Sophisticated setting aids • Highly customisable HMI • Storage of PDF or other supportive documents • Extensive user log information ◦ Setting changes ◦ Other operational history
Performance	• Sub-cycle instantaneous trip times • Logics editor for ladder logic functionality • Up to 100 disturbance records, of up to 10 seconds each • 10,000 events stored in non-volatile memory
Savings in engineering time	• MVR Utility Software free-of-charge software suite with an intuitive and easy-to-use human-machine interface • Download all relay settings instantly using native 100 Mb/s Ethernet connection (front port or rear port)
Standardised hardware	• Standardised hardware design, for simpler logistics and stock management • Five CT inputs with configurable secondary currents • Configurable digital input voltage thresholds
Communication	• Native Ethernet communication • A variety of standard protocols including the IEC 61850 substation communication standard with fast GOOSE messaging
IEC 61850 & IEEE 1588	• High-availability Seamless Redundancy (HSR) support • Parallel Redundancy Protocol (PRP) support • Precision Time Protocol (PTP) according to IEEE 1588

2. Protections

2.1 Current protections

2.1.1 Non-directional overcurrent protection ($I>$; 50/51)

Table 2.1 Technical data for the non-directional overcurrent function

Measurement inputs	
Current inputs	Phase current inputs: I_{L1} (A), I_{L2} (B), I_{L3} (C)
Current input magnitudes	RMS phase currents TRMS phase currents Peak-to-peak phase currents
Pick-up	
Pick-up current setting	$0.10...50.00 \times I_n$, setting step $0.01 \times I_n$
Inrush 2nd harmonic blocking	$0.10...50.00 \% I_{fund}$, setting step $0.01 \% I_{fund}$
Inaccuracy:	
- Current	$\pm 0.5 \% I_{set}$ or $\pm 15 \text{ mA}$ ($0.10...4.0 \times I_{set}$)
- 2 nd harmonic blocking	$\pm 1.0 \%$ -unit of the 2 nd harmonic setting
Operation time	
Definite time function operating time setting	$0.00...1800.00 \text{ s}$, setting step 0.005 s
Inaccuracy:	
- Definite time: I_m/I_{set} ratio > 3	$\pm 1.0 \%$ or $\pm 20 \text{ ms}$
- Definite time: I_m/I_{set} ratio $= 1.05...3$	$\pm 1.0 \%$ or $\pm 30 \text{ ms}$
IDMT setting parameters:	
- k Time dial setting for IDMT	$0.01...25.00$, step 0.01
- A IDMT constant	$0...250.0000$, step 0.0001
- B IDMT constant	$0...5.0000$, step 0.0001
- C IDMT constant	$0...250.0000$, step 0.0001
Inaccuracy:	
- IDMT operating time	$\pm 1.5 \%$ or $\pm 20 \text{ ms}$
- IDMT minimum operating time	$\pm 20 \text{ ms}$
Retardation time (overshoot)	$< 30 \text{ ms}$
Instant operation time	
Start time and instant operation time (trip):	
- I_m/I_{set} ratio > 3	$< 35 \text{ ms}$ (typically 25 ms)
- I_m/I_{set} ratio $= 1.05...3$	$< 50 \text{ ms}$
Start time and instant operation time (trip):	
- I_m/I_{set} ratio $= 2$	Typically 25 ms
- I_m/I_{set} ratio $= 5$	Typically 16 ms
- I_m/I_{set} ratio $= 10$	Typically 12 ms
Reset	
Reset ratio	97% of the pick-up current setting
Reset time setting	$0.010...10.000 \text{ s}$, step 0.005 s
Inaccuracy: Reset time	$\pm 1.0 \%$ or $\pm 50 \text{ ms}$
Instant reset time and start-up reset	$< 50 \text{ ms}$

NOTE The release delay does not apply to phase-specific tripping!

2.1.2 Non-directional earth fault protection ($I_0 > 50N/51N$)

Table 2.2 Technical data for the non-directional earth fault function

Measurement inputs	
Current input (selectable)	Residual current channel I_{01} (Coarse) Residual current channel I_{02} (Fine) Calculated residual current: I_{L1} (A), I_{L2} (B), I_{L3} (C)
Current input magnitudes	RMS residual current (I_{01} , I_{02} or calculated I_0) TRMS residual current (I_{01} or I_{02}) Peak-to-peak residual current (I_{01} or I_{02})
Pick-up	
Used magnitude	Measured residual current I_{01} (1 A) Measured residual current I_{02} (0.2 A) Calculated residual current I_{0Calc} (5 A)
Pick-up current setting	$0.0001...40.00 \times I_n$, setting step $0.0001 \times I_n$
Inaccuracy: - Starting I_{01} (1 A) - Starting I_{02} (0.2 A) - Starting I_{0Calc} (5 A)	$\pm 0.5 \% I_{0set}$ or ± 3 mA ($0.005...10.0 \times I_{set}$) $\pm 1.5 \% I_{0set}$ or ± 1.0 mA ($0.005...25.0 \times I_{set}$) $\pm 1.0 \% I_{0set}$ or ± 15 mA ($0.005...4.0 \times I_{set}$)
Operating time	
Definite time function operating time setting	$0.00...1800.00$ s, setting step 0.005 s
Inaccuracy: - Definite time: I_m/I_{set} ratio > 3 - Definite time: I_m/I_{set} ratio $= 1.05...3$	$\pm 1.0 \%$ or ± 20 ms $\pm 1.0 \%$ or ± 30 ms
IDMT setting parameters: - k Time dial setting for IDMT - A IDMT constant - B IDMT constant - C IDMT constant	$0.01...25.00$, step 0.01 $0...250.0000$, step 0.0001 $0...5.0000$, step 0.0001 $0...250.0000$, step 0.0001
Inaccuracy: - IDMT operating time - IDMT minimum operating time	$\pm 1.5 \%$ or ± 20 ms ± 20 ms
Retardation time (overshoot)	< 30 ms
Instant operation time	
Start time and instant operation time (trip): - I_m/I_{set} ratio > 3.5 - I_m/I_{set} ratio $= 1.05...3.5$	< 50 ms (typically 35 ms) < 55 ms
Reset	
Reset ratio	97 % of the pick-up current setting
Reset time setting	$0.010...10.000$ s, step 0.005 s
Inaccuracy: Reset time	$\pm 1.0 \%$ or ± 50 ms
Instant reset time and start-up reset	< 50 ms

NOTE The operation and reset time accuracy does **not** apply when the measured secondary current in I_{02} is $1...20$ mA. The pick-up is tuned to be more sensitive and the operation times vary because of this.

2.1.3 Directional overcurrent protection ($I_{dir}>$; 67)

Table 2.3 Technical data for the directional overcurrent function

Input signals	
Current inputs	Phase current inputs: I_{L1} (A), I_{L2} (B), I_{L3} (C)
Current input magnitudes	RMS phase currents TRMS phase currents Peak-to-peak phase currents
Current input calculations	Positive sequence current angle
Voltage inputs	U_{L1} , U_{L2} , U_{L3} U_{L12} , U_{L23} , $U_{L31} + U_0$
Voltage input calculations	Positive sequence voltage angle
Pick-up	
Characteristic direction	Directional, non-directional
Operating sector center	-180.0...180.0 deg, setting step 0.1 deg
Operating sector size (+/-)	1.00...170.00 deg, setting step 0.10 deg
Pick-up current setting	0.10...40.00 $\times I_n$, setting step 0.01 $\times I_n$
Inaccuracy:	
- Current	$\pm 0.5 \% I_{set}$ or ± 15 mA (0.10...4.0 $\times I_{set}$)
- $U1/I1$ angle ($U > 15$ V)	$\pm 0.20^\circ$
- $U1/I1$ angle ($U = 1...15$ V)	$\pm 1.5^\circ$
Operation time	
Definite time function operating time setting	0.00...1800.00 s, setting step 0.005 s
Inaccuracy:	
- Definite time: I_m/I_{set} ratio > 3	$\pm 1.0 \%$ or ± 20 ms
- Definite time: I_m/I_{set} ratio = 1.05...3	$\pm 1.0 \%$ or ± 35 ms
IDMT setting parameters:	
- k Time dial setting for IDMT	0.01...25.00, step 0.01
- A IDMT constant	0...250.0000, step 0.0001
- B IDMT constant	0...5.0000, step 0.0001
- C IDMT constant	0...250.0000, step 0.0001
Inaccuracy:	
- IDMT operating time	$\pm 1.5 \%$ or ± 20 ms
- IDMT minimum operating time	± 20 ms
Instant operation time	
Start time and instant operation time (trip):	
- I_m/I_{set} ratio > 3	< 40 ms (typically 30 ms)
- I_m/I_{set} ratio = 1.05...3	< 50 ms
Reset	
Reset ratio:	
- Current	97 % of the pick-up current setting
- $U1/I1$ angle	2.0°
Reset time setting	0.010...10.000 s, step 0.005 s
Inaccuracy: Reset time	$\pm 1.0 \%$ or ± 50 ms
Instant reset time and start-up reset	< 50 ms

NOTE The minimum voltage for direction solving is 1.0 V secondary. During three-phase short-circuits the angle memory is active for 0.5 seconds in case the voltage drops below 1.0 V.

2.1.4 Directional earth fault protection ($I_{0dir}>$; 67N/32N)

Table 2.4 Technical data for the directional earth fault function

Measurement inputs	
Current input (selectable)	Residual current channel I_{01} (Coarse) Residual current channel I_{02} (Fine) Calculated residual current: I_{L1} (A), I_{L2} (B), I_{L3} (C)
Current input magnitudes	RMS residual current (I_{01} , I_{02} or calculated I_0) TRMS residual current (I_{01} or I_{02}) Peak-to-peak residual current (I_{01} or I_{02})
Voltage input (selectable)	Residual voltage from U3 or U4 voltage channel Residual voltage calculated from U_{L1} , U_{L2} , U_{L3}
Voltage input magnitudes	RMS residual voltage U_0 Calculated RMS residual voltage U_0
Pick-up	
Characteristic direction	Unearthed (Varmetric 90°) Petersen coil GND (Wattmetric 180°) <u>Earthed</u> (Adjustable sector)
When the <u>earthed</u> mode is active:	
- Tripping area center	0.00...360.00 deg, setting step 0.10 deg
- Tripping area size (+/-)	45.00...135.00 deg, setting step 0.10 deg
Pick-up current setting	0.005...40.00 $\times I_n$, setting step 0.001 $\times I_n$
Pick-up voltage setting	1.00...75.00 % U_{0n} , setting step 0.01 % U_{0n}
Inaccuracy:	
- Starting I_{01} (1 A)	$\pm 0.5 \% I_{0set}$ or ± 3 mA (0.005...10.0 $\times I_{set}$)
- Starting I_{02} (0.2 A)	$\pm 1.5 \% I_{0set}$ or ± 1.0 mA (0.005...25.0 $\times I_{set}$)
- Starting I_{0Calc} (5 A)	$\pm 1.5 \% I_{0set}$ or ± 15 mA (0.005...4.0 $\times I_{set}$)
- Voltage U_0 and U_{0Calc}	$\pm 1.0 \% U_{0set}$ or ± 30 mV
- U_0/I_0 angle ($U > 15$ V)	$\pm 0.2^\circ$ ($I_{0Calc} \pm 1.0^\circ$)
- U_0/I_0 angle ($U = 1...15$ V)	$\pm 1.0^\circ$
Operation time	
Definite time function operating time setting	0.00...1800.00 s, setting step 0.005 s
Inaccuracy:	
- Definite time (I_m/I_{set} ratio 1.05→)	$\pm 1.0 \%$ or ± 45 ms
IDMT setting parameters:	
- k Time dial setting for IDMT	0.01...25.00, step 0.01
- A IDMT constant	0...250.0000, step 0.0001
- B IDMT constant	0...5.0000, step 0.0001
- C IDMT constant	0...250.0000, step 0.0001
Inaccuracy:	
- IDMT operating time	$\pm 1.5 \%$ or ± 25 ms
- IDMT minimum operating time	± 20 ms
Instant operation time	
Start time and instant operation time (trip):	
- I_m/I_{set} ratio > 3	< 55 ms (typically 45 ms)
- I_m/I_{set} ratio = 1.05...3	< 65 ms
Reset	

Current and voltage reset U0/I0 angle	97 % of the pick-up current and voltage setting 2.0°
Reset time setting Inaccuracy: Reset time	0.000...150.000 s, step 0.005 s ±1.0 % or ±45 ms
Instant reset time and start-up reset	<50 ms

2.1.5 Negative sequence overcurrent/ phase current reversal/ current unbalance protection (I2>; 46/46R/46L)

Table 2.5 Technical data for the current unbalance function

Measurement inputs	
Current inputs	Phase current inputs: I_{L1} (A), I_{L2} (B), I_{L3} (C)
Current input calculations	Positive sequence current (I1) Negative sequence current (I2)
Pick-up	
Used magnitude	Negative sequence component I2pu Relative unbalance I2/I1
Pick-up setting	0.01...40.00 × I_n , setting step 0.01 × I_n (I2pu) 1.00...200.00 %, setting step 0.01 % (I2/I1)
Minimum phase current (at least one phase above)	0.01...2.00 × I_n , setting step 0.01 × I_n
Inaccuracy: - Starting I2pu - Starting I2/I1	±1.0 %-unit or ±100 mA (0.10...4.0 × I_n) ±1.0 %-unit or ±100 mA (0.10...4.0 × I_n)
Operating time	
Definite time function operating time setting	0.00...1800.00 s, setting step 0.005 s
Inaccuracy: - Definite time (I_m/I_{set} ratio > 1.05)	±1.5 % or ±60 ms
IDMT setting parameters: - k Time dial setting for IDMT - A IDMT Constant - B IDMT Constant - C IDMT Constant	0.01...25.00, step 0.01 0...250.0000, step 0.0001 0...5.0000, step 0.0001 0...250.0000, step 0.0001
Inaccuracy: - IDMT operating time - IDMT minimum operating time	±2.0 % or ±30 ms ±20 ms
Retardation time (overshoot)	<5 ms
Instant operation time	
Start time and instant operation time (trip): - I_m/I_{set} ratio > 1.05	<70 ms
Reset	
Reset ratio	97 % of the pick-up setting
Reset time setting Inaccuracy: Reset time	0.010...10.000 s, step 0.005 s ±1.5 % or ±60 ms
Instant reset time and start-up reset	<55 ms

2.1.6 Circuit breaker failure protection (CBFP; 50BF/52BF)

Table 2.6 Technical data for the circuit breaker failure protection function

Measurement inputs	
Current inputs	Phase current inputs: I_{L1} (A), I_{L2} (B), I_{L3} (C) Residual current channel I_{01} (Coarse) Residual current channel I_{02} (Fine)
Current input magnitudes	RMS phase currents RMS residual current (I_{01} , I_{02} or calculated I_0)
Pick-up	
Monitored signals	Digital input status, digital output status, logical signals
Pick-up current setting: - $IL1...IL3$ - I_{01} , I_{02} , I_{0Calc}	$0.10...40.00 \times I_N$, setting step $0.01 \times I_N$ $0.005...40.00 \times I_N$, setting step $0.005 \times I_N$
Inaccuracy: - Starting phase current (5A) - Starting I_{01} (1 A) - Starting I_{02} (0.2 A) - Starting I_{0Calc} (5 A)	$\pm 0.5 \% I_{SET}$ or ± 15 mA ($0.10...4.0 \times I_{SET}$) $\pm 0.5 \% I_{0SET}$ or ± 3 mA ($0.005...10.0 \times I_{SET}$) $\pm 1.5 \% I_{0SET}$ or ± 1.0 mA ($0.005...25.0 \times I_{SET}$) $\pm 1.0 \% I_{0SET}$ or ± 15 mA ($0.005...4.0 \times I_{SET}$)
Operation time	
Definite time function operating time setting	$0.050...1800.000$ s, setting step 0.005 s
Inaccuracy: - Current criteria (I_M/I_{SET} ratio $1.05 \rightarrow$) - DO or DI only	± 1.0 % or ± 55 ms ± 15 ms
Reset	
Reset ratio	97 % of the pick-up current setting
Reset time	<50 ms

2.1.7 Harmonic overcurrent protection (I_h >; 50H/51H/68H)

Table 2.7 Technical data for the harmonic overcurrent function

Measurement inputs	
Current inputs	Phase current inputs: I_{L1} (A), I_{L2} (B), I_{L3} (C) Residual current channel I_{01} (Coarse) Residual current channel I_{02} (Fine)
Pick-up	
Harmonic selection	2 nd , 3 rd , 4 th , 5 th , 6 th , 7 th , 9 th , 11 th , 13 th , 15 th , 17 th or 19 th
Used magnitude	Harmonic per unit ($\times I_N$) Harmonic relative (I_h/IL)
Pick-up setting	$0.05...2.00 \times I_N$, setting step $0.01 \times I_N$ ($\times I_N$) $5.00...200.00$ %, setting step 0.01 % (I_h/IL)
Inaccuracy: - Starting $\times I_N$ - Starting $\times I_h/IL$	$<0.03 \times I_N$ (2 nd , 3 rd , 5 th) $<0.03 \times I_N$ tolerance to I_h (2 nd , 3 rd , 5 th)
Operation time	
Definite time function operating time setting	$0.00...1800.00$ s, setting step 0.005 s
Inaccuracy:	

- Definite time (I_M/I_{SET} ratio >1.05)	$\pm 1.0\%$ or $\pm 35\text{ ms}$
IDMT setting parameters:	
k Time dial setting for IDMT	0.01...25.00, step 0.01
A IDMT constant	0...250.0000, step 0.0001
B IDMT constant	0...5.0000, step 0.0001
C IDMT constant	0...250.0000, step 0.0001
Inaccuracy:	
- IDMT operating time	$\pm 1.5\%$ or $\pm 20\text{ ms}$
- IDMT minimum operating time	$\pm 20\text{ ms}$
Instant operation time	
Start time and instant operation time (trip):	
I_M/I_{SET} ratio >1.05	<50 ms
Reset	
Reset ratio	95 % of the pick-up setting
Reset time setting	0.010...10.000 s, step 0.005 s
Inaccuracy: Reset time	$\pm 1.0\%$ or $\pm 35\text{ ms}$
Instant reset time and start-up reset	<50 ms

NOTE Harmonics generally: The amplitude of the harmonic content must be least $0.02 \times I_N$ when the relative mode (Ih/IL) is used!

Blocking: To achieve fast activation for blocking purposes with the harmonic overcurrent stage, note that the harmonic stage may be activated by a rapid load change or fault situation. An intentional activation lasts for approximately 20 ms if a harmonic component is not present. The harmonic stage stays active if the harmonic content is above the pick-up limit.

Tripping: When using the harmonic overcurrent stage for tripping, please ensure that the operation time is set to 20 ms (DT) or longer to avoid nuisance tripping caused by the above-mentioned reasons.

2.1.8 Voltage-restrained overcurrent protection ($I_V >$; 51V)

Table 2.8 Technical data for the voltage-restrained overcurrent protection function.

Measurement inputs	
Current inputs	Phase current inputs: I_{L1} (A), I_{L2} (B), I_{L3} (C)
Current input magnitudes	RMS phase currents
Voltage inputs	U_{L1}, U_{L2}, U_{L3} $U_{L12}, U_{L23}, U_{L31} + U_0$
Voltage input calculation	Positive sequence voltage
Pick-up	
Pick-up current setting (point 1 & 2)	$0.10...40.00 \times I_N$, setting step $0.01 \times I_N$
Pick-up voltage setting (point 1 & 2)	$0.05...150.00\% U_N$, setting step $0.01\% U_N$
Inaccuracy:	
- Current	$\pm 0.5\% I_{SET}$ or $\pm 15\text{ mA}$ ($0.10...4.0 \times I_{SET}$)
- Voltage	$\pm 1.5\% U_{SET}$ or $\pm 30\text{ mV}$
Operation time	
Definite time function operating time setting	0.00...1800.00 s, setting step 0.005 s
Inaccuracy:	
- Definite time (I_M/I_{SET} ratio 1.05→)	$\pm 1.0\%$ or $\pm 25\text{ ms}$

IDMT setting parameters:		
k	Time dial setting for IDMT	0.01...25.00, step 0.01
A	IDMT constant	0...250.0000, step 0.0001
B	IDMT constant	0...5.0000, step 0.0001
C	IDMT constant	0...250.0000, step 0.0001
Inaccuracy:		
-	IDMT operating time	±1.5 % or ±20 ms
-	IDMT minimum operating time	±20 ms
Instant operation time		
Start time and instant operation time (trip):		
-	I_M/I_{SET} ratio 1.05→	<40 ms
Reset		
Reset ratio:		
-	Current	97 % of the pick-up current setting
Reset time setting		
Inaccuracy:	Reset time	0.000...150.000 s, step 0.005 s ±1.0 % or ±25 ms
Instant reset time and start-up reset		
<45 ms		

2.1.9 Arc fault protection (IArc>/IOArc>; 50Arc/50NArc) (optional)

NOTE Not approved for marine.

Table 2.9 Technical data for the arc fault protection function.

Measurement inputs	
Current inputs	Phase current inputs: I_{L1} (A), I_{L2} (B), I_{L3} (C) Residual current channel I_{01} (Coarse) Residual current channel I_{02} (Fine)
Current input magnitudes	Sample-based phase current measurement Sample-based residual current measurement
Arc point sensor inputs	Channels S1, S2, S3, S4 (pressure and light sensor, or light-only sensor) Up to three (3) sensors per channel
System frequency operating range	6.00...75.00 Hz
Pick-up	
Pick-up current setting (phase current)	$0.50...40.00 \times I_N$, setting step $0.01 \times I_N$
Pick-up current setting (residual current)	$0.10...40.00 \times I_N$, setting step $0.01 \times I_N$
Pick-up light intensity	8, 25 or 50 kLx (the sensor is selected in the order code)
Starting inaccuracy (IArc> and IOArc>)	±3 % of the set pick-up value > $0.5 \times I_N$ setting. $5 \text{ mA} < 0.5 \times I_N$ setting.
Point sensor detection radius	180 degrees
Operation time	
Light only:	
- Semiconductor outputs HSO1 and HSO2	Typically 7 ms (3...12 ms)
- Regular relay outputs	Typically 10 ms (6.5...15 ms)
Light + current criteria (zone 1...4):	
- Semiconductor outputs HSO1 and HSO2	Typically 10 ms (6.5...14 ms)
- Regular relay outputs	Typically 14 ms (10...18 ms)
Arc BI only:	
- Semiconductor outputs HSO1 and HSO2	Typically 7 ms (2...12 ms)
- Regular relay outputs	Typically 10 ms (6.5...15 ms)

Reset	
Reset ratio for current	97 % of the pick-up setting
Reset time	<35 ms

2.2 Voltage protections

2.2.1 Undervoltage protection ($U<$; 27)

Table 2.10 Technical data for the undervoltage function

Measurement inputs	
Voltage inputs	U_{L1}, U_{L2}, U_{L3} $U_{L12}, U_{L23}, U_{L31}$ (+ U_0)
Voltage input magnitudes	RMS line-to-line or line-to-neutral voltages
Pick-up	
Pick-up terms	1 voltage 2 voltages 3 voltages
Pick-up setting	0.00...120.00 % U_N , setting step 0.01 % U_N
Inaccuracy: - Voltage	± 1.5 % U_{SET} or ± 30 mV
Low voltage block	
Pick-up setting	0.00...80.00 % U_N , setting step 0.01 % U_N
Inaccuracy: - Voltage	± 1.5 % U_{SET} or ± 30 mV
Operation time	
Definite time function operating time setting	0.00...1800.00 s, setting step 0.005 s
Inaccuracy: - Definite time (U_M/U_{SET} ratio 1.05 $\rightarrow$)	± 1.0 % or ± 35 ms
IDMT setting parameters:	
k Time dial setting for IDMT	0.01...25.00, step 0.01
A IDMT constant	0...250.0000, step 0.0001
B IDMT constant	0...5.0000, step 0.0001
C IDMT constant	0...250.0000, step 0.0001
Inaccuracy: - IDMT operating time - IDMT minimum operating time	± 1.5 % or ± 20 ms ± 20 ms
Instant operation time	
Start time and instant operation time (trip): - U_M/U_{SET} ratio 1.05 $\rightarrow$	<65 ms
Retardation time (overshoot)	<30 ms
Reset	
Reset ratio	103 % of the pick-up voltage setting
Reset time setting Inaccuracy: Reset time	0.010...10.000 s, step 0.005 s ± 1.0 % or ± 45 ms
Instant reset time and start-up reset	<50 ms

- NOTE** The low-voltage block is not in use when its pick-up setting is set to 0 %. The undervoltage function trip signal is active when the LV block is disabled and the device has no voltage injection.
- NOTE** After the low voltage blocking condition, the undervoltage stage does not trip unless the voltage exceeds the pick-up setting first.

2.2.2 Overvoltage protection ($U>$; 59)

Table 2.11 Technical data for the overvoltage function

Measurement inputs	
Voltage inputs	U_{L1}, U_{L2}, U_{L3} $U_{L12}, U_{L23}, U_{L31} (+ U_0)$
Voltage input magnitudes	RMS line-to-line or line-to-neutral voltages
Pick-up	
Pick-up terms	1 voltage 2 voltages 3 voltages
Pick-up setting	50.00...150.00 % U_N , setting step 0.01 % U_N
Inaccuracy: - Voltage	± 1.5 % U_{SET}
Operating time	
Definite time function operating time setting	0.00...1800.00 s, setting step 0.005 s
Inaccuracy: - Definite time (U_M/U_{SET} ratio 1.05→)	± 1.0 % or ± 35 ms
IDMT setting parameters:	
k Time dial setting for IDMT	0.01...25.00, step 0.01
A IDMT constant	0...250.0000, step 0.0001
B IDMT constant	0...5.0000, step 0.0001
C IDMT constant	0...250.0000, step 0.0001
Inaccuracy: - IDMT operating time - IDMT minimum operating time	± 1.5 % or ± 20 ms ± 20 ms
Instant operation time	
Start time and instant operation time (trip): - U_M/U_{SET} ratio 1.05→	<50 ms
Reset	
Reset ratio	97 % of the pick-up voltage setting
Reset time setting	0.010...10.000 s, step 0.005 s
Inaccuracy: Reset time	± 1.0 % or ± 45 ms
Instant reset time and start-up reset	<50 ms

2.2.3 Neutral overvoltage protection ($U0>$; 59N)

Table 2.12 Technical data for the neutral overvoltage function

Measurement inputs	
Voltage input (selectable)	Residual voltage from U3 or U4 voltage channel Residual voltage calculated from U_{L1}, U_{L2}, U_{L3}
Voltage input magnitudes	RMS residual voltage U_0

	Calculated RMS residual voltage U_0
Pick-up	
Pick-up voltage setting	1.00...50.00 % U_{0N} , setting step $0.01 \times I_N$
Inaccuracy:	
- Voltage U_0	$\pm 1.5 \% U_{0SET}$ or ± 30 mV
- Voltage U_{0Calc}	± 150 mV
Operation time	
Definite time function operating time setting	0.00...1800.00 s, setting step 0.005 s
Inaccuracy:	
- Definite time (U_{0M}/U_{0SET} ratio 1.05→)	± 1.0 % or ± 45 ms
IDMT setting parameters:	
k Time dial setting for IDMT	0.01...25.00, step 0.01
A IDMT constant	0...250.0000, step 0.0001
B IDMT constant	0...5.0000, step 0.0001
C IDMT constant	0...250.0000, step 0.0001
Inaccuracy:	
- IDMT operating time	± 1.5 % or ± 20 ms
- IDMT minimum operating time	± 20 ms
Instant operation time	
Start time and instant operation time (trip):	
- U_{0M}/U_{0SET} ratio 1.05→	<50 ms
Reset	
Reset ratio	97 % of the pick-up voltage setting
Reset time setting	0.000 ... 150.000 s, step 0.005 s
Inaccuracy: Reset time	± 1.0 % or ± 50 ms
Instant reset time and start-up reset	<50 ms

2.2.4 Sequence voltage protection ($U_1/U_2>/<; 47/27P/59NP$)

Table 2.13 Technical data for the sequence voltage function

Measurement inputs	
Voltage inputs	U_{L1}, U_{L2}, U_{L3} $U_{L12}, U_{L23}, U_{L31}$ (+ U_0)
Voltage input calculations	Positive sequence voltage (I1) Negative sequence voltage (I2)
Pick-up	
Pick-up setting	5.00...150.00 % U_N , setting step 0.01 % U_N
Inaccuracy:	
- Voltage	$\pm 1.5 \% U_{SET}$ or ± 30 mV
Low voltage block	
Pick-up setting	1.00...80.00 % U_N , setting step 0.01 % U_N
Inaccuracy:	
-Voltage	$\pm 1.5 \% U_{SET}$ or ± 30 mV
Operation time	
Definite time function operating time setting	0.00...1800.00 s, setting step 0.005 s
Inaccuracy	

-Definite Time (U_M/U_{SET} ratio 1.05→)	±1.0 % or ±35 ms
IDMT setting parameters:	
k Time dial setting for IDMT	0.01...25.00, step 0.01
A IDMT constant	0...250.0000, step 0.0001
B IDMT constant	0...5.0000, step 0.0001
C IDMT constant	0...250.0000, step 0.0001
Inaccuracy:	
- IDMT operating time	±1.5 % or ±20 ms
- IDMT minimum operating time	±20 ms
Instant operation time	
Start time and instant operation time (trip): - U_M/U_{SET} ratio <0.95/1.05→	<65 ms
Reset	
Reset ratio	97 or 103 % of the pick-up voltage setting
Reset time setting	0.010...10.000 s, step 0.005 s
Inaccuracy: Reset time	±1.0 % or ±35 ms
Instant reset time and start-up reset	<50 ms

2.2.5 Vector jump ($\Delta\varphi$; 78)

Table 2.14 Technical data for the vector jump protection function

Measurement inputs	
Voltage inputs	U_{L1}, U_{L2}, U_{L3} $U_{L12}, U_{L23}, U_{L31} + U_0$
Monitored voltages	Any or all system line-to-line voltage(s) Any or all system line-to-neutral voltage(s) Specifically chosen line-to-line or line-to-neutral voltage U4 channel voltage
Pick-up	
Pick-up setting	0.05...30.00°, setting step 0.01°
Inaccuracy:	
- Voltage angle	±30% overreach or 1.00 °
Low-voltage blocking	
Pick-up setting	0.01...100.00 % U_N , setting step 0.01 % U_N
Inaccuracy:	
- Voltage	±1.5 % U_{SET} or ±30 mV
Instant operation time	
Alarm and trip operation time: - (I_m/I_{set} ratio > ±30% overreach or 1.00 °)	<40 ms (typically 30 ms) 50/60 Hz <50 ms (typically 40 ms) 16.67 Hz
Reset	
Trip pulse	~5-10ms

2.3 Frequency protections

2.3.1 Overfrequency and underfrequency protection ($f > / <$; 81O/81U)

Table 2.15 Technical data for the overfrequency and underfrequency function

Input signals	
Sampling mode	Fixed Tracking
Frequency reference 1	CT1IL1, CT2IL1, VT1U1, VT2U1
Frequency reference 2	CT1IL2, CT2IL2, VT1U2, VT2U2
Frequency reference 3	CT1IL3, CT2IL3, VT1U3, VT2U3
Pick-up	
$f >$ pick-up setting	10.00...70.00 Hz, setting step 0.01 Hz
$f <$ pick-up setting	7.00...65.00 Hz, setting step 0.01 Hz
Inaccuracy (sampling mode):	
- Fixed	± 20 mHz (50/60 Hz fixed frequency)
- Tracking	± 20 mHz ($U > 30$ V secondary) ± 20 mHz ($I > 30$ % of rated secondary)
Operation time	
Definite time function operating time setting	0.00...1800.00 s, setting step 0.005 s
Inaccuracy:	
- Definite time (I_M/I_{SET} ratio ± 50 mHz)	± 1.5 % or ± 50 ms (max. step size: 100 mHz)
Instant operation time	
Start time and instant operation time (trip):	
- I_M/I_{SET} ratio ± 50 mHz (Fixed)	< 70 ms (max. step size: 100 mHz)
- I_M/I_{SET} ratio ± 50 mHz (Tracking)	< 3 cycles or < 60 ms (max. step size: 100 mHz)
Reset	
Reset ratio	0.020 Hz
Instant reset time and start-up reset:	
- I_M/I_{SET} ratio ± 50 mHz (Fixed)	< 110 ms (max. step size: 100 mHz)
- I_M/I_{SET} ratio ± 50 mHz (Tracking)	< 3 cycles or < 70 ms (max. step size: 100 mHz)

NOTE The secondary voltage must exceed 2 volts or the current must exceed 0.25 amperes (peak-to-peak) in order for the function to measure frequency.

NOTE The frequency is measured two seconds after a signal is received.

2.3.2 Rate-of-change of frequency protection ($df/dt > / <$; 81R)

Table 2.16 Technical data of the rate-of-change of frequency function

Input signals	
Sampling mode	Fixed Tracking
Frequency reference 1	CT1IL1, CT2IL1, VT1U1, VT2U1
Frequency reference 2	CT1IL2, CT2IL2, VT1U2, VT2U2
Frequency reference 3	CT1IL3, CT2IL3, VT1U3, VT2U3
Pick-up	
$Df/dt > / <$ pick-up setting	0.15...1.00 Hz/s, setting step 0.01 Hz
$f >$ limit	10.00...70.00 Hz, setting step 0.01 Hz

f < limit	7.00...65.00 Hz, setting step 0.01 Hz
Pick-up inaccuracy	
Df/dt	$\pm 5.0 \% I_{SET}$ or ± 20 mHz/s
Frequency	± 15 mHz ($U > 30$ V secondary) ± 20 mHz ($I > 30$ % of rated secondary)
Operation time	
Definite time function operating time setting	0.00...1800.00 s, setting step 0.005 s
Inaccuracy: - Definite time (I_M/I_{SET} ratio +/- 50 mHz)	± 1.5 % or ± 110 ms (max. step size: 100 mHz)
Start time and instant operation time (trip):	
f_M/f_{SET} ratio +/- 20 mHz (overreach)	<180 ms
f_M/f_{SET} ratio +/- 200 mHz (overreach)	<90 ms
Reset	
Reset ratio (frequency limit)	0.020 Hz
Instant reset time and start-up reset - f_M/f_{SET} ratio +/- 50 mHz	<2 cycles or <60 ms (max. step size: 100 mHz)

NOTE The frequency is measured two seconds after a signal is received.

2.4 Power protections

2.4.1 Overpower (P> 32O), underpower (P< 32U) and reverse power (Pr; 32R) protection

Table 2.17 Technical data for the power protection functions

Measurement inputs	
Current inputs	Phase current inputs: I_{L1} (A), I_{L2} (B), I_{L3} (C)
Voltage inputs	U_{L1} , U_{L2} , U_{L3} U_{L12} , U_{L23} , U_{L31} (+ U_0)
Calculated measurement	Three-phase active power
Pick-up	
P> Prev>	0.10...150 000.00 kW, setting step 0.01 kW -15 000.00...-1.00 kW, setting step 0.01 kW
P< Low-power blocking $P_{SET<}$	0.00...150 000.00 kW, setting step 0.01 kW 0.00...100 000.00 kW, setting step 0.01 kW
Inaccuracy: - Active power	Typically <1.0 % P_{SET}
Operation time	
Definite time function operating time setting	0.00...1800.00 s, setting step 0.005 s
Inaccuracy: - Definite time (P_M/P_{SET} ratio 1.05→)	± 1.0 % or ± 35 ms
Instant operation time	
Start time and instant operation time (trip): - P_M/P_{SET} ratio 1.05→	<50 ms
Reset	

Reset ratio	97 or 103 %P _{SET}
Reset time setting	0.000...150.000 s, step 0.005 s
Inaccuracy: Reset time	±1.0 % or ±35 ms
Instant reset time and start-up reset	<50 ms

2.4.2 Power protection (P, Q, S)>/<; 32)

Table 2.18 Technical data for the power protection function

Measurement inputs	
Current inputs	Phase current inputs: I _{L1} (A), I _{L2} (B), I _{L3} (C)
Voltage inputs	U _{L1} , U _{L2} , U _{L3} U _{L12} , U _{L23} , U _{L31} (+ U ₀)
Calculated measurements	Three-phase active, reactive or apparent power (P, Q or S) value based on the chosen or set nominal amplitude.
Pick-up	
Comparator selection	> or <
> or <	-500.000...500.000 %/MVA _N , setting step 0.005 %/MVA _N
Inaccuracy:	
- Active, reactive, or apparent power	Typically <1.0 %P _{SET}
Operation time	
Definite time function operating time setting	0.00...1800.00 s, setting step 0.005 s
Inaccuracy:	
- Definite time (P _M /P _{SET} ratio 1.05→)	±1.0 % or ±35 ms
Instant operation time	
Start time and instant operation time (trip):	
- PQS _M /PQS _{SET} ratio 1.05→	<40 ms
Reset	
Reset ratio	97 or 103 %P _{SET}
Instant reset time and start-up reset	<40 ms

2.5 Machine protections

2.5.1 Motor start/locked rotor monitoring (I_{st}>; 48/14)

Table 2.19 Technical data for the motor start/locked rotor monitoring function

Measurement inputs	
Current inputs	Phase current inputs: I _{L1} (A), I _{L2} (B), I _{L3} (C)
Current input magnitudes	RMS phase currents
Pick-up	
Pick-up current setting	0.10...40.00 × I _N , setting step 0.10 × I _N
Inaccuracy:	
- Current	±0.5 %I _{SET} or ±15 mA (0.10...4.0 × I _{SET})
Time settings	
Starting time setting	0.00...1800.00 s, setting step 0.005 s

Operating mode	Definite time or cumulative I ² t sum inverse operating time With or without a speed switch input Monitors only starts or both starts and stall
Start time	Max. 5 ms from the detected start-up or locked rotor situation
Inaccuracy: - Starting - Definite time operating time	±3% of the set pick-up value > 0.5 × I _N setting, 5 mA < 0.5 × I _N setting ±0.5 % or ±10 ms
Operation time	
Definite time function operating time setting	0.00...1800.00 s, setting step 0.005 s
Cumulative I ² t sum inverse operation time	0.00...1800.00 s, setting step 0.005 s
Inaccuracy: - Definite time (I _M /I _{SET} ratio 0.95)	±1.0 % or ±40 ms
Instant operation time	
Start time and instant operation time (trip): - I _M /I _{SET} ratio 1.05→	<55 ms
Reset	
Reset ratio	97 % of the pick-up current setting
Reset time setting Inaccuracy: Reset time	0.010 ...150.000 s, step 0.005 s ±1.0 % or ±35 ms
Instant reset time and start-up reset	<55 ms

2.5.2 Power factor protection (PF< 55)

Table 2.20 Technical data for the power factor protection function

Measurement inputs	
Current inputs	Phase current inputs: I _{L1} (A), I _{L2} (B), I _{L3} (C)
Voltage inputs	U _{L1} , U _{L2} , U _{L3} U _{L12} , U _{L23} , U _{L31} (+ U ₀)
Calculated measurement	Three-phase power factor
Pick-up	
Pick-up setting	0.00...0.99, setting step 0.01
Inaccuracy: - power factor (when U > 1.0 V and I > 0.1 A)	±0.001
Operation time	
Definite time function operating time setting	0.00...1800.00 s, setting step 0.005 s
Inaccuracy: - Definite time (at least 0.01 below the setting)	±1.0 % or ±30 ms
Instant operation time	
Start time and instant operation time (trip): - at least 0.01 below the setting	<50 ms
Reset	
Reset ratio	1.03 of the power factor setting
Reset time	<50 ms

NOTE The minimum voltage for the power factor calculation is 1.0 V secondary and the minimum current is 0.1 A secondary.

2.5.3 Machine thermal overload protection (TM>; 49M)

Table 2.21 Technical data for the machine thermal overload protection function.

Measurement inputs	
Current inputs	Phase current inputs: I_{L1} (A), I_{L2} (B), I_{L3} (C)
Current input magnitudes	TRMS phase currents (up to the 31 st harmonic)
Pick-up (Heating)	
NPS bias factor (unbalance effect)	0.1...10.0, setting step 0.1
Pick-up current setting	0.10...40.00 $\times I_N$, setting step 0.01 $\times I_N$
Thermal alarm and trip level setting range	0.0...150.0 %, setting step 0.1 %
Motor service factor	0.01...5.00 $\times I_N$, setting step 0.01 $\times I_N$
Cold condition:	
- Long heat T const (cold)	0.0...500.0 min, setting step 0.1 min
- Short heat T const (cold)	0.0...500.0 min, setting step 0.1 min
Hot condition:	
- Long heat T const (hot)	0.0...500.0 min, setting step 0.1 min
- Short heat T const (hot)	0.0...500.0 min, setting step 0.1 min
- Hot condition theta limit (Cold → Hot spot)	0.00...100.00 %, setting step 0.01 %
Reset (Cooling)	
Reset ratio (pick-up and alarms)	99 %
Stop condition:	
- Long cool T const (stop)	0.0...500.0 min, setting step 0.1 min
- Short cool T const (stop)	0.0...500.0 min, setting step 0.1 min
- Short cool T in use time	0.0...3000.0 min, setting step 0.1 min
Run condition:	
- Long cool T const (stop)	0.0...500.0 min, setting step 0.1 min
Operation time	
Definite time function operating time setting	0.0...3600.0 s, setting step 0.1 s
Inaccuracy:	
- Pick-up and reset	± 1.0 % or ± 500 ms
Environmental settings	
Thermal replica temperature estimates	Selectable between °C and °F
Ambient temperature effect	Linear or manually set curve
k min. and max. range	0.01...5.00 $\times I_N$, setting step 0.01 $\times I_N$
Ambient temperature min. and max. range	-60...500 deg, setting step 1 deg
Thermal model biasing (ambient):	
- Set ambient temperature	-60...500 deg, setting step 1 deg

2.6 Generator protections

2.6.1 Underimpedance protection ($Z<$; 21U)

Table 2.22 Technical data for the underimpedance function

Measurement inputs	
Current inputs	Phase current inputs: I_{L1} (A), I_{L2} (B), I_{L3} (C)
Voltage inputs	U_{L1} , U_{L2} , U_{L3} U_{L12} , U_{L23} , U_{L31} + U_0
Calculated impedances	Phase-to-phase impedances Phase-to-ground impedances Positive sequence impedance
Pick-up	
Pick-up setting	0.1...150.0 Ω , setting step 0.1 Ω
Inaccuracy: - Impedance calculation	Typically <1.0 % Z_{SET}
Operation time	
Definite time function operating time setting	0.00...1800.00 s, setting step 0.005 s
Inaccuracy: - Definite time (Z_M/Z_{SET} ratio <0.95)	± 1.0 % or ± 25 ms
Instant operation time	
Start time and instant operation time (trip): - Z_M/Z_{SET} ratio <0.95	<45 ms
Reset	
Reset ratio	103 % Z_{SET}
Reset time setting	0.010...150.000 s, step 0.005 s
Inaccuracy: Reset time	± 1.0 % or ± 25 ms
Instant reset time and start-up reset	<45 ms

2.6.2 Volts-per-hertz overexcitation protection ($V/Hz>$; 24)

Table 2.23 Technical data for the volts-per-hertz overexcitation protection function

Measurement inputs	
Voltage input	U_{L1} , U_{L2} , U_{L3} U_{L12} , U_{L23} , U_{L31}
Voltage input magnitude	Maximum line-to-line voltage
Frequency reference 1	CT1IL1, CT2IL1, VT1U1, VT2U1
Frequency reference 2	CT1IL2, CT2IL2, VT1U2, VT2U2
Frequency reference 3	CT1IL3, CT2IL3, VT1U3, VT2U3
Pick-up	
Pick-up setting	0.01...75.00 %, setting step 0.01 %
Inaccuracy: - V/Hz	± 1.0 %
Operation time	
Definite time function operating time setting	0.00...1800.00 s, setting step 0.005 s

Inaccuracy: - Definite time (VHZ_M/VHZ_{SET} ratio 1.05)	$\pm 1.0\%$ or $\pm 25\text{ ms}$
Instant operation time	
Start time and instant operation time (trip): - VHZ_M/VHZ_{SET} ratio 1.05)	$< 40\text{ ms}$
Reset	
Reset ratio	97 % of the pick-up setting
Reset time setting Inaccuracy: Reset time	0.000...150.000 s, step 0.005 s $\pm 1.0\%$ or $\pm 25\text{ ms}$
Instant reset time and start-up reset	$< 40\text{ ms}$

2.6.3 Underexcitation protection ($Q < Q_{SET}$)

Table 2.24 Technical data for the underexcitation protection function

Measurement inputs	
Current inputs	Phase current inputs: I_{L1} (A), I_{L2} (B), I_{L3} (C)
Voltage inputs	U_{L1} , U_{L2} , U_{L3} U_{L12} , U_{L23} , U_{L31} + U_0
Calculated measurements	Three-phase reactive power
Pick-up	
Pick-up setting	-1 000 000.00...0.00 kVar, setting step 0.01 kVar
Inaccuracy: - Reactive power	Typically $< 1.0\% Q_{SET}$
Operation time	
Definite time function operating time setting	0.00...1800.00 s, setting step 0.005 s
Inaccuracy: - Definite time (Q_M/Q_{SET} ratio 1.05 $\rightarrow$)	$\pm 1.0\%$ or $\pm 35\text{ ms}$
Instant operation time	
Start time and instant operation time (trip): - Q_M/Q_{SET} ratio < 0.95	$< 50\text{ ms}$
Reset	
Reset ratio	97 % of the set pick-up value
Reset time setting Inaccuracy: Reset time	0.000...150.000 s, step 0.005 s $\pm 1.0\%$ or $\pm 35\text{ ms}$
Instant reset time and start-up reset	$< 50\text{ ms}$

NOTE Voltage measurement starts from 0.5 V and current measurement from 50 mA. If either or both are missing the reactive power measurement is 0 kVar.

2.6.4 100 % stator earth fault protection ($U_0 > U_{0SET}$)

Table 2.25 Technical data for the 100 % stator earth fault protection function

Measurement updates	
Current inputs	Phase current inputs: I_{L1} (A), I_{L2} (B), I_{L3} (C)
Current input calculation	Positive sequence current (I_1)

Voltage inputs	Residual voltage from U3 or U4 voltage channel
Voltage input magnitude	Zero sequence voltage third harmonic
Pick-up	
Pick-up voltage setting	1.00...95.00 %U _{0N} , setting step 0.01 %U _{0N}
Inaccuracy: - U ₀ 3rd harmonic	±1.0 %U _{0SET} or ±50 mV
Low-current blocking	
"No load" current setting	0.00...1.00 × I _N , setting step 0.01 × I _N
Inaccuracy: - Starting (I ₁)	±1.0 %I _{1SET} or ±100 mA (0.10...4.0 × I _N)
Operation time	
Definite time function operating time setting	0.00...1800.00 s, setting step 0.005 s
Inaccuracy: - Definite time (I _M /I _{SET} ratio 0.95)	±1.0 % or ±30 ms
Instant operation time	
Start time and instant operation time (trip): - U _M /U _{SET} ratio <0.95	<60 ms
Reset	
Reset ratio	103 % of the pick-up voltage setting
Reset time setting	0.010...150.000 s, step 0.005 s
Inaccuracy: Reset time	±1.0 % or ±30 ms
Instant reset time and start-up reset	<45 ms

NOTE "No load" current setting: The "No load" current setting value of 0.00 × I_N is only for commissioning purpose. When using the device under normal conditions always use the value 0.01 × I_N or greater.

2.7 Control functions

2.7.1 Synchrocheck ($\Delta V/\Delta a/\Delta f$; 25)

Table 2.26 Technical data for the synchrocheck function

Input signals	
Voltage inputs	U1, U2, U3 or U4 voltage channel
Voltage input magnitudes	RMS line-to-line or line-to-neutral voltages U3 or U4 voltage channel RMS
Pick-up	
U diff < setting	2.00...50.00 %U _N , setting step 0.01 %U _N
Angle diff < setting	3.0...90.0 deg, setting step 0.10 deg
Freq diff < setting	0.05...0.50 Hz, setting step 0.01 Hz
Inaccuracy: - Voltage - Frequency - Angle	±3.0 %U _{SET} or ±0.3 %U _N ±25 mHz (U > 30 V secondary) ±1.5° (U > 30 V secondary)
Reset	
Reset ratio:	

- Voltage	99 % of the pick-up voltage setting
- Frequency	20 mHz
- Angle	$\pm 2.0^\circ$
Activation time	
Activation (to LD/DL/DD)	<35 ms
Activation (to Live Live)	<60 ms
Reset	<40 ms
Bypass modes	
Voltage check mode (excluding LL)	LL+LD, LL+DL, LL+DD, LL+LD+DL, LL+LD+DD, LL+DL+DD, bypass
U live > limit	0.10...100.00 %U _N , setting step 0.01 %U _N
U dead < limit	0.00...100.00 %U _N , setting step 0.01 %U _N

NOTE The minimum voltage for direction and frequency solving is 20.0 %U_N.

2.7.2 Object control and monitoring

Table 2.27 Technical data for the object control and monitoring function

General	
Number of objects	5
Supported object types	Circuit breaker Circuit breaker with withdrawable cart Disconnecter (MC) Disconnecter (GND)
Signals	
Input signals	Digital inputs Software signals
Output signals	Close command output Open command output
Operation time	
Breaker traverse time setting	0.02...500.00 s, setting step 0.02 s
Max. close/open command pulse length	0.02...500.00 s, setting step 0.02 s
Control termination time out setting	0.02...500.00 s, setting step 0.02 s
Inaccuracy:	
- Definite time operating time	± 0.5 % or ± 10 ms
Breaker control operation time	
External object control time	<75 ms
Object control during auto-reclosing	See the technical sheet for the auto-reclosing function.

Table 2.28 Technical data for the circuit breaker wear monitoring function

Pick-up	
Breaker characteristics settings:	
- Nominal breaking current	0.00...100.00 kA, setting step 0.001 kA
- Maximum breaking current	0.00...100.00 kA, setting step 0.001 kA
- Operations with nominal current	0...200 000 operations, setting step 1 operation
- Operations with maximum breaking current	0...200 000 operations, setting step 1 operation
Pick-up setting for Alarm 1 and Alarm 2	0...200 000 operations, setting step 1 operation

Inaccuracy

Inaccuracy for current/operations counter:

- Current measurement element	$0.1 \times I_N > I < 2 \times I_N \pm 0.2 \%$ of the measured current, rest 0.5 %
- Operation counter	$\pm 0.5 \%$ of operations deducted

2.7.3 Programmable stage (PSx>/<; 99)

The programmable stage is a stage that the user can program to create more advanced applications, either as an individual stage or together with programmable logic. The device has ten programmable stages, and each can be set to follow one to three analog measurements. The programmable stages have three available pick up terms options: overX, underX and rate-of-change of the selected signal. Each stage includes a definite time delay to trip after a pick-up has been triggered.

The programmable stage cycle time is 5 ms. The pick-up delay depends on which analog signal is used as well as its refresh rate (typically under a cycle in a 50 Hz system).

2.7.4 Indicator object monitoring

Table 2.29 Technical data for the indicator object monitoring function

General	
Number of objects	5
Supported object types	Disconnecter (GND) Custom object image
Signals	
Input signals	Digital inputs Software signals

2.7.5 Setting group selection

Table 2.30 Technical data for the setting group selection function

Settings and control modes	
Setting groups	8 independent, control-prioritized setting groups
Control scale	Common for all installed functions which support setting groups
Control mode	
Local	Any binary signal available in the device
Remote	Force change overrule of local controls either from the setting tool, HMI or SCADA
Operation time	
Reaction time	<5 ms from receiving the control signal

2.8 Monitoring functions

2.8.1 Voltage transformer supervision (60)

Table 2.31 Technical data for the voltage transformer supervision function

Measurement inputs	
Voltage inputs	U_{L1}, U_{L2}, U_{L3} $U_{L12}, U_{L23}, U_{L31}$
Voltage input magnitudes	RMS line-to-line or line-to-neutral voltages

Pick-up	
Pick-up settings:	
- Voltage (low pick-up)	$0.05...0.50 \times U_N$, setting step $0.01 \times U_N$
- Voltage (high pick-up)	$0.50...1.10 \times U_N$, setting step $0.01 \times U_N$
- Angle shift limit	$2.00...90.00$ deg, setting step 0.10 deg
Inaccuracy:	
- Voltage	$\pm 1.5 \% U_{SET}$
- U angle ($U > 1$ V)	$\pm 1.5^\circ$
External line/bus side pick-up (optional)	$0 \rightarrow 1$
Time delay for alarm	
Definite time function operating time setting	$0.00...1800.00$ s, setting step 0.005 s
Inaccuracy:	
- Definite time (U_M/U_{SET} ratio $> 1.05/0.95$)	$\pm 1.0 \%$ or ± 35 ms
Instant operation time (alarm):	
- U_M/U_{SET} ratio $> 1.05/0.95$	< 80 ms
VTB MCB trip bus/line (external input)	< 50 ms
Reset	
Reset ratio	$97/103 \%$ of the pick-up voltage setting
Reset time setting	$0.010...10.000$ s, step 0.005 s
Inaccuracy: Reset time	$\pm 2.0 \%$ or ± 80 ms
Instant reset time and start-up reset	< 50 ms
VTB MCB trip bus/line (external input)	< 50 ms

NOTE When turning on the auxiliary power of a device, the normal condition of a stage has to be fulfilled before tripping.

2.8.2 Circuit breaker wear monitoring

Table 2.32 Technical data for the circuit breaker wear monitoring function

Pick-up	
Breaker characteristics settings:	
- Nominal breaking current	$0.00...100.00$ kA, setting step 0.001 kA
- Maximum breaking current	$0.00...100.00$ kA, setting step 0.001 kA
- Operations with nominal current	$0...200\ 000$ operations, setting step 1 operation
- Operations with maximum breaking current	$0...200\ 000$ operations, setting step 1 operation
Pick-up setting for Alarm 1 and Alarm 2	$0...200\ 000$ operations, setting step 1 operation
Inaccuracy	
Inaccuracy for current/operations counter:	
- Current measurement element	$0.1 \times I_N > I < 2 \times I_N \pm 0.2 \%$ of the measured current, rest 0.5%
- Operation counter	$\pm 0.5 \%$ of operations deducted

2.8.3 Disturbance recorder

Table 2.33 Technical data for the disturbance recorder function

Recorded values	
Recorder analog channels	$0...20$ channels Freely selectable

Recorder digital channels	0...95 channels Freely selectable analog and binary signals 5 ms sample rate (FFT)
Performance	
Sample rate	8, 16, 32 or 64 samples/cycle
Recording length	0.000...1800.000 s, setting step 0.001 s The maximum length is determined by the chosen signals.
Number of recordings	0...100, 60 MB of shared flash memory reserved The maximum number of recordings according to the chosen signals and operation time setting combined

2.8.4 Current transformer supervision

Table 2.34 Technical data for the current transformer supervision function

Measurement inputs	
Current inputs	Phase current inputs: I_{L1} (A), I_{L2} (B), I_{L3} (C) Residual current channel I_{01} (Coarse) Residual current channel I_{02} (Fine)
Current input magnitudes	RMS phase currents RMS residual current (I_{01} , I_{02})
Pick-up	
Pick-up current settings:	
- I_{SET} high limit	$0.10...40.00 \times I_N$, setting step $0.01 \times I_N$
- I_{SET} low limit	$0.10...40.00 \times I_N$, setting step $0.01 \times I_N$
- I_{SUM} difference	$0.10...40.00 \times I_N$, setting step $0.01 \times I_N$
- I_{SET} ratio	$0.01...100.00 \%$, setting step 0.01%
- I_2/I_1 ratio	$0.01...100.00 \%$, setting step 0.01%
Inaccuracy:	
- Starting I_{L1} , I_{L2} , I_{L3}	$\pm 0.5 \% I_{SET}$ or $\pm 15 \text{ mA}$ ($0.10...4.0 \times I_{SET}$)
- Starting I_2/I_1	$\pm 1.0 \% I_{2SET} / I_{1SET}$ or $\pm 100 \text{ mA}$ ($0.10...4.0 \times I_N$)
- Starting I_{01} (1 A)	$\pm 0.5 \% I_{0SET}$ or $\pm 3 \text{ mA}$ ($0.005...10.0 \times I_{SET}$)
- Starting I_{02} (0.2 A)	$\pm 1.5 \% I_{0SET}$ or $\pm 1.0 \text{ mA}$ ($0.005...25.0 \times I_{SET}$)
Time delay for alarm	
Definite time function operating time setting	$0.00...1800.00 \text{ s}$, setting step 0.005 s
Inaccuracy_	
- Definite time (I_M/I_{SET} ratio > 1.05)	$\pm 2.0 \%$ or $\pm 80 \text{ ms}$
Instant operation time (alarm):	
- I_M/I_{SET} ratio > 1.05	$< 80 \text{ ms}$ ($< 50 \text{ ms}$ in differential protection relays)
Reset	
Reset ratio	$97/103 \%$ of the pick-up current setting
Instant reset time and start-up reset	$< 80 \text{ ms}$ ($< 50 \text{ ms}$ in differential protection relays)

2.8.5 Current total harmonic distortion

Table 2.35 Technical data for the total harmonic distortion function

Input signals	
Current inputs	Phase current inputs: I_{L1} (A), I_{L2} (B), I_{L3} (C) Residual current channel I_{01} (Coarse)

	Residual current channel I_{02} (Fine)
Current input magnitudes	Current measurement channels (FFT result) up to the 31 st harmonic component.
Pick-up	
Operating modes	Power THD Amplitude THD
Pick-up setting for all comparators	0.10...200.00 % , setting step 0.01 %
Inaccuracy	± 3 % of the set pick-up value $> 0.5 \times I_N$ setting; $5 \text{ mA} < 0.5 \times I_N$ setting.
Time delay	
Definite time function operating time setting for all timers	0.00...1800.00 s, setting step 0.005 s
Inaccuracy: - Definite time operating time - Instant operating time, when I_M/I_{SET} ratio > 3 - Instant operating time, when I_M/I_{SET} ratio $1.05 < I_M/I_{SET} < 3$	± 0.5 % or ± 10 ms Typically < 20 ms Typically < 25 ms
Reset	
Reset time	Typically < 10 ms
Reset ratio	97 %

2.8.6 Voltage memory

Table 2.36 Technical data for the voltage memory function

Measurement inputs	
Voltage inputs	U_{L1}, U_{L2}, U_{L3} $U_{L12}, U_{L23}, U_{L31} + U_0$
Current inputs (back-up frequency)	Phase current inputs: I_{L1} (A), I_{L2} (B), I_{L3} (C)
Pick-up	
Pick-up voltage setting	2.00...50.00 % U_N , setting step $0.01 \times \%U_N$
Pick-up current setting (optional)	$0.01...50.00 \times I_N$, setting step $0.01 \times I_N$
Inaccuracy: - Voltage - Current	$\pm 1.5 \%U_{SET}$ or $\pm 30 \text{ mV}$ $\pm 0.5 \%I_{SET}$ or $\pm 15 \text{ mA}$ ($0.10...4.0 \times I_{SET}$)
Operation time	
Angle memory activation delay	< 20 ms (typically 5 ms)
Maximum active time	0.020...50.000 s, setting step 0.005 s
Inaccuracy: - Definite time (U_M/U_{SET} ratio > 1.05)	± 1.0 % or ± 35 ms
Angle memory	
Angle drift while voltage is absent	$\pm 1.0^\circ$ per 1 second
Reset	
Reset ratio: - Voltage memory (voltage) - Voltage memory (current)	103 % of the pick-up voltage setting 97 % of the pick-up current setting
Reset time	< 50 ms

NOTE Voltage memory is activated only when all line voltages fall below set pick-up value.

NOTE Voltage memory activation captures healthy situation voltage angles, one cycle before actual activation (50Hz/20ms before “bolted” fault)

3. Technical specifications

3.1 Electromagnetic compatibility

Emission	Standard	Class	Value
Conducted Disturbance Emission	IEC 60255-26	A	0.15 to 30 MHz IACS E10 Setup according to CISPR 16. Conducted emission measured from 10kHz
	IEC 61000-6-4	A	
Radiated emission (below 1 GHz)	IEC 60255-26		30 to 1000 MHz
	IEC 61000-6-4	A	IACS E10 Setup according to CISPR 16. Radiated emission measured from 150 kHz to 2000 MHz
Radiated emission (above 1 GHz)	IEC 60255-26		1 to 6 GHz
	IEC 61000-6-4	A	

Immunity	Standard	Level	Value
Electrostatic Discharge	IEC 60255-26		8 kV air discharge
	IEC 61000-4-2 IACS E10	3	6 kV direct discharge
Radiated immunity	IEC 60255-26		10 V/m; 80 MHz to 1 GHz; 1.4 GHz to 2.7 GHz IACS E10 80 MHz to 2 GHz 10 V/m 3 s dwell time
	ENV 50204 (GSM)	3	10 V/m; 2 W at 0.6 m
Fast transient/burst immunity	IEC 60225-26		2 kV
	IEC 61000-4-4 IACS E10	3	2 kV 2 kV
Surge immunity	IEC 60255-26		1 kV symmetrical (line to line)
	IEC 61000-4-5 IACS E10	3	2 kV unsymmetrical (line to earth) 0.5 kV symmetrical (line to line) (only for IACS E10) 1 kV unsymmetrical (line to earth) (only for IACS E10)
Conducted immunity	IEC 60255-26		0.15 to 80 MHz; 10 V
	IEC 61000-4-6	3	IACS E10 3 s dwell time.
Power frequency magnetic field immunity	IEC 60255-26		30 A/m continuous
	IEC 61000-4-8	4	300 A/m; 1 s to 3 s
Pulse magnetic field immunity	IEC 61000-4-9	5	1000 A/m
Damped oscillatory magnetic field immunity	IEC 61000-4-10	4	30 A/m
Oscillatory transient immunity – Ring wave	IEC 61000-4-12	4	100 kHz 4 kV common mode
			2 kV differential mode
Oscillatory transient immunity – Slow damped oscillatory wave	IEC 61000-4-18 ANSI/IEEE Std C37.90.1	3	100 kHz 1 kV differential mode 2.5 kV common mode
Oscillatory transient immunity – Slow damped oscillatory wave	IEC 60255-26 IEC 61000-4-18	3	1.0 MHz 2.5 kV common mode
	ANSI/IEEE Std C37.90.1		2.5 kV differential mode

Immunity	Standard	Level	Value
Voltage dips	IEC 60255-26		0 %
	IEC 61000-4-11		DC 10 ms
	IEC 61000-4-29		AC 0.5 cycle (10 ms)
Voltage dips	IEC 60255-26		40 %
	IEC 61000-4-11		DC 200 ms
	IEC 61000-4-29		AC 10/12 cycles (10 ms) Tested both 50/60 Hz
Voltage dips	IEC 60255-26		70 %
	IEC 61000-4-11		DC 500 ms
	IEC 61000-4-29		AC 25/30 cycles (10 ms)
Voltage interruptions	IEC 60255-26		0 %
	IEC 61000-4-11 IACS E10		DC 5 s (3 interruptions w. 10 s interval) DC 30 s/60 s (3 interruptions w. 60 s interval)
	IEC 61000-4-29 IACS E10		AC 250 cycles (5 s) (3 interruptions w. 10 s interval) AC 30 s (3 interruptions w. 90 s interval) 1 additional interruption during booting
Voltage variations permanent	IACS E10		DC +30 % 24H DC -15 % 15 min AC +6 % V AC/+5 % Hz 15 min AC +6 % V AC/-5 % Hz 15 min AC -10 % V AC/-5 % Hz 15min AC -10 % V AC/+5 % Hz 15 min
Voltage variations transient	IACS E10		AC +20 % V AC 1.5 s/+10 % Hz 5 s AC -20 % V AC 1.5 s/-10 % Hz 5 s
Ripple	IEC 60255-26		15 % of DC; 100 Hz
	IEC 61000-4-17		
Power Frequency Immunity	IEC 60255-26		150 V, 50 Hz, common mode
	IEC 61000-4-16		300 V, 50 Hz, differential mode

3.2 Mechanical durability

Energised	Standard	Class	Value
Vibration response	IEC 60255-27 IEC 60255-21-1	2	10 to 58.1 Hz: 0.15 mmpp 58.1 to 150 Hz: 1 g 1 cycle in each axis
Vibration	IACS E10		3 to 13.2 Hz 2 mmpp 13.2 to 100 Hz 0.7 g
Shock response	IEC 60255-27 IEC 60255-21-2	2	10 g; 11 ms

De-energised	Standard	Class	Value
Vibration endurance	IEC 60255-27 IEC 60255-21-1	2	10 to 150 Hz; 2 g acceleration; 20 sweep cycles
Shock withstand	IEC 60255-27	2	30 g; 11 ms

De-energised	Standard	Class	Value
	IEC 60255-21-2		
Bump	IEC 60255-27 IEC 60255-21-2	2	20 g; 16 ms

3.3 Environment

General	Standard	Value
Cold non-operation	I IEC 60255-27 IEC 60255-1 IACS E10	-25 °C; 16 h
Dry heat operation	IEC 60255-27 IEC 60255-1 IACS E10	60 °C; 16 h
Damp heat (static)	IEC 60255-27 IEC 60255-1	55 °C; 93 % RH; 10 days
Cyclic temperature with humidity (damp heat cyclic)	IEC 60255-27 IEC 60255-1 IACS E10	55 °C @ 93 % RH; 25 °C @ 97 % RH, 12 h + 12 h; 6 cycles 55 °C @ 95 % RH; 12 h + 12 h; 2 cycles
Change of temperature	IEC 60255-1	5 cycles; -25 °C to 70 °C

Storage	Standard	Value
Low temperature storage	IEC 60255-27 IEC 60255-1	-40 °C; 16 h
High temperature storage	IEC 60255-27 IEC 60255-1	70 °C; 16 h

3.4 Safety

Electrical	Standard	Value
Insulation resistance	IEC 60255-27 IACS E10	Before environmental tests: >100 MΩ at DC 500 V >100 MΩ at DC 500 V (Uw >65 V) >10 MΩ at DC 50 V (Uw <65 V) After environmental tests: >10 MΩ at DC 500 V (Uw >65 V) >1 MΩ at DC 50 V (Uw <65 V)
Reverse polarity	IEC 60255-27	
Gradual shut down/start-up tests	IEC 60255-27	
Impulse voltage	IEC 60255-27	5 kV; 1.2/50 μs; 0.5 J
Power frequency dielectric withstand	IEC 60255-27	3.5 kV; 50 Hz; 1 min (PS, DI, DO, I, RS485 AO) 4.35 kV; 50 Hz; 1 min (U)
Protective bonding impedance	IEC 60255-27	<0.1 Ω at 20 A 60 s
Insulation class		Class I
Over-voltage CAT	IEC 60255-27	III

Enclosure	Standard	Value
Dust/water ingress	IEC 60255-27 IEC 60529	IP 54 (front), IP 20 (back)

4. Hardware

4.1 Processor and power supply

Table 4.1 General information for the CPU module

Terminal block connection	
Screw connection terminal block (standard)	Phoenix Contact MSTB 2,5/5-ST-5,08
Spring cage terminal block (option)	Phoenix Contact FKC 2,5/20-STF-5,08
Solid or stranded wire	
Nominal cross section	2.5 mm ²
RS-485 serial terminal block connection	
Screw connection terminal block (standard)	Phoenix Contact MC 1,5/ 5-ST-3,81
Spring cage terminal block (option)	Phoenix Contact FK-MCP 1,5/ 5-ST-3,81
Solid or stranded wire	
Nominal cross section	1.5 mm ²

4.1.1 Auxiliary supply

Table 4.2 Power supply model H

Rated values	
Rated auxiliary voltage	100...120 V DC
Power consumption	< 7 W (no option cards) < 15 W (maximum number of option cards)
Maximum permitted interrupt time	< 60 ms with 110 VDC
DC ripple	< 15 %
Other	
Minimum recommended fuse rating	MCB C2

Table 4.3 Power supply model L

Rated values	
Rated auxiliary voltage	24...48 VDC
Power consumption	< 7 W (no option cards) < 15 W (maximum number of option cards)
Maximum permitted interrupt time	< 90 ms with 24 VDC
DC ripple	< 15 %
Other	
Minimum recommended fuse rating	MCB C2

4.1.2 Isolated digital inputs

Table 4.4 CPU model-isolated digital inputs, with thresholds defined by order code

Number of digital inputs	3
Rated values	
Rated auxiliary voltage	265 V (AC/DC)
Nominal voltage	Order code defined: 24, 110, 220 V (AC/DC) Caution: When the working voltage is above 150 V AC, do not mix AC and DC voltage inside any relay groups or digital input groups.
Pick-up threshold	Order code defined: 19, 90, 170 V
Release threshold	Order code defined: 14, 65, 132 V
Scanning rate	5 ms
Settings	
Pick-up delay	Software settable: 0...1800 s
Polarity	Software settable: Normally On/Normally Off
Current drain	2 mA

4.1.3 Digital outputs

Table 4.5 Digital outputs (Normally Open)

Number of digital outputs	4
Rated values	
Rated auxiliary voltage	265 V (AC/DC) Caution: When the working voltage is above 150 V AC, do not mix AC and DC voltage inside any relay groups or digital input groups.
Continuous carry	5 A
Make and carry 0.5 s	30 A
Make and carry 3 s	15 A
Breaking capacity, DC (L/R = 40 ms)	
at 48 VDC	1 A
at 110 VDC	0.4 A
at 220 VDC	0.2 A
Control rate	5 ms
Settings	
Polarity	Software settable: Normally Open / Normally Closed

Table 4.6 Digital outputs (Change-Over)

Number of digital outputs	1 configurable (plus 1 for fault signaling)
Rated values	
Rated auxiliary voltage	265 V (AC/DC) Caution: When the working voltage is above 150 V AC, do not mix AC and DC voltage inside any relay groups or digital input groups.
Continuous carry	2.5 A
Make and carry 0.5 s	30 A
Make and carry 3 s	15 A

Breaking capacity, DC (L/R = 40 ms)	
at 48 VDC	1 A
at 110 VDC	0.3 A
at 220 VDC	0.15 A
Control rate	5 ms
Settings	
Polarity	Software settable: Normally Open / Normally Closed

4.1.4 Communication ports

Front panel local communication port	
Port, media	Ethernet RJ-45, Copper
Number of ports	1
Port protocols	PC-protocols, FTP, Telnet
Data transfer rate	100 MB
System integration	Cannot be used for system protocols, only for local programming
Rear panel system communication port A	
Port, media	Ethernet RJ-45, Copper
Number of ports	1
Port protocols	Modbus TCP, DNP 3.0, FTP, Telnet, IEC 61850, IEC-104
Data transfer rate	100 MB
System integration	Can be used for system protocols and for local programming
Rear panel system communication port B	
Port, media	RS-485, Copper
Number of ports	1
Port protocols	Modbus RTU, DNP 3.0, IEC-103, IEC-101, SPA
Data transfer rate	65580 kB/s
System integration	Can be used for system protocols

4.2 Current measurement module

Table 4.7 Technical data for the current measurement module

Connections	
Measurement channels/CT inputs	Three phase current inputs: IL1 (A), IL2 (B), IL3 (C) Two residual current inputs: Coarse residual current input I01, Fine residual current input I02
Phase current inputs (A, B, C)	
Sample rate	64 samples per cycle in frequency range 6...75Hz
Rated current I_N	5 A (configurable 0.2...10 A) 5 A (configurable 0.2...20 A)
Thermal withstand	20 A (continuous) 100 A (for 10 s) 500 A (for 1 s) 1250 A (for 0.01 s)
Frequency measurement range	From 6...75Hz fundamental, up to the 31 st harmonic current

Current measurement range	25 mA...250 A (RMS)
Current measurement inaccuracy	0.005...4.000 × I _N < ±0.5 % or < ±15 mA 4...20 × I _N < ±0.5 % 20...50 × I _N < ±1.0 %
Temperature-dependent current measurement inaccuracy	Reference temperature: 25 °C Operation temperature range: -25 to 55 °C Inaccuracy: An additional ±15 mA per 10 °C
Angle measurement inaccuracy	< ±0.2° (I > 0.1 A) < ±1.0° (I ≤ 0.1 A)
Burden (50/60 Hz)	<0.1 VA
Transient overreach	<8 %
Coarse residual current input (I01)	
Rated current I _N	1 A (configurable 0.1...10 A)
Thermal withstand	25 A (continuous) 100 A (for 10 s) 500 A (for 1 s) 1250 A (for 0.01 s)
Frequency measurement range	From 6...75 Hz fundamental, up to the 31 st harmonic current
Current measurement range	5 mA...150 A (RMS)
Current measurement inaccuracy	0.002...10.000 × I _N < ±0.5 % or < ±3 mA 10...150 × I _N < ±0.5 %
Temperature-dependent current measurement inaccuracy	Reference temperature: 25 °C Operation temperature range: -25 to 55 °C Inaccuracy: An additional ±0.8 mA per 10 °C
Angle measurement inaccuracy	< ±0.2° (I > 0.05 A) < ±1.0° (I ≤ 0.05 A)
Burden (50/60Hz)	<0.1 VA
Transient overreach	<5 %
Fine residual current input (I02)	
Rated current I _N	0.2 A (configurable 0.001...10 A)
Thermal withstand	25 A (continuous) 100 A (for 10 s) 500 A (for 1 s) 1250 A (for 0.01 s)
Frequency measurement range	From 6...75 Hz fundamental, up to the 31 st harmonic current
Current measurement range	1 mA...75 A (RMS)
Current measurement inaccuracy	0.002...25.000 × I _N < ±0.5 % or < ±0.6 mA 25...375 × I _N < ±1.0 %
Temperature-dependent current measurement inaccuracy	Reference temperature: 25 °C Operation temperature range: -25 to 55 °C Inaccuracy: An additional ±0.4 mA per 10 °C
Angle measurement inaccuracy	< ±0.2° (I > 0.01 A) < ±1.0° (I ≤ 0.01 A)
Burden (50/60Hz)	<0.1 VA
Transient overreach	<5 %
Screw connection terminal block (standard)	
Terminal block	Phoenix Contact FRONT 4-H-6,35
Solid or stranded wire	

Nominal cross section	4 mm ²
Ring lug terminal block connection (option)	
Ring terminal dimensions	Max 8mm diameter, with minimum 3,5mm screw hole

NOTE Current measurement accuracy has been verified with 50/60 Hz.

The amplitude difference is 0.2 % and the angle difference is 0.5 degrees higher at 16.67 Hz and other frequencies.

4.3 Voltage measurement module

Table 4.8 Technical data for the voltage measurement module

General information	
Compatibility	MVR-200 series and MVR-250 series models
Connection	
Measurement channels/VT inputs	4 independent VT inputs (U1, U2, U3 and U4)
Measurement	
Sample rate	64 samples per cycle in frequency range 6...75Hz
Voltage measuring range	0.50...480.00 V (RMS)
Voltage measurement inaccuracy	For 2...480 V AC: $\pm 0.2 \%$ or ± 10 mV, whichever is biggest
Temperature-dependent voltage measurement inaccuracy	Reference temperature: 25 °C Operation temperature range: -25 to 60 °C Inaccuracy: An additional ± 30 mV per 10 °C
Angle measurement inaccuracy	± 0.2 degrees (15...300 V) ± 1.5 degrees (1...15 V)
Voltage measurement bandwidth (freq.)	7...75 Hz fundamental, up to the 31 st harmonic voltage
Terminal block connection	
Screw connection terminal block (standard)	Phoenix Contact PC 5/ 8-STCL1-7,62
Spring cage terminal block (optional)	Phoenix Contact SPC 5/ 8-STCL-7,82
Solid or stranded wire	
Nominal cross section	6 mm ²
Input impedance	$\sim 24.5 \text{ M}\Omega$
Burden (50/60 Hz)	<0.02 VA
Thermal withstand	630 V _{RMS} (continuous)

NOTE Voltage measurement accuracy has been verified with 50/60 Hz.

The amplitude difference is 0.2 % and the angle difference is 0.5 degrees higher at 16.67 Hz and other frequencies.

4.4 Power and energy measurement

Table 4.9 Power and energy measurement accuracy

Power measurement P, Q, S	Frequency range 6...75 Hz
Inaccuracy	0.3 % $< 1.2 \times I_N$ or 3 VA secondary 1.0 % $> 1.2 \times I_N$ or 3 VA secondary
Energy measurement	Frequency range 6...75 Hz

Energy and power metering inaccuracy	0.5% down to 1A RMS (50/60Hz) as standard 0.2% down to 1A RMS (50/60Hz) option available (see the order code for details)
Temperature-dependent power measurement inaccuracy	Reference temperature: 25 °C Operation temperature range: -25 to 60 °C Inaccuracy (UL 100V, IL 5A): An additional ± 1.5 W per 10 °C

4.5 Frequency measurement

Table 4.10 Frequency measurement accuracy.

Frequency measurement performance	
Frequency measuring range	6...75 Hz fundamental, up to the 31st harmonic current or voltage
Inaccuracy	20 mHz*

NOTE If one of these conditions is met, the frequency inaccuracy is ± 30 mHz:

- $f \neq 50$ Hz or 60 Hz.
- Frequency tracking via voltages is applied.
- $U < 15$ V.

4.6 Digital inputs and outputs

4.6.1 Digital input module (option card B)

Table 4.11 Technical data for the digital input module

Number of digital inputs	8 x isolated (2 groups)
Rated values	
Rated auxiliary voltage	5...265 V (AC/DC)
Current drain	2 mA
Scanning rate	5 ms
Activation/release delay	5...11 ms
Settings	
Pick-up threshold	Software settable: 16...200 V, setting step 1 V
Release threshold	Software settable: 10...200 V, setting step 1 V
Pick-up delay	Software settable: 0...1800 s
Drop-off delay	Software settable: 0...1800 s
Polarity	Software settable: Normally On/Normally Off
Terminal block connection	
Screw connection terminal block (standard)	Phoenix Contact MSTB 2,5/10-ST-5,08
Spring cage terminals block (option)	Phoenix Contact FKC 2,5/10-STF-5,08
Solid or stranded wire	
Nominal cross section	2.5 mm ²

4.6.2 Digital output module (option card C)

Table 4.12 Technical data for the digital output module

Number of digital outputs	5
Rated values	
Rated auxiliary voltage	265 V (AC/DC)
Continuous carry	5 A
Make and carry 0.5 s	30 A
Make and carry 3 s	15 A
Breaking capacity, DC (L/R = 40 ms)	
at 48 VDC	1 A
at 110 VDC	0.4 A
at 220 VDC	0.2 A
Control rate	5 ms
Settings	
Polarity	Software settable: Normally On/Normally Off
Terminal block connection	
Screw connection terminal block (standard)	Phoenix Contact MSTB 2,5/10-ST-5,08
Spring cage terminals block (option)	Phoenix Contact FKC 2,5/10-STF-5,08
Solid or stranded wire	
Nominal cross section	2.5 mm ²

4.7 Analogue outputs

4.7.1 Analogue output module (mA out & mA in) (option card I)

Table 4.13 Technical data for the analogue output module

Signals	
Output magnitudes	4 × mA output signal (DC)
Input magnitudes	1 × mA input signal (DC)
mA input	
Range (hardware)	0...33 mA
Range (measurement)	0...24 mA
Inaccuracy	±0.1 mA
Update cycle	5...10 000 ms, setting step 5 ms
Response time @ 5 ms cycle	~ 15 ms (13...18 ms)
Update cycle time inaccuracy	Max. +20 ms above the set cycle
mA input scaling range	0...4000 mA
Output scaling range	-1 000 000.0000...1 000 000.0000, setting step 0.0001
mA output	
Inaccuracy @ 0...24 mA	±0.01 mA
Response time @ 5 ms cycle [fixed]	< 5 ms
mA output scaling range	0...24 mA, setting step 0.001 mA
Source signal scaling range	-1 000 000.000...1 000 000.0000, setting step 0.0001
Terminal block connection	
Screw connection terminal block (standard)	Phoenix Contact MSTB 2,5/10-ST-5,08

Spring cage terminals block (option)	Phoenix Contact FK 2,5/10-STF-5,08
Solid or stranded wire	
Nominal cross section	2.5 mm ²

4.8 Additional communication options

4.8.1 Double ST 100 Mbps Ethernet communication module (option card H)

Table 4.14 Technical data for the double ST 100 Mbps Ethernet communication module

General information	
Dimensions	74 mm X 179 mm
Ports	ST connectors (2) and IRIG-B connector (1)
Protocols	
Protocols	IEC61850, DNP/TCP, Modbus/TCP, IEC104 & FTP
ST connectors	
Connector type	Duplex ST connectors 62.5/125 µm or 50/125 µm multimode fiber 100BASE-FX
Transmitter wavelength	1260...1360 nm (nominal: 1310 nm)
Receiver wavelength	1100...1600 nm
Maximum distance	2 km
IRIG-B Connector	
Screw connection terminal block	Phoenix Contact MC 1,5/ 2-ST-3,5 BD:1-2
Solid or stranded wire	
Nominal cross section	1.5 mm ²

4.8.2 Double LC 100 Mbps Ethernet communication module (option card J)

Table 4.15 Technical data for the double LC 100 Mbps Ethernet communication module

Protocols	
Protocols	HSR and PRP
Ports	
Quantity of fiber ports	2
Communication port C & D	LC fiber connector Wavelength 1300 nm
Fiber cable	50/125 µm or 62.5/125 µm multimode (glass)

4.8.3 RS-232 & serial fiber communication module (option cards L to O)

Table 4.16 Technical data for the RS-232 & serial fiber communication module.

Ports	
RS-232	
Serial fiber (GG/PP/GP/PG)	
Serial port wavelength	

660 nm	
Cable type	
1 mm plastic fiber	
Terminal block connections	
Spring cage terminals block	Phoenix Contact DFMC 1,5/ 6-STF-3,5
Solid or stranded wire	
Nominal cross section	1.5 mm ²

4.9 Arc protection module (option card D)

Table 4.17 Technical data for the point sensor arc protection module

Connections	
Input arc point sensor channels	S1, S2, S3, S4 (pressure and light, or light only)
Sensors per channel	3
Maximum cable length	200 m
Performance	
Pick-up light intensity	8, 25 or 50 kLx (the sensor is selectable in the order code)
Point sensor detection radius	180 degrees
Start and instant operating time (light only)	Typically <5 ms with dedicated semiconductor outputs (HSO) Typically <10 ms regular output relays

Table 4.18 High-Speed Outputs (HSO1...2)

Rated values	
Rated auxiliary voltage	250 VDC
Continuous carry	2 A
Make and carry 0.5 s	15 A
Make and carry 3 s	6 A
Breaking capacity, DC (L/R = 40 ms)	1 A/110 W
Control rate	5 ms
Operation delay	<1 ms
Polarity	Normally Off
Contact material	Semiconductor

Table 4.19 Binary input channel

Rated values	
Voltage withstand	265 VDC
Nominal voltage	24 VDC
Pick-up threshold	≥16 VDC
Release threshold	≤15 VDC
Scanning rate	5 ms
Polarity	Normally Off
Current drain	3 mA

Table 4.20 Terminal block connections

Arc point sensor terminal block connections	
Spring cage terminal block	Phoenix Contact DFMC 1,5/ 6-STF-3,5
Solid or stranded wire	
Nominal cross section	1.5 mm ²
Binary input and HSO terminal block connections	
Screw connection terminal block (standard)	Phoenix Contact MSTB 2,5/5-ST-5,08
Spring cage terminals block (option)	Phoenix Contact FKC 2,5/10-STF-5,08
Solid or stranded wire	
Nominal cross section	2.5 mm ²

NOTE The polarity must be correct!

4.10 MVR-21x display


4.10.1 Display

Table 4.21 Technical data for the HMI LCD display

Dimensions and resolution	
Number of dots/resolution	320 x 160
Size	84.78 × 49.90 mm (3.34 × 1.96 in)
Display	
Type of display	LCD
Color	Monochrome

4.11 Folios and configuration

MVR-21x folio

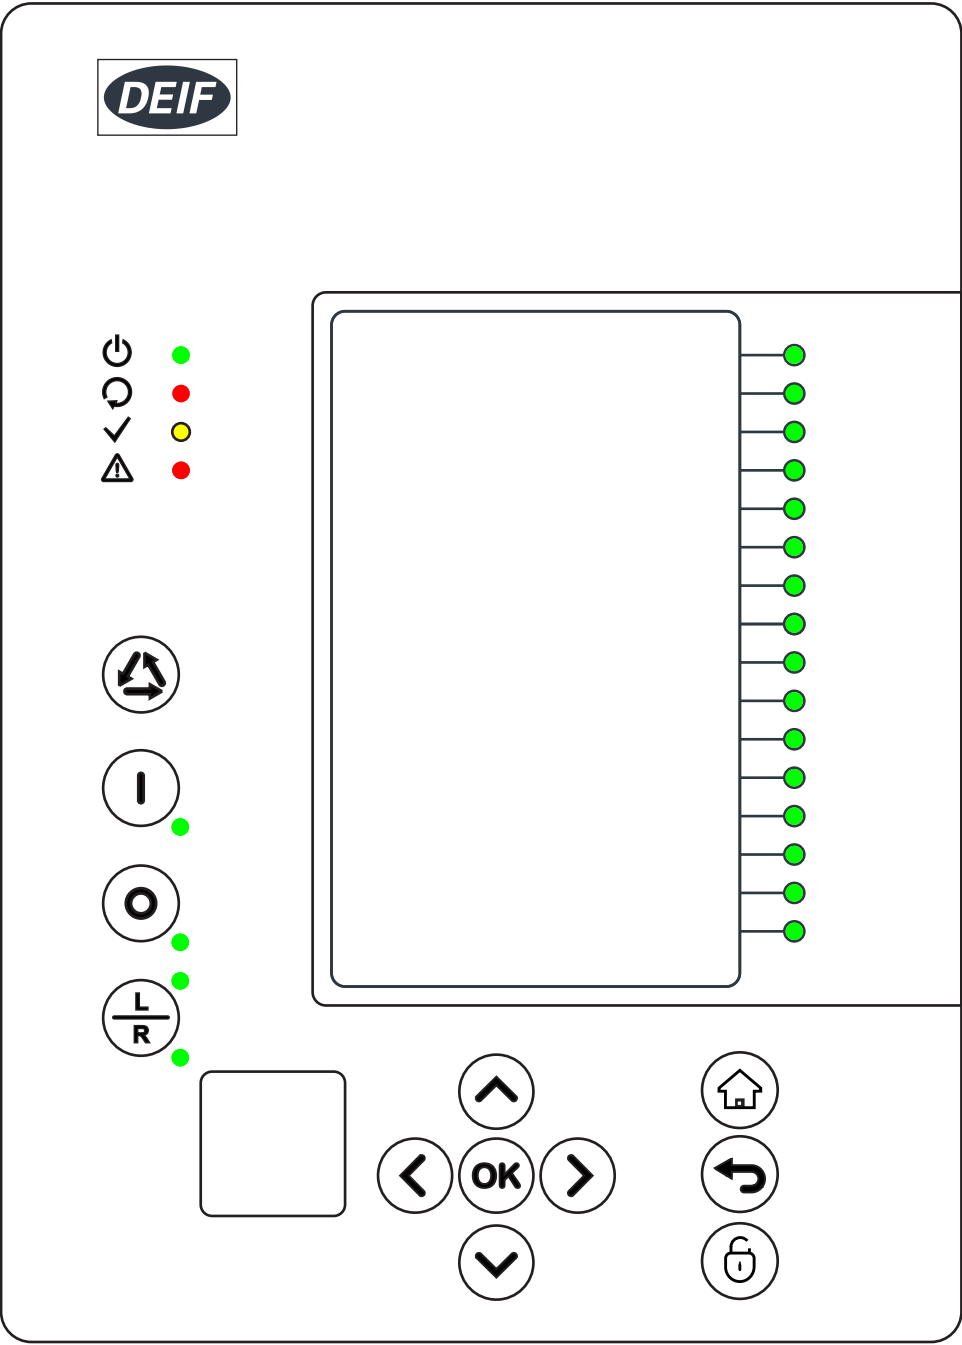

To meet marine class society requirements:

- The MVR must be configured so that the **Trip LED** ( ) is lit whenever a protection activates a breaker trip.
- For each trip protection, select *Trip ON* in the NOC EventMask. In this way, the cause of any trip is shown on the main screen and immediately visible to the operator.

4.12 Mechanical specifications

Device dimensions	210 series casing height	¼ rack 4U, depth 210 mm
Package dimensions (W x H x D)	210 series	230 x 120 x 210 mm
Weight	Device	1.5 kg
	In package	2.0 kg

Material	Housing	Metal
IP protection level	Front	IP54
	Rear	IP20
Tightening torque - M4 nuts	Front	1.3 N·m for 210 series

4.13 Environment

IEC 60255-27 degree of pollution	2
Maximum altitude above sea level	2000 m (6561.68 ft)
Operation temperature range	-25 °C to +60 °C

4.14 Safety

Wiring specification


Wiring must be multi-stranded, minimum 90 °C copper conductors only.

Galvanic isolation

- Ethernet: 550 V, 50 Hz, 1 minute
- COM ports: 550 V, 50 Hz, 1 minute
- Between Option I (mA I/O) and other I/O ports: 550 V, 50 Hz, 1 minute
- Between CT and other I/O ports: 2200 V, 50 Hz, 1 minute
- Between Relay and other I/O ports: 2200 V, 50 Hz, 1 minute
- Between DI and other I/O ports: 2200 V, 50 Hz, 1 minute
- Between PSU and other I/O ports: 2200 V, 50 Hz, 1 minute

4.15 Dimensions

MVR-210 dimensions


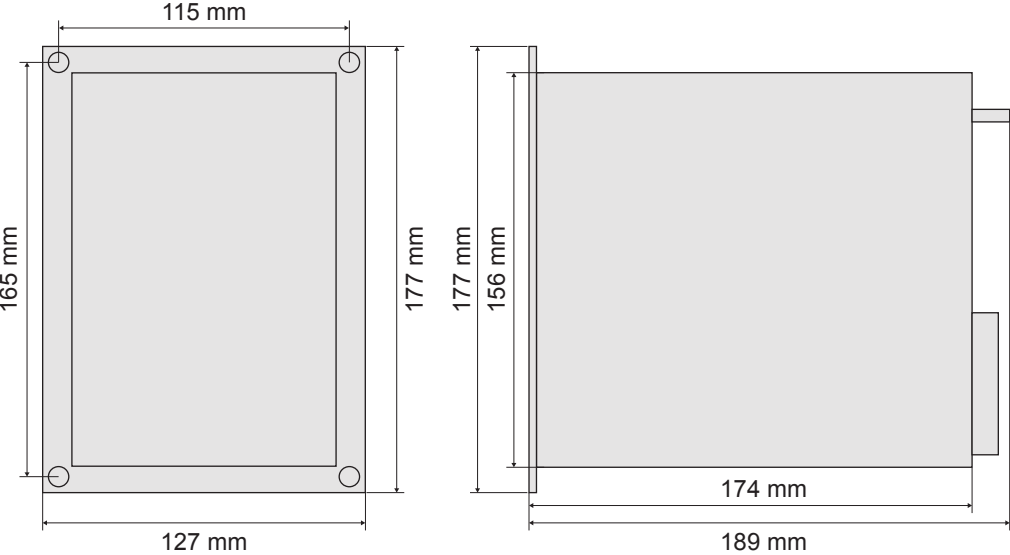


5. Ordering information

5.1 MVR Ordering

The drawings show the rear view of the MVR without hardware options.

MVR Generator relay MVR-G215

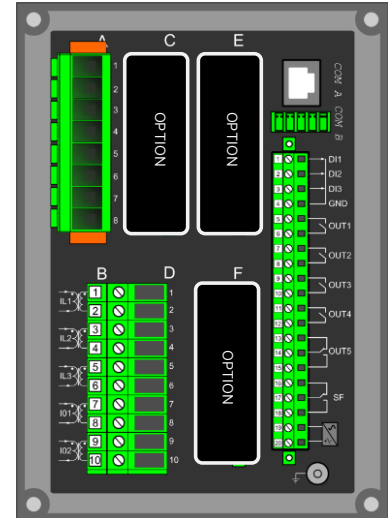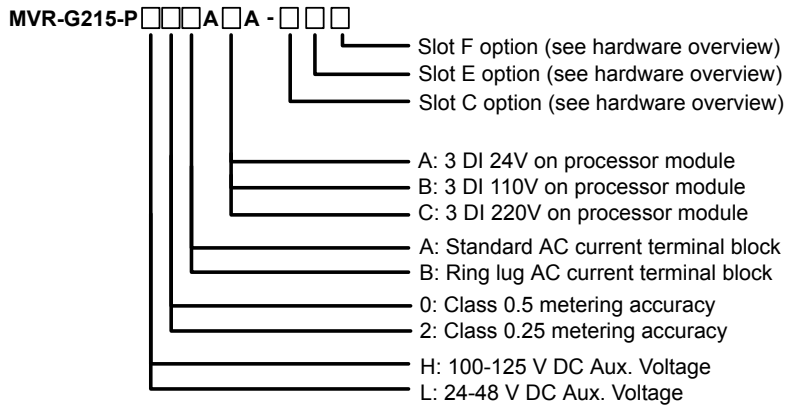

Hardware options overview

Option	Description
A	None (empty slot)
B	8 x isolated (2 groups) digital inputs 10 to 200 V DC
C	5 x relay outputs 220 V AC, 3 A 220 V DC, 0.3 A
D	Arc protection This option is not included in the marine approval.
G	2 x RJ45 100Mb Ethernet & IRIG-B* This option is not included in the marine approval.
H	2 x ST 100Mb Ethernet & IRIG-B* This option is not included in the marine approval.
I	4 x analogue outputs 0 to 24 mA scalable 1 x analogue input 0 to 24 mA scalable Max. 2 modules per relay
J	Double LC 100Mb Ethernet*
K	2 x RJ45 100 Mb Ethernet (HSR, PRP redundant protocols)*
L	1 x RS232 Fiber PP (Plastic-Plastic)*
M	1 x RS232 Fiber PG (Plastic-Glass)*

Option	Description
N	1 x RS232 Fiber GP (Glass-Plastic)*
O	1 x RS232 Fiber GG (Glass-Glass)*

NOTE * Only one additional communication module per relay, to be placed in the last slot (Slot F).

Additional features

- 5-year extended warranty
- Conformal coating of printed circuit boards

NOTE These features have to be ordered separately.

5.2.1 Disclaimer

DEIF A/S reserves the right to change any of the contents of this document without prior notice.

The English version of this document always contains the most recent and up-to-date information about the product. DEIF does not take responsibility for the accuracy of translations, and translations might not be updated at the same time as the English document. If there is a discrepancy, the English version prevails.

5.2.2 Copyright

© Copyright DEIF A/S. All rights reserved.