

ANSI codes 27, 59, 78, 81


Type G59 package

G59 protection relay package

uni-line

4921240217D

- **Combined vector shift and ROCOF (df/dt)**
- **Protection of over-/underfrequency**
- **3 phase protection of over-/undervoltage**
- **Digital data processing**
- **Fast decoupling of the generator**
- **Ensures no asynchronous reconnection**

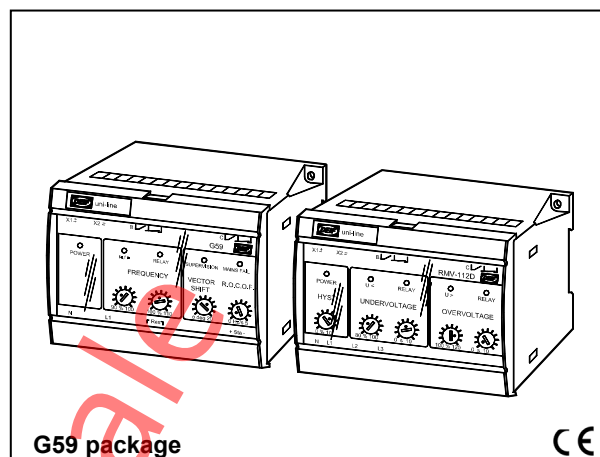

Note! Not in compliance with G59/2.

Application

The mains decoupling relay - type G59 package - forms part of a complete DEIF series of relays for the protection and control of generators.

This package is applied for the protection of synchronous generators, running in parallel with the mains. The package protects against over-/underfrequency, over-/undervoltage, vector shift and/or ROCOF (rate of change of frequency, df/dt).

In applications with only vector shift or ROCOF, the set point for the unwanted part is set at maximum and this part is hereby disabled.

A mains failure will be detected, provided a disconnection at an arbitrary point of the network results in a swift change of the generator frequency. An opening signal is then transmitted to the mains circuit breaker, and the generator will then be protected against damage caused by an automatic reconnection to the high-voltage network.

On the other hand, the vector shift/ROCOF will not detect the relatively slow and acceptable changes of the network frequency (the mains).

Frequency and voltage protection is needed to protect loads against unacceptable voltages and frequencies.

Furthermore, separating the generator from the mains in case of mains failure is also stipulated as a condition in most national rules for connection of synchronous generators to the mains.

Measuring principle

ROCOF, vector shift and frequency measure the voltage between 2 phases or between one phase and neutral. High measuring accuracy is achieved by digital data processing.

The ROCOF supervises the frequency change for every period. If the frequency change exceeds the set point for four periods in a row, the ROCOF has detected a failure.

The vector shift supervises the angular velocity of the mains by comparing the times for the latest two full cycles (1st, 2nd) with the times for the full cycles of the previous 4th and 5th period. If the vector shift or the ROCOF detects a failure, an opening signal is transmitted to the mains circuit breaker, and the LED marked "MAINS FAIL" is lit.

The over-/underfrequency supervise the frequency by supervising the latest 4 periods. If the under- or over-frequency set point is exceeded, the output is activated and the associated red LED is lit.

The over-/undervoltage part measures all 3 phase voltages. If the voltage drops below the set point or exceeds the upper set point, the associated output is activated and the associated red LED is lit.

The vector shift and the ROCOF are provided with 1 reset input connected to contacts to the generator circuit breaker and to the mains circuit breaker. These 2 contacts close when the respective circuit breaker is opened. When RESET (22-23) is activated, the vector shift and the ROCOF part will not detect a possible mains failure. This function ensures that the relay is only active when both circuit breakers are closed and the generator is thus running in parallel with the mains.

The vector shift and the ROCOF are provided with an initialising timer, which is activated when cancelling the reset signal (closing of circuit breakers). When this timer expires, the vector shift and the ROCOF are activated and the LED "SUPERVISION" is lit. The time delay is fixed at 5s.

Relay outputs

The package is provided with 4 outputs either normally energised or normally de-energised. The contacts may be set to open or to close on activation.

Power-up circuit

The relays are provided with a 200 ms power-up circuit, ensuring the correct function of the relay on connection of the auxiliary voltage.

Type G59 package

Technical specifications

Meas. voltage (U_n): See supply voltage - AC ranges

Overload: 1.2 x U_n, continuously
2 x U_n for 10 s

Load: 2kΩ/V
UL/cUL listed: 57.7...450V AC

Frequency range: 40...45...65...70 Hz

Nom. frequency (f_n): 50 Hz or 60 Hz

“RESET” inputs: Input voltage:
18...250V AC/DC for “activated”
condition

Input impedance: 100 kΩ

Output: 4 change-over switches

Contact type: Relays B₁+C₁, B₂+C₂:
Normally energised (“NE”), or
normally de-energised (“ND”)
with or without latch circuit (“I”)

Contact ratings: 250V AC/24V DC, 8 A
(200 x 10³ change-overs at resistive
load)

Contact voltage: Max. 250V AC/150V DC
UL/cUL listed: Resistive load only

Response time: Vector shift <30 ms
R.O.C.O.F. <100 ms
Frequency <100 ms
Voltage <100 ms

Galvanic separation: Between inputs and outputs:
3250 V – 50 Hz - 1 min.

Supply voltage (U_n): 57.7-63.5-100-110-127-200-220-230-
240-380-400-415-440-450-660-690V AC
±20% (max. 4 VA)
24-48-110-220V DC -25/+30%
(max. 5.5 W)

UL/cUL listed: Only 24V DC and
110V AC
DC supply must be from a class 2 power
source

Climate: HSE, to DIN 40040

EMC: To EN 61000-6-1/2/3/4,
SS4361503 (PL4) and IEC 255-3

Connections: Max. 4.0 mm² (single-stranded)
Max. 2.5 mm² (multi-stranded)

Materials: All plastic parts are self-extinguishing to
UL94 (V1)

Protection: Case: IP40. Terminals: IP20,
to IEC 529 and EN 60529


UL markings:

Wiring:
Use 60/75°C (140/167°F) copper
conductors only

Wire size:
AWG 12-16 or equivalent

Installation:
To be installed in accordance with the
NEC (US) or the CEC (Canada)

Connections

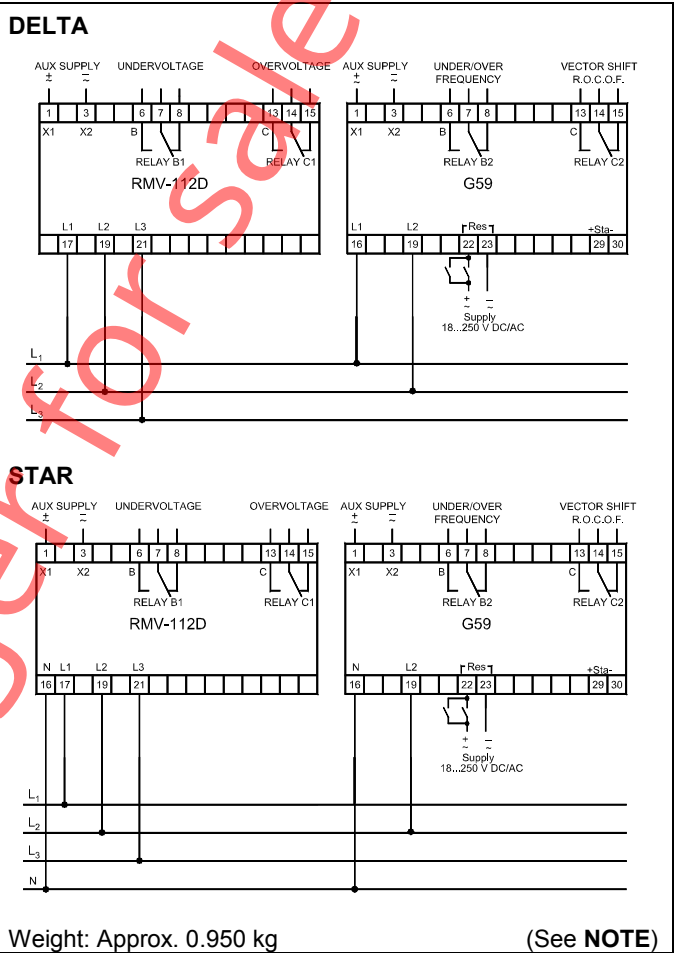

NOTE:

See the installation instructions for information about status
output (29-30).

Type G59 package

Settings and indications


| Setting of | LED/relay |
|--|---|
| Vector shift set point: (2...20 elect. degr.) Initialising delay: Fixed at 5s | Red LED "MAINS FAIL" is lit during fault condition |
| R.O.C.O.F. set point: (0.3...5) Hz/s Initialising delay: Fixed at 5s | Red LED "MAINS FAIL" is lit during fault condition |
| Underfrequency set point: (90...100%) of f_n | "f>, f<" yellow LED is lit when the frequency has dropped below the set point, but the relay is not yet activated |
| Overfrequency set point: (100...110%) of f_n | "f>, f<" yellow LED is lit when the set point is exceeded, but the relay is not yet activated |
| Undervoltage limit: (80...100%) of U_n | "U<" yellow LED is lit when the input voltage is lower than the preset limit, but the relay is not yet activated |
| Overvoltage limit: (100...120%) of U_n | "U<" yellow LED is lit when the input voltage is lower than the preset limit, but the relay is not yet activated |
| Hysteresis: (1...10%) of U_n | Relay contact is reset when fault voltage equals or is less than the preset hysteresis |

Once the relay has been mounted and adjusted, the transparent front cover may be sealed, preventing unwanted change of the setting.

Order specifications

| | |
|--|-------------------------------|
| Relay B₁: | Undervoltage |
| Relay C₁: | Overvoltage |
| Relay B₂: | Over-/underfrequency |
| Relay C₂: | Vector shift/ROCOF |
| Star coupling: | Specify phase-neutral voltage |
| Delta coupling: | Specify phase-phase voltage |
| Type – Coupling – Meas. voltage – Nom. frequency – Relay B₁ – Relay C₁ – Relay B₂ – Relay C₂ – Supply voltage | |
| <i>Examples:</i> | |
| G59 package – delta – 400V AC – 50 Hz – NDL – NDL – NDL – ND – 24V DC | |
| G59 package – star – 230V AC – 50 Hz – NDL – NDL – NDL – ND – 230V AC | |

Due to our continuous development we reserve the right to supply equipment which may vary from the described.



DEIF A/S, Frisenborgvej 33
DK-7800 Skive, Denmark

Tel.: +45 9614 9614, Fax: +45 9614 9615
E-mail: deif@deif.com, URL: www.deif.com

