


kWh meters

WQR96 MKII, WQR96-x MKII, WQR96-c MKII

Data Sheet



Improve
Tomorrow

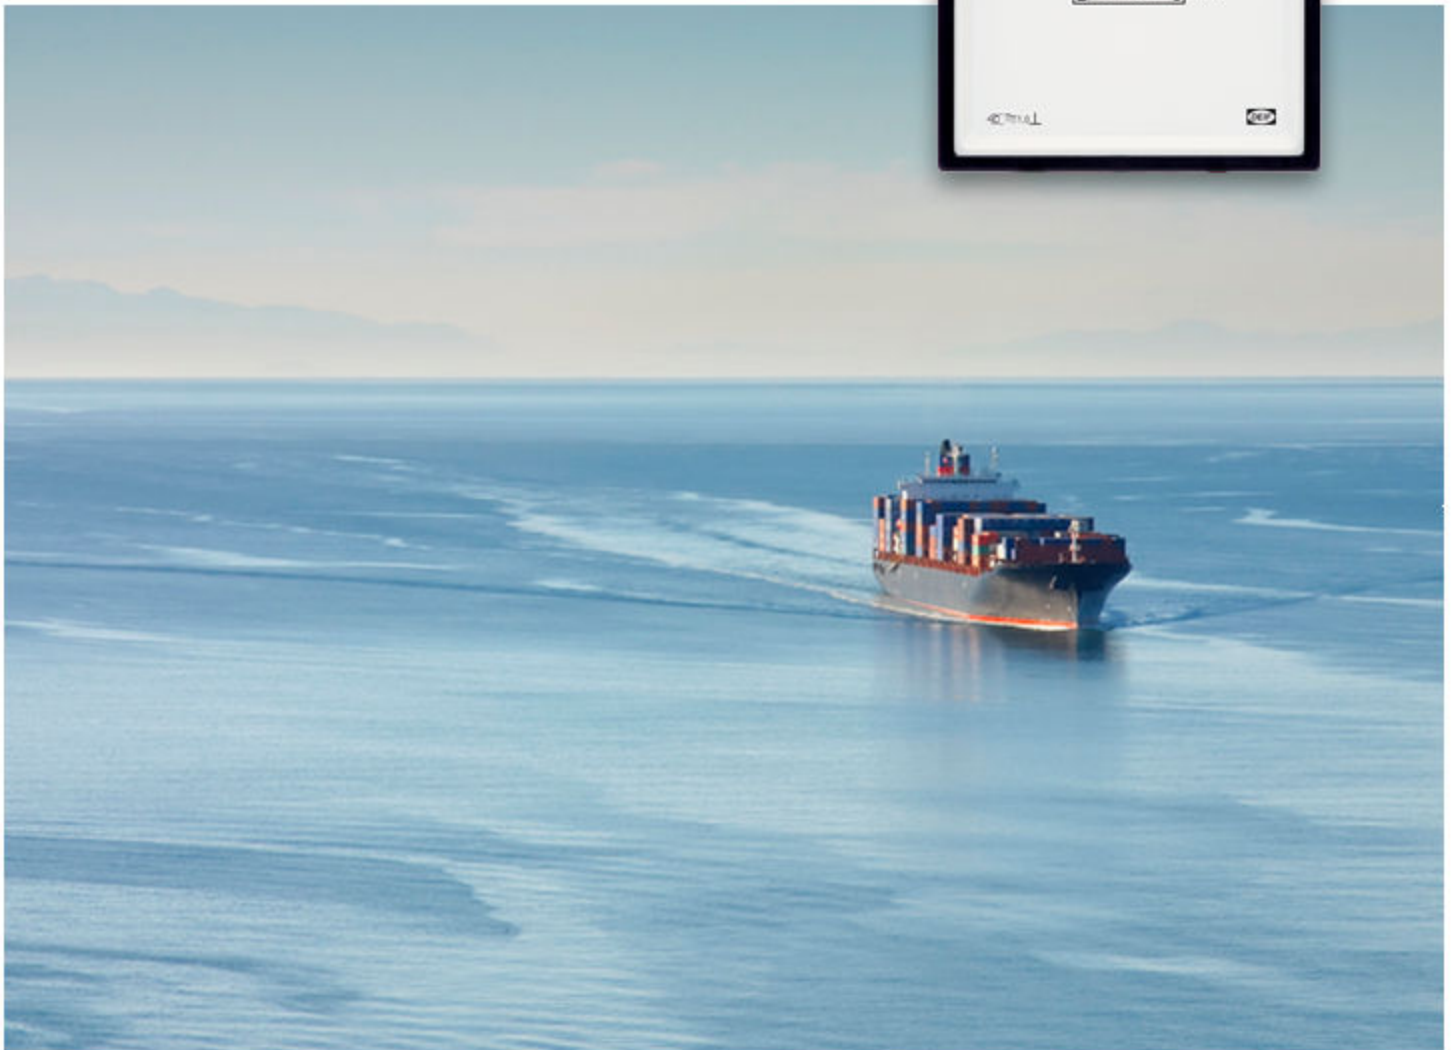



DATA SHEET



kWh meters

WQR96 MKII, WQR96-x MKII, WQR96-c MKII

- Accuracy class 1.0 (EN 62053-21)
- For single-phase and 3-phase networks
- Microprocessor-controlled meters with pulse output (SO)
- Simultaneous measurement of two quantities (except type WQR96 MKII)
- 60 to 400 V AC aux. power supply
- Complies with Electricity metering equipment standard (IEC 62052-11)



DEIF A/S · Frisenborgvej 33 · DK-7800 Skive
Tel.: +45 9614 9614 · Fax: +45 9614 9615
info@deif.com · www.deif.com

Document no.: 4921210157F

Application

The kWh meters type WQR96 MKII are intended for energy measurement in single-phase and 3-phase networks, providing a class 1.0 measurement of the imported or exported energy. The meters are microprocessor-controlled and equipped with a 7-digit electromechanical counter, which retains the reading in case of supply voltage failure. The meters are furthermore equipped with one or two pulse outputs. The meters can be adapted to the applied current transformers.

- WQR96 MKII** Meter with a 7-digit register and one pulse output for measurement of one type of energy only (kWh or kvarh).
- WQR96-x MKII** Meter with both a 7-digit register and one pulse output for energy measurement (kWh or kvarh) and a 90° instrument for simultaneous indication of the momentary power value (active or reactive).
- WQR96-c MKII** Meter with both a 7-digit register and one pulse output for energy measurement (kWh or kvarh) and a 240° instrument for simultaneous indication of the momentary power value (active or reactive).

Technical specifications

Auxiliary voltage	60, 100, 230, 400 V AC ± 20 %
Rated frequency	45 to 65 Hz
Wire	Multi-stranded: 1.5 mm ² Single-stranded: 2.5 mm ²

Measuring specifications

Meas. voltage Un	Ph-N 400 V AC Ph-Ph 690 V AC, range ± 20 % Consumption: < 0.1 VA per phase Overload capacity: 1.5 $\times$ Un continuously 2 $\times$ Un for 10 s
Meas. current In	-/1 A or -/5 A, range 0 to 1.6 $\times$ In Consumption: < 0.1 VA per phase Overload capacity: 3 $\times$ In continuously 25 $\times$ In for 3 s 50 $\times$ In for 1 s
Meas. frequency	50/60 Hz, range 16 to 400 Hz
Accuracy	Energy: Active energy EN62053-21: Class 1. Reactive energy EN62053-23: Class 2 Power: 1.5 % of scale at nominal temperature range 10 to 30 °C. Outside this range, 3 % of scale


Output and counter specifications

Relay outputs	Max. 250 V (AC), max. 100 V (DC)
Contact rating	AC: 250 V - 6 A - 1500 VA (250 V AC - 6 A resistive AC load 100,000 operations) DC: 35 V - 6 A - 210 W (30 V DC - 6 A resistive load 500,000 operations) Pulse duration: 100 ms No. of outputs: 2
Electromechanical counter	7 digits, each 4 $\times$ 1.2 mm 1 pulse per selected unit (for example kWh)
Relay pulse output	Selectable (1 to 4000) Max. pulses per hour: 4000 Pulse duration: 100 ms
Isolation	1000 V (AC) between open contacts 4000 V (AC) between coil and contacts

Type test specifications

Temperature	-10 to 55 °C (operating) -25 to 70 °C (storage)	IEC/EN 62052-11
Climate	Relative humidity ≤75 %	IEC/EN 62052-11
Vibration	3 to 13.2 Hz: 2 mm _{pp} 13.2 to 100 Hz: 0.7 g	IEC/EN 60068-2-6 & IACS UR E10
Shock	50 g, 11 ms, half sine Tested with 3 impacts in each direction in all 3 axes In total 18 impacts per test	IEC/EN 60068-2-27, test Ea
Safety	Installation cat. III 600 V/cat. II 300 V Pollution degree 2 Tested to 2210 volt	IEC/EN 61010-1 tested at 50 Hz, 1 min Each galvanic group tested to other galvanic groups and to protection earth
EMC		IEC/EN 62052-11 IEC/EN 60533 power distr. zone IACS UR E10 power distr. zone
Materials	All plastic parts are self-extinguishing	UL94 (V0)
Protection	Front: IP52 (IP54 optional by gasket) Housing/terminals: IP20	IEC/EN 60529
Approvals	See DEIF homepage for valid approval	www.deif.com


Connection diagrams

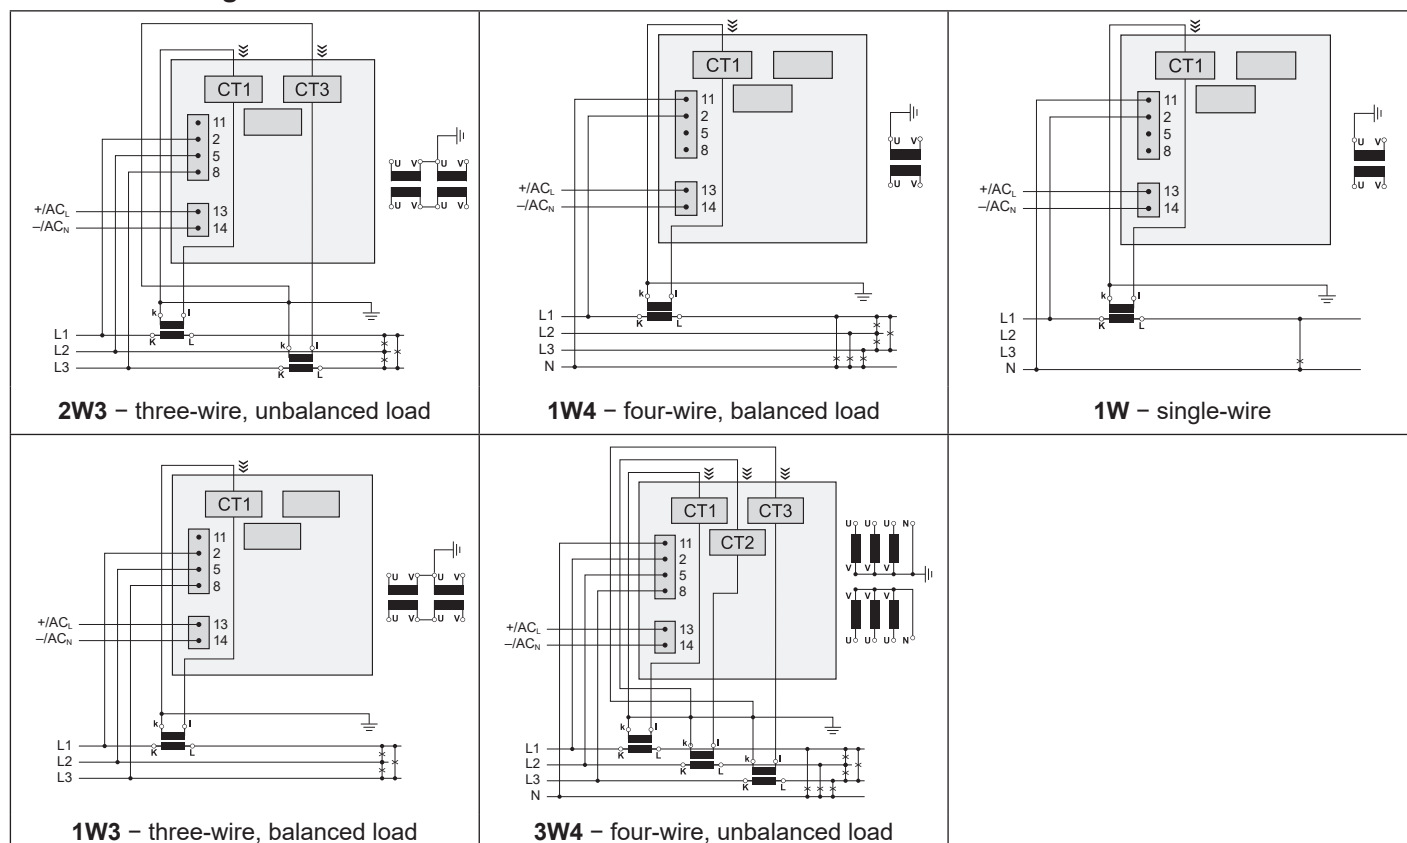

Terminals

Inputs/Quantities		Terminals	
Measuring inputs	AC current	IL1	CT1 (1-3) (k-l)
		IL2	CT2 (4-6) (k-l)
		IL3	CT3 (7-9) (k-l)
	AC voltage	UL1	2 (L1)
		UL2	5 (L2)
		UL3	8 (L3)
		N	11
Auxiliary power supply		+/ACL	13
		-/ACN	14
Output modules	Output	Out –1	15
		C–12	16
		Out –2	17

Dimensions in mm/auxiliary voltage/output connections

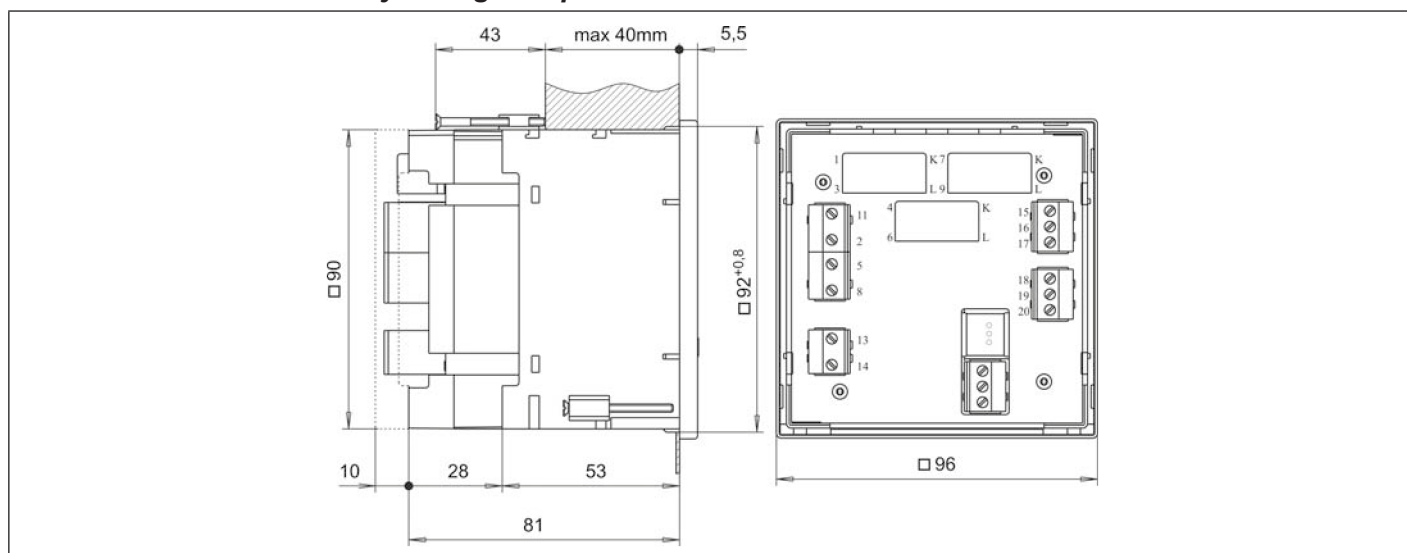

Order specifications

WQR96 MKII

Examples:

Type	AUX	Connection	VT ratio	CT ratio	Counter(s)	Relay 1 (2)	Relay 2
WQR96	60	1W3	10,000/100 V	100/1 A	1p/Mvarh	1p/Mvarh	-

WQR96-x MKII/WQR96-c MKII

Examples:

Type	AUX	Connection	VT ratio	CT ratio	Counter	Relay 1 & 2	Scale
WQR96-x	230	3W4	10,000/400 V	100/5 A	1p/MWh	10p/MWh	0 to 2 MW
WQR96-c	400	3W4	10,000/100 V	200/5 A	1p/MWh	1p/MWh	0 to 4 MW

Note: If there is no VT, the pulse duration is normally 1, 10 or 100 p/kWh/kvarh.



DEIF A/S, Frisenborgvej 33
 DK-7800 Skive, Denmark
 Tel.: +45 9614 9614, Fax: +45 9614 9615
 E-mail: deif@deif.com, URL: www.deif.com



Due to our continuous development we reserve the right to supply equipment which may vary from the described

