

# ACM3.1

Alternating current module

Data sheet



## **1. Series 300**

1.1 About the hardware modules.....	3
-------------------------------------	---

## **2. Technical specifications**

2.1 Alternating current module ACM3.1.....	4
--	---

## **3. Legal information**


3.1 Disclaimer and copyright.....	6
-----------------------------------	---

# 1. Series 300


## 1.1 About the hardware modules

The hardware modules are printed circuit boards that slot in to either a rack R7.1 or rack R4.1. Depending on the type of module, they can provide AC or other measurements, inputs, outputs and give communication indication.

Example rack R7.1

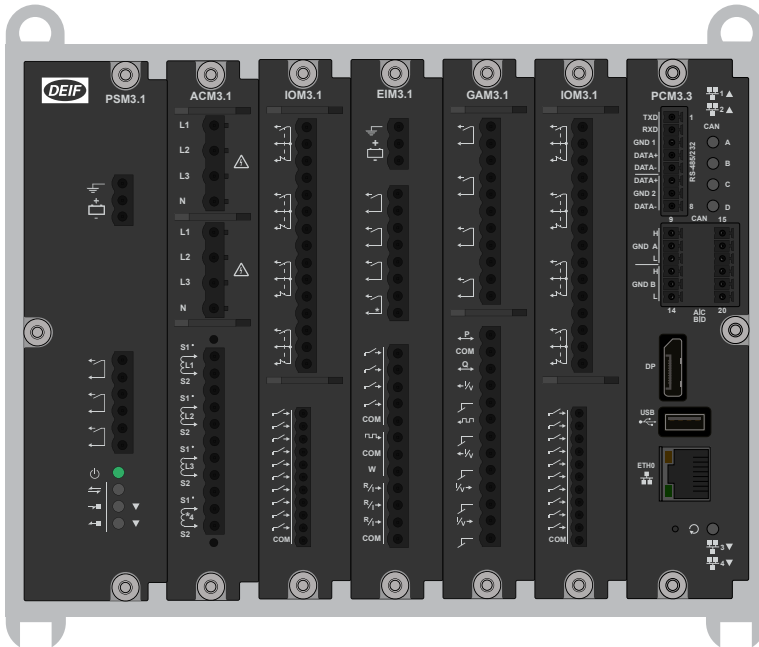

Example rack R4.1

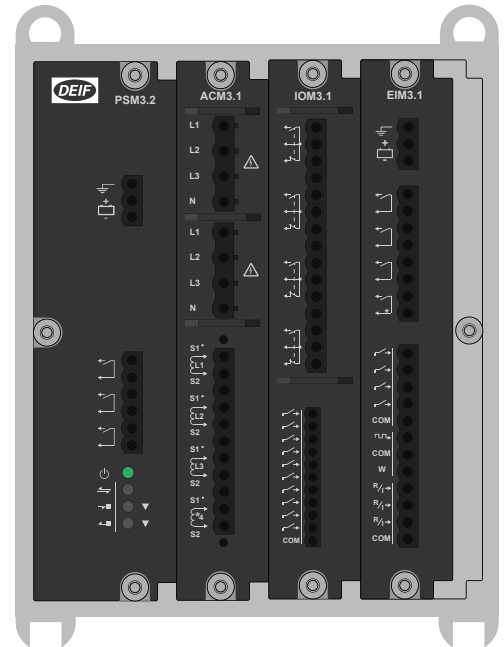

The hardware modules feature:

- Placement flexibility in the rack.
- Add, replace, or remove on-site.
- Automatically recognised.
- Configurable input and output functions (digital and analogue where applicable).

All slots must be covered during operation and blind modules can be used to cover unused slots.



## 2. Technical specifications

### 2.1 Alternating current module ACM3.1

The alternating current module ACM3.1 measures the voltage and current on one side of a breaker, and the voltage on the other side. The hardware module responds when the measurements exceed the AC alarm parameters.

ACM3.1 provides robust frequency detection in environments with electrical noise. ACM3.1 allows extended measurement bandwidth up to 40 times the nominal frequency. ACM3.1 includes a configurable 4th current measurement.

#### ACM3.1 terminals

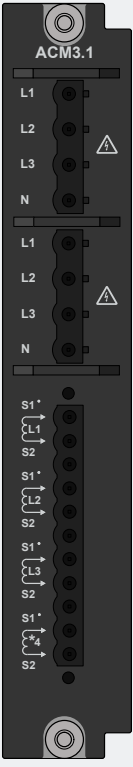Module	Count	Symbol	Type	Name
	2 × (L1, L2, L3 and N)	L1/L2/L3/N	Voltage	3-phase voltage measurements
	1 × (L1, L2, L3 and 4th)		Current	3-phase current measurement  4th current measurement

#### ACM3.1 technical specifications

Category	Specification
<b>Voltage measurements</b>	Nominal value: 100 to 690 V AC phase-to-phase Measurement range: 2 to 897 V AC phase-to-phase Accuracy: Class 0.2 Phase angle accuracy: 0.1° (within nominal voltage range and nominal frequency range) Altitude derating from 2,000 to 4,000 m (6,562 to 13,123 ft): 100 to 480 V AC phase-to-phase UL/cUL Listed: 100 to 600 V AC phase-to-phase Load on external voltage transformer: Maximum 0.2 VA/phase Voltage withstand: 1.2 × Nominal voltage continuously; 1.3 × Nominal voltage for 10 s
<b>Current measurements</b>	Nominal value: 1 or 5 A AC from current transformer Measurement range: 0.02 to 17.5 A AC from current transformer; Truncation level: 11 mA Accuracy: Class 0.2 Earth current: 18 dB attenuation of third harmonic of the nominal frequency UL/cUL Listed: From listed or R/C (XODW2.8) current transformers 1 or 5 A Load on external current transformer: Maximum 0.3 VA/phase Current withstand: 10 A continuously; 17.5 A for 60 s; 100 A for 10 s; 250 A for 1 s
<b>Frequency measurements</b>	Nominal value: 50 Hz or 60 Hz

Category	Specification
	Measurement range: 35 to 78 Hz Accuracy: Class 0.1 of nominal value (35 to 78 Hz) (-40 to 70 °C) (-40 to 158 °F) Class 0.02 of nominal value (40 to 70 Hz) (15 to 30 °C) (59 to 86 °F)
<b>Power measurements</b>	Accuracy: Class 0.5
<b>Accuracy and temperature</b>	Unless otherwise specified for the above measurements: Nominal range: -40 to 70 °C (-40 to 158 °F) Reference range: 15 to 30 °C (59 to 86 °F) Accuracy: Measurement type specific within reference range Additional 0.2 % error of full scale per 10 °C (18 °F) outside reference range
<b>Torques and terminals</b>	Module faceplate screws: 0.5 N·m (4.4 lb-in) Secure the current measurement terminal block to the module faceplate: 0.25 N·m (2.2 lb-in) Connection of wiring to terminals: 0.5 N·m (4.4 lb-in) UL/cUL Listed: Wiring must be minimum 90 °C (194 °F) copper conductors only
<b>Terminal connections</b>	AC voltage and current terminals: Standard 45° plugs, 2.5 mm <sup>2</sup> Wiring: 2.5 mm <sup>2</sup> (13 AWG), multi-stranded
<b>Galvanic isolation</b>	Between AC voltage and other I/Os: 3310 V, 50 Hz for 60 s Between AC current and other I/Os: 2210 V, 50 Hz for 60 s
<b>Ingress protection</b>	Unmounted: No protection rating Mounted in rack: IP20 according to IEC/EN 60529
<b>Dimensions</b>	L×H×D: 28 × 162 × 150 mm (1.1 × 6.4 × 5.9 in)
<b>Accessories (included)</b>	<ul style="list-style-type: none"> <li>• One roundel with 6 J-shaped voltage encoding pins (for the hardware module)</li> <li>• One roundel with 6 flat voltage encoding pins (for the voltage terminal blocks)</li> </ul>
<b>Weight</b>	232 g (0.5 lb)

## 3. Legal information

### 3.1 Disclaimer and copyright

#### Open source software

This product contains open source software licensed under, for example, the GNU General Public License (GNU GPL) and GNU Lesser General Public License (GNU LGPL). The source code for this software can be obtained by contacting DEIF at support@deif.com. DEIF reserves the right to charge for the cost of the service.

#### General warranty

The warranty period for the purchased product is defined in the contract and order acknowledgement. In general, DEIF's Terms and Conditions of Sale and Delivery apply.

The product continuously monitors the operating temperature and stores this information in a log file on the device. DEIF uses this information for service purpose and to validate if issues with the product are covered by the warranty.

The software packages supplied are believed to be of the highest quality. Due to the nature of the software development process, it is possible that there are hidden defects in the software which may affect its use, or the operation of any software or device developed with this software package.

DEIF does not undertake responsibility for determining whether this package is suitable for the application, nor for ensuring the correct operation of the application software and hardware.

The warranty does not cover product wear parts, such as:

- Internal flash disc
- If applicable, SD card (purchased separately)
- Replaceable coil-cell battery, used for the real-time clock (available as a spare part)

#### Trademarks

DEIF and the DEIF logo are trademarks of DEIF A/S.

*Bonjour*<sup>®</sup> is a registered trademark of Apple Inc. in the United States and other countries.

*Adobe*<sup>®</sup>, *Acrobat*<sup>®</sup>, and *Reader*<sup>®</sup> are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States and/or other countries.

*CANopen*<sup>®</sup> is a registered community trademark of CAN in Automation e.V. (CiA).

*SAE J1939*<sup>®</sup> is a registered trademark of SAE International<sup>®</sup>.

*CODESYS*<sup>®</sup> is a trademark of CODESYS GmbH.

*EtherCAT*<sup>®</sup>, *EtherCAT P*<sup>®</sup>, *Safety over EtherCAT*<sup>®</sup>, are trademarks or registered trademarks, licensed by Beckhoff Automation GmbH, Germany.

*VESA*<sup>®</sup> and *DisplayPort*<sup>®</sup> are registered trademarks of Video Electronics Standards Association (VESA<sup>®</sup>) in the United States and other countries.

*Google*<sup>®</sup> and *Google Chrome*<sup>®</sup> are registered trademarks of Google LLC.

*Linux*<sup>®</sup> is a registered trademark of Linus Torvalds in the U.S. and other countries.

*Modbus*<sup>®</sup> is a registered trademark of Schneider Automation Inc.

*Torx*<sup>®</sup>, *Torx Plus*<sup>®</sup> are trademarks or registered trademarks of Acument Intellectual Properties, LLC in the United States or other countries.

*Windows*<sup>®</sup> is a registered trademark of Microsoft Corporation in the United States and other countries.

All trademarks are the properties of their respective owners.

## **Copyright**

© Copyright DEIF A/S. All rights reserved.

## **Disclaimer**

DEIF A/S reserves the right to change any of the contents of this document without prior notice.

The English version of this document always contains the most recent and up-to-date information about the product. DEIF does not take responsibility for the accuracy of translations, and translations might not be updated at the same time as the English document. If there is a discrepancy, the English version prevails.