



Improve
Tomorrow

XDi 96 Dual

Revolutions (+RPM)



Library owner: DEIF STANDARD LIB

Library number: 42

Library version: 2007

Table of Contents

1	LIBRARY INFORMATION	3
2	PRODUCT PROFILES (PP)	4
3	VIRTUAL INDICATORS (VI)	6
4	DETAILED VIRTUAL INDICATOR (VI) DESCRIPTION	7

Library description :	
This XDi Dual library contains a selection of 0-100 %RPM and 0-X RPM indicators (VI). Each virtual indicators has a selection of input/output setup profiles (VS) covering the most common used combination of XDi-net, CANopen, AX1 analogue and DX1 digital inputs. Some VS profile also supports the NX NMEA extension module. Default CAN bus setup and dimmer input configurations are available in the selection of product profiles (PP). Select the VS and PP profile that fits your need for CAN, Analogue or Digital inputs and make the necessary adjustments via the XDi installation menu or user menu. All indicators present RPM setpoint (commanded RPM) value as default, but this function can be disabled from the XDi installation menu: Edit virtual indicator/Indicators/RPM order -> Visible: Off and RPM order digi -> Visible: Off This library is using XDi platform 2 main software. All analogue 4-20 mA inputs have now an input lost / out of range error function.	
Library status symbols :	
	Released & Locked
	Approved
	Pending
	Draft
	Not approved

Timestamp 30-09-2025 16:37:14

Library Specification

Library owner no. : 000001
Library owner name : DEIF STANDARD LIB
Product type : XDi 96
Performance class : Dual
Library number : 42
Library name : Revolutions (+RPM)
Library orientation : Landscape
Library status : Released & Locked
Library version : 2007

Last changed : 30-09-2025 16:37:04

Library default settings :

180 display rotation : False
CAN NodeID : 30

Library notes :

30-09-2025/JOL, Ver.2007: Added TPDO output to all relevant VS profiles.
The TPDO containing the RPM value either from analogue or digital input.

09-05-2023/JOL, Ver. 2006: VI019 (0-2500RPM) is added.

08-02-2023/MAP, Ver. 2005: XDi main software update to Qt v.3.06.1 and Capp software is updated to v.3.06.0, this version supports presentation of UK MER flag mark in surveyor menu in addition to the wheel marking, no other changes are made.

26-07-2022/JOL, v2004: VI015, VI016, VI017 and VI018 are added.

.....

02-02-2022/JOL, v.2003: First released version on platform 2. VI014 is added.
4-20mA input lost warning is added on all relevant VS profiles.

.....

08-01-2019/JOL, v0003: PP06 ECR, default dimmer setting is changed to 80%. (Last Platform 1 lib. version)

Default settings of product and system related parameters, as dimmer and CANbus settings are stored in a product profile.

Timestamp 30-09-2025 16:37:14

PP No.	PP Name	Description	Status	Notes
1	PP01 Net/Front	XDi-net/Front dimmer Dimmer via XDi-net and/or via front buttons, the 4-button front frame kit is required. Default settings: XDi-net is active Dimmer group 1 Auto Day/Night Shift at 70% Pushbutton dimmer is shared on XDi-net Monitoring supply volt. 1		CANbus and Dimmer settings can be changed from XDi menu. Contact inputs from external dimmer pushbuttons are available on the NX1 module, the function must be activated from menu.
2	PP02 Analogue	Analogue Dimmer Required: AX1 in Slot 1 Dim potmeter(+term 3 - term 1, wiper term 2) Can be reconfigured to voltage input Default settings: Dimmer group 1 Analogue Potmeter 0 to Vref (max. 30V) Auto Day/Night Shift at 70% Shared on XDi-net Monitoring supply volt. 1		An external ref. voltage >7.5V can be connected to Vref out overwriting the internal Vref. From the user menu, you can alternatively reconfigure the analogue dimmer input to a normal voltage input.
3	PP03 CAN	CAN Dimmer CANopen TPDO dimming and/or via front buttons, the 4-button front frame kit is required Default settings: Dimmer group 1 Auto Day/Night Shift at 70% Monitoring supply volt. 1		DEIF default TPDO's are predefined and used in all standard libraries. The default TPDO's for dimmer group control can be changed to any TPDO or RPDO via user menu. Contact inputs from external dimmer pushbuttons are available on the NX1 module, the function must be activated from menu.
4	PP04 Digital	Digital Dimmer Required: DX1 in Slot 1 Digital input 1 up (+term 11,- term 10) Digital input 2 down (+term 8,- term 7) Simultaneous activation of IN1 and IN2 for Day/Night Shift Default settings: Dimmer group 1 Shared on XDi-net Monitoring supply volt. 1		Digital input configuration can be changed from menu.

PP No.	PP Name	Description	Status	Notes
5	PP05 Lo Analog	Analogue Dimmer Local Required: AX1 in Slot 1 Dim potmeter (+ term 3 - term 1, wiper term 2) Can be reconfigured to voltage input Default settings: Dimmer group: Local Analogue Potmeter 0 to Vref (max. 30V) Auto Day/Night Shift at 70% (Local - Not shared XDi-net) Monitoring supply volt. 1		The dimmer group is "Local" and the dimmer input will only affect this unit, dimmer level will not be shared on XDi-net.
6	PP06 ECR Fixed	ECR Fixed Dimmer Change dimming level using front buttons Default settings: Dimmer group Local Fixed dimmer level 80% Higher constant backlight level reduce life (Local - Not shared XDi-net) Auto Day/Night Shift at 20% Monitoring supply volt. 1		Default fixed dimmer level is reduced to 80% to extend backlight life. Dimmer level and Day/Night colour can be changed from user menu. The 4-button front frame kit can be used for front button dimmer. Contact inputs from external dimmer pushbuttons are available on the NX1 module, the function must be activated from menu.

Virtual Indicators (VI)



The VI contains the graphical layout of and indicator and defines all data types that are presented on the indicator.

Each VI has at least one VI-setup profile (VS) that defines the input types and default parameter settings.

Timestamp 30-09-2025 16:37:14

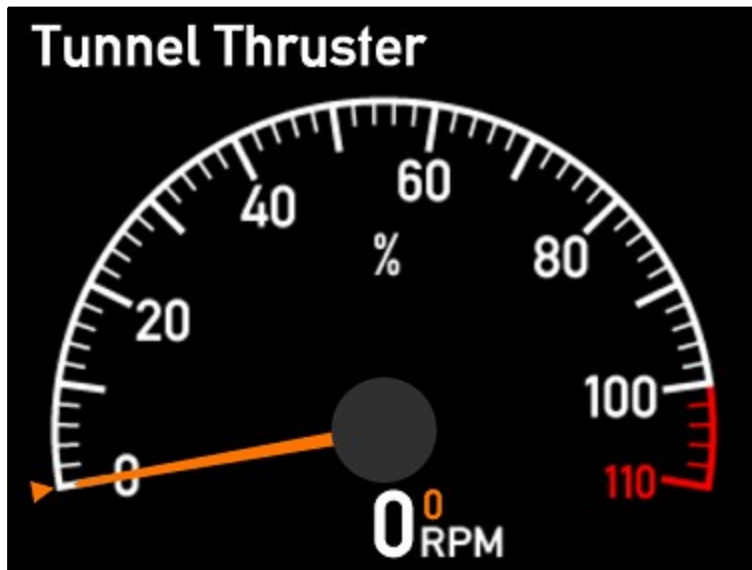
VI No.	Name	VI-setup profiles (VS)	Approvals	Status
001	0...110%	5	 	
002	Reserved	1	 	
003	Reserved	1	 	
004	0...100	5	 	
005	0...125	5	 	
006	0...150	5	 	
007	0...200	5	 	
008	0...250	5	 	
009	0...300	5	 	
010	0...350	5	 	
011	0...400	5	 	
012	0...450	5	 	
013	0...500	5	 	
014	0...1000	5	 	
015	0...1250	5	 	
016	0...1500	5	 	
017	0...1750	5	 	
018	0...2000	5	 	
019	0...2500	5	 	

 Approvals only apply for XDi 192.

Timestamp 30-09-2025 16:37:14

VI 001

0...110%

**Description :** RPM/%RPM

Propeller RPM% 0...110%
Actual RPM ± 3276 digital

Status : All with set point

VI Notes : RPM% scale can be configured from the XDi menu to match different input values.
This makes this indicator quite universal.
Setpoint is also presented for RPM/RPM%, but this function can be individually disabled.

VI-setup profiles (VS) for VI001

VS No.	Name	Description	Status	Notes
1	VS01 XDi-net	Input XDi-net RPM: XDi-net (0x3081:02) RPM%: XDi-net (0x3091:02) RPM set: XDi-net (0x3081:07) RPM% set: XDi-net (0x3091:07)		The XDi-net profile is used when the indicator is a repeater, receiving data from other XDi units or from a CAN controller providing data in XDi-net format. Please note that TPDO's or RPDO's are not retransmitted in XDi-net format, but are used directly by all indicators (e.g. Angle transmitted CAN data), zero or scaling adjustments can be synchronized via XDi-net. Use VS02 if a combination of XDi-net and TPDO inputs (e.g. CAN encoder) are used. This profile has NMEA output support requires NX1 extension module
2	VS02 TPDO	Input TPDO or XDi-net RPM/RPM%: TPDO RPM/RPM% set: TPDO		TPDO COBID can be changed to any valid TPDO or RPDO COBID via the XDi installation menu. TPDO input can be scaled from menu. This profile can also be used for XDi-net input, if a combination of TPDO and XDi-net is used. TPDO input can be disabled to run pure XDi-net. This profile has NMEA output support requires NX1 extension module
3	VS03 Analog	Analogue Required: AX1 in Slot 1 RPM/RPM%: AX1 S1i1: 4-20mA (+term9, -term8) RPM/RPM% set: AX1 S1i2: 4-20mA (+term5, -term4) input lost below 3.5mA TPDO out can be activated from Output menu: RPM: 0x183 Byte 0 and 1 RPM%: 0x188 Byte 0 and 1 Both 16b signed 0.1 res.		Analogue input type and scaling can be changed from XDi installation menu. If you change to an input different from 4-20mA then the input error parameters must also be changed.

VI-setup profiles (VS) for VI001

VS No.	Name	Description	Status	Notes
4	VS04 RPM PU	RPM Pickup Required: DX1 in Slot 1 RPM/RPM%: DX1 S1i1: (+term11, -term10), RPM/RPM% set: TPDO/XDi TPDO out can be activated from Output menu: RPM: 0x183 Byte 0 and 1 RPM%: 0x188 Byte 0 and 1 Both 16b signed 0.1 res.		TPDO COBID and input data scaling can be changed from the XDi installation menu. The TPDO input can be disabled to use XDi-net instead. Digital RPM input scaling can be changes from XDi installation menu.
5	VS05 Analog Set	Analogue Set Required: AX1 in Slot 1 RPM/RPM%: TPDO/XDi RPM/RPM% set: AX1 S1i2: 4-20mA (+term5, -term4) 4-20mA input lost below 3.5mA		TPDO COBID and input data scaling can be changed from the XDi installation menu. The TPDO input can be disabled to use XDi-net instead. Analogue input type and scaling can be changes from XDi installation menu. If you change to an input different from 4-20mA then the input error parameters must also be changed.

VI 002

Reserved



Description : Reserved

Reserved for future use

Status : 

VI Notes :

VI-setup profiles (VS) for VI002

VS No.	Name	Description	Status	Notes
1	Setup	Setup Add description Add description.		

VI 003

Reserved



Description : Reserved

Reserved for future use

Status : 

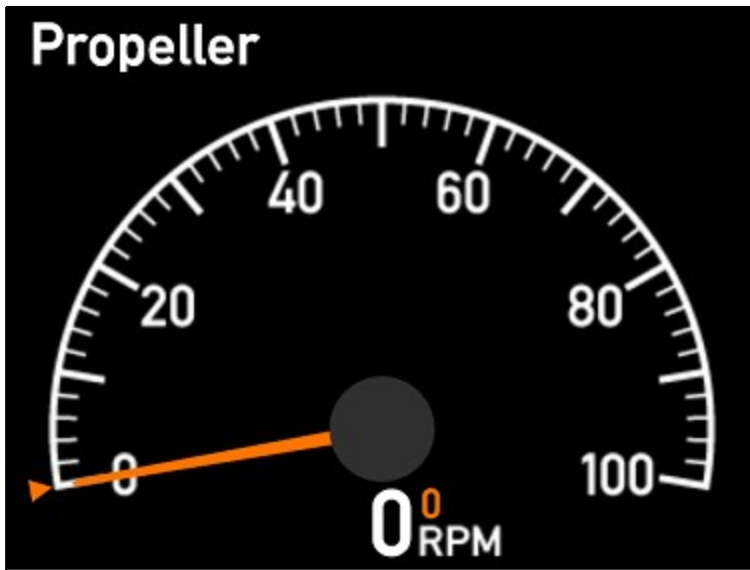
VI Notes :

VI-setup profiles (VS) for VI003

VS No.	Name	Description	Status	Notes
1	Setup	Setup Add description Add description.		

VI 004

0...100

**Description :** 0...100 RPM

Propeller RPM 0...100
Actual RPM ± 3276 digital

All with set point

Status :**VI Notes :****VI-setup profiles (VS) for VI004**

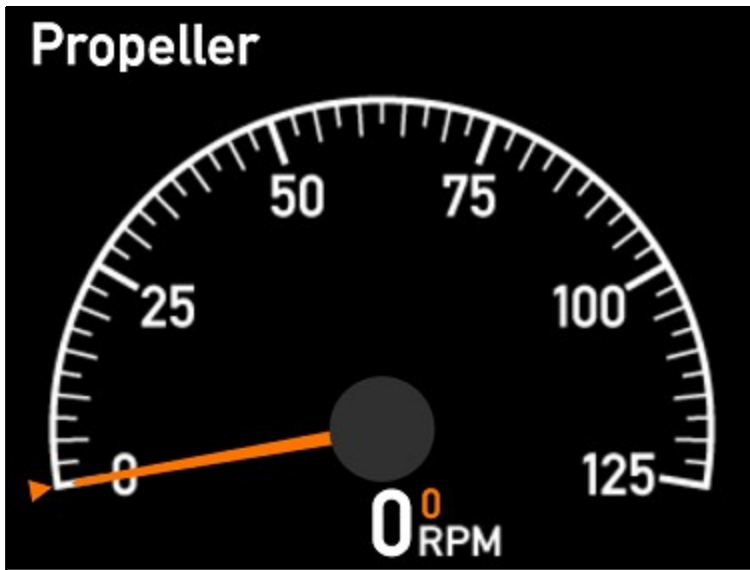
VS No.	Name	Description	Status	Notes
1	VS01 XDi-net	Input XDi-net RPM: XDi-net (0x3081:02) RPM set: XDi-net (0x3081:07)		See similar VS profile for VI001
2	VS02 TPDO	Input TPDO or XDi-net RPM: TPDO RPM set: TPDO		See similar VS profile for VI001

VI-setup profiles (VS) for VI004

VS No.	Name	Description	Status	Notes
3	VS03 Analog	Analogue Required: AX1 in Slot 1 RPM: AX1 S1i1: 4-20mA (+term9, -term8) RPM set: AX1 S1i2: 4-20mA (+term5, -term4) input lost below 3.5mA TPDO out can be activated from Output menu: RPM: 0x183 Byte 0 and 1 16b signed, 0.1 res.		See similar VS profile for VI001
4	VS04 RPM PU	RPM Pickup Required: DX1 in Slot 1 RPM: DX1 S1i1: (+term11, -term10), RPM set: TPDO/XDi TPDO out can be activated from Output menu: RPM: 0x183 Byte 0 and 1 16b signed, 0.1 res.		See similar VS profile for VI001
5	VS05 Analog Set	Analogue Set Required: AX1 in Slot 1 RPM: TPDO/XDi RPM set: AX1 S1i2: 4-20mA (+term5, -term4) 4-20mA input lost below 3.5mA		See similar VS profile for VI001

VI 005

0...125

**Description :** 0...125 RPM

Propeller RPM 0...125
Actual RPM ± 3276 digital

All with set point

Status :**VI Notes :****VI-setup profiles (VS) for VI005**

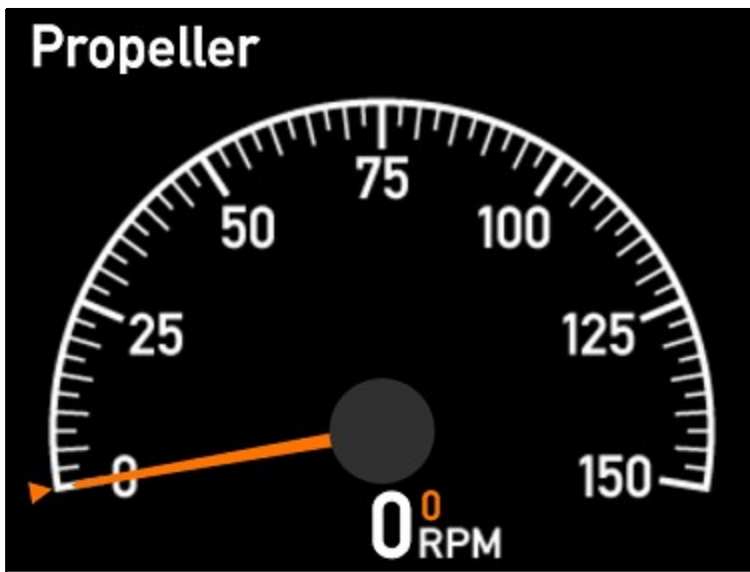
VS No.	Name	Description	Status	Notes
1	VS01 XDi-net	Input XDi-net RPM: XDi-net (0x3081:02) RPM set: XDi-net (0x3081:07)		See similar VS profile for VI001
2	VS02 TPDO	Input TPDO or XDi-net RPM: TPDO RPM set: TPDO		See similar VS profile for VI001

VI-setup profiles (VS) for VI005

VS No.	Name	Description	Status	Notes
3	VS03 Analog	Analogue Required: AX1 in Slot 1 RPM: AX1 S1i1: 4-20mA (+term9, -term8) RPM set: AX1 S1i2: 4-20mA (+term5, -term4) input lost below 3.5mA TPDO out can be activated from Output menu: RPM: 0x183 Byte 0 and 1 16b signed, 0.1 res.		See similar VS profile for VI001
4	VS04 RPM PU	RPM Pickup Required: DX1 in Slot 1 RPM: DX1 S1i1: (+term11, -term10), RPM set: TPDO/XDi TPDO out can be activated from Output menu: RPM: 0x183 Byte 0 and 1 16b signed, 0.1 res.		See similar VS profile for VI001
5	VS05 Analog Set	Analogue Set Required: AX1 in Slot 1 RPM: TPDO/XDi RPM set: AX1 S1i2: 4-20mA (+term5, -term4) 4-20mA input lost below 3.5mA		See similar VS profile for VI001

VI 006

0...150



Description : 0...150 RPM

Propeller RPM 0...150
Actual RPM ± 3276 digital

All with set point

Status :



VI Notes :

VI-setup profiles (VS) for VI006

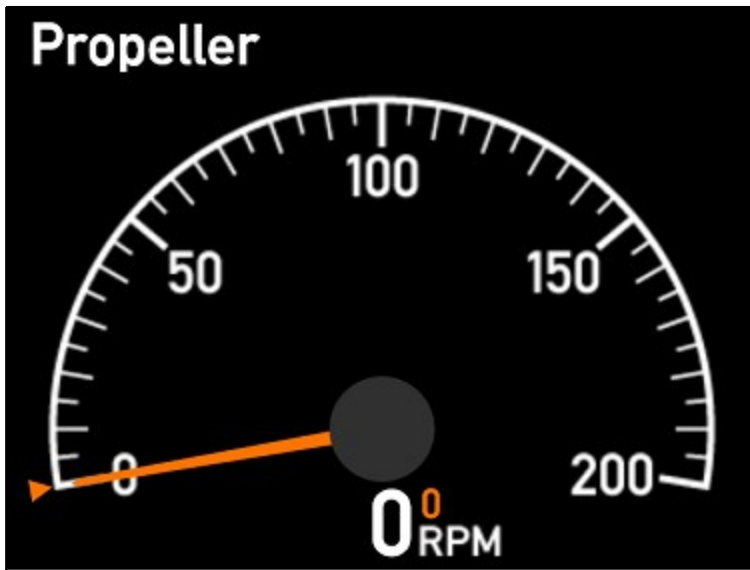
VS No.	Name	Description	Status	Notes
1	VS01 XDi-net	Input XDi-net RPM: XDi-net (0x3081:02) RPM set: XDi-net (0x3081:07)		See similar VS profile for VI001
2	VS02 TPDO	Input TPDO or XDi-net RPM: TPDO RPM set: TPDO		See similar VS profile for VI001

VI-setup profiles (VS) for VI006

VS No.	Name	Description	Status	Notes
3	VS03 Analog	Analogue Required: AX1 in Slot 1 RPM: AX1 S1i1: 4-20mA (+term9, -term8) RPM set: AX1 S1i2: 4-20mA (+term5, -term4) input lost below 3.5mA TPDO out can be activated from Output menu: RPM: 0x183 Byte 0 and 1 16b signed, 0.1 res.		See similar VS profile for VI001
4	VS04 RPM PU	RPM Pickup Required: DX1 in Slot 1 RPM: DX1 S1i1: (+term11, -term10), RPM set: TPDO/XDi TPDO out can be activated from Output menu: RPM: 0x183 Byte 0 and 1 16b signed, 0.1 res.		See similar VS profile for VI001
5	VS05 Analog Set	Analogue Set Required: AX1 in Slot 1 RPM: TPDO/XDi RPM set: AX1 S1i2: 4-20mA (+term5, -term4) 4-20mA input lost below 3.5mA		See similar VS profile for VI001

VI 007

0...200

**Description :** 0...200 RPM

Propeller RPM 0...200
Actual RPM ± 3276 digital

All with set point

Status :**VI Notes :****VI-setup profiles (VS) for VI007**

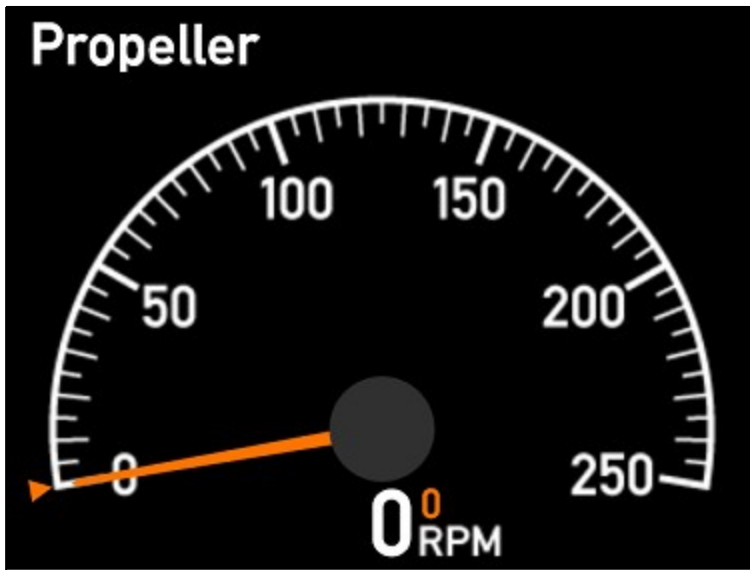
VS No.	Name	Description	Status	Notes
1	VS01 XDi-net	Input XDi-net RPM: XDi-net (0x3081:02) RPM set: XDi-net (0x3081:07)		See similar VS profile for VI001
2	VS02 TPDO	Input TPDO or XDi-net RPM: TPDO RPM set: TPDO		See similar VS profile for VI001

VI-setup profiles (VS) for VI007

VS No.	Name	Description	Status	Notes
3	VS03 Analog	Analogue Required: AX1 in Slot 1 RPM: AX1 S1i1: 4-20mA (+term9, -term8) RPM set: AX1 S1i2: 4-20mA (+term5, -term4) input lost below 3.5mA TPDO out can be activated from Output menu: RPM: 0x183 Byte 0 and 1 16b signed, 0.1 res.		See similar VS profile for VI001
4	VS04 RPM PU	RPM Pickup Required: DX1 in Slot 1 RPM: DX1 S1i1: (+term11, -term10), RPM set: TPDO/XDi TPDO out can be activated from Output menu: RPM: 0x183 Byte 0 and 1 16b signed, 0.1 res.		See similar VS profile for VI001
5	VS05 Analog Set	Analogue Set Required: AX1 in Slot 1 RPM: TPDO/XDi RPM set: AX1 S1i2: 4-20mA (+term5, -term4) 4-20mA input lost below 3.5mA		See similar VS profile for VI001

VI 008

0...250



Description : 0...250 RPM

Propeller RPM 0...250
Actual RPM ± 3276 digital

All with set point

Status :



VI Notes :

VI-setup profiles (VS) for VI008

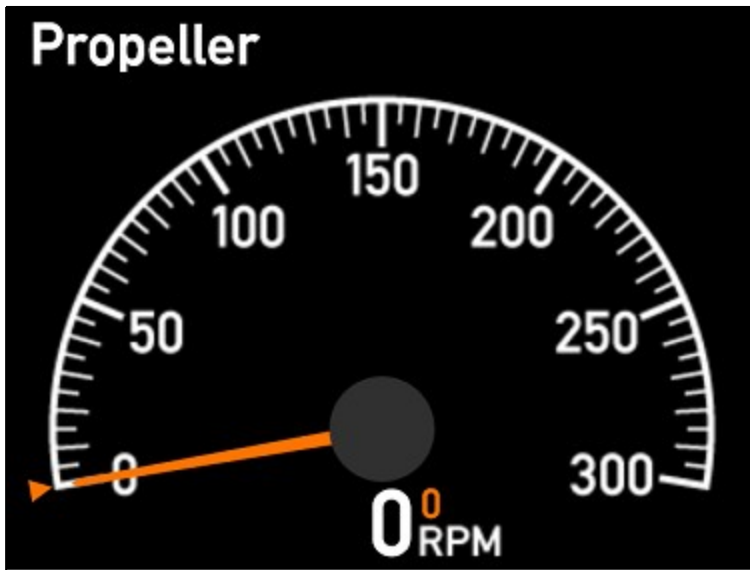
VS No.	Name	Description	Status	Notes
1	VS01 XDi-net	Input XDi-net RPM: XDi-net (0x3081:02) RPM set: XDi-net (0x3081:07)		See similar VS profile for VI001
2	VS02 TPDO	Input TPDO or XDi-net RPM: TPDO RPM set: TPDO		See similar VS profile for VI001

VI-setup profiles (VS) for VI008

VS No.	Name	Description	Status	Notes
3	VS03 Analog	Analogue Required: AX1 in Slot 1 RPM: AX1 S1i1: 4-20mA (+term9, -term8) RPM set: AX1 S1i2: 4-20mA (+term5, -term4) input lost below 3.5mA TPDO out can be activated from Output menu: RPM: 0x183 Byte 0 and 1 16b signed, 0.1 res.		See similar VS profile for VI001
4	VS04 RPM PU	RPM Pickup Required: DX1 in Slot 1 RPM: DX1 S1i1: (+term11, -term10), RPM set: TPDO/XDi TPDO out can be activated from Output menu: RPM: 0x183 Byte 0 and 1 16b signed, 0.1 res.		See similar VS profile for VI001
5	VS05 Analog Set	Analogue Set Required: AX1 in Slot 1 RPM: TPDO/XDi RPM set: AX1 S1i2: 4-20mA (+term5, -term4) 4-20mA input lost below 3.5mA		See similar VS profile for VI001

VI 009

0...300

**Description :** 0...300 RPM

Propeller RPM 0...300
Actual RPM ± 3276 digital

All with set point

Status :**VI Notes :****VI-setup profiles (VS) for VI009**

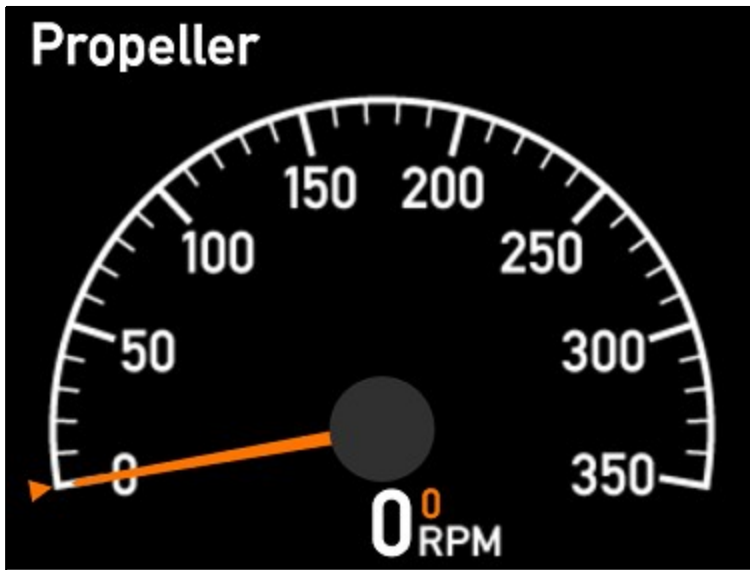
VS No.	Name	Description	Status	Notes
1	VS01 XDi-net	Input XDi-net RPM: XDi-net (0x3081:02) RPM set: XDi-net (0x3081:07)		See similar VS profile for VI001
2	VS02 TPDO	Input TPDO or XDi-net RPM: TPDO RPM set: TPDO		See similar VS profile for VI001

VI-setup profiles (VS) for VI009

VS No.	Name	Description	Status	Notes
3	VS03 Analog	Analogue Required: AX1 in Slot 1 RPM: AX1 S1i1: 4-20mA (+term9, -term8) RPM set: AX1 S1i2: 4-20mA (+term5, -term4) input lost below 3.5mA TPDO out can be activated from Output menu: RPM: 0x183 Byte 0 and 1 16b signed, 0.1 res.		See similar VS profile for VI001
4	VS04 RPM PU	RPM Pickup Required: DX1 in Slot 1 RPM: DX1 S1i1: (+term11, -term10), RPM set: TPDO/XDi TPDO out can be activated from Output menu: RPM: 0x183 Byte 0 and 1 16b signed, 0.1 res.		See similar VS profile for VI001
5	VS05 Analog Set	Analogue Set Required: AX1 in Slot 1 RPM: TPDO/XDi RPM set: AX1 S1i2: 4-20mA (+term5, -term4) 4-20mA input lost below 3.5mA		See similar VS profile for VI001

VI 010

0...350

**Description :** 0...350 RPM

Propeller RPM 0...350
Actual RPM ± 3276 digital

All with set point

Status :**VI Notes :****VI-setup profiles (VS) for VI010**

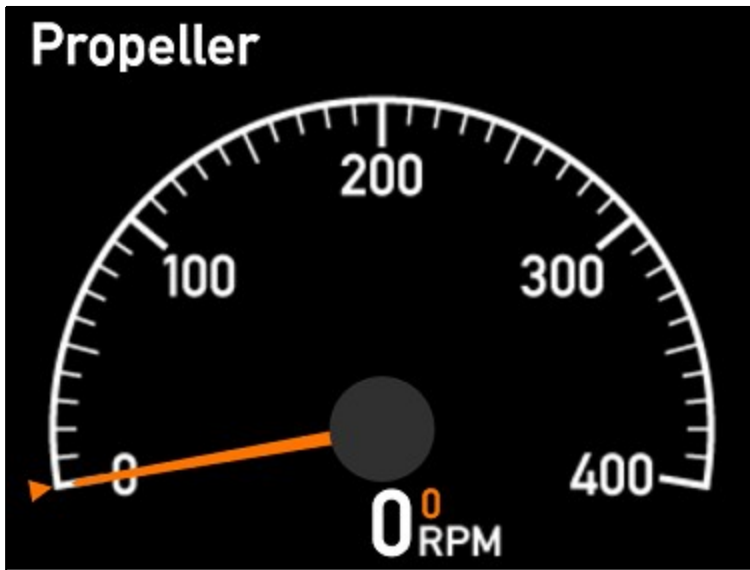
VS No.	Name	Description	Status	Notes
1	VS01 XDi-net	Input XDi-net RPM: XDi-net (0x3081:02) RPM set: XDi-net (0x3081:07)		See similar VS profile for VI001
2	VS02 TPDO	Input TPDO or XDi-net RPM: TPDO RPM set: TPDO		See similar VS profile for VI001

VI-setup profiles (VS) for VI010

VS No.	Name	Description	Status	Notes
3	VS03 Analog	Analogue Required: AX1 in Slot 1 RPM: AX1 S1i1: 4-20mA (+term9, -term8) RPM set: AX1 S1i2: 4-20mA (+term5, -term4) input lost below 3.5mA TPDO out can be activated from Output menu: RPM: 0x183 Byte 0 and 1 16b signed, 0.1 res.		See similar VS profile for VI001
4	VS04 RPM PU	RPM Pickup Required: DX1 in Slot 1 RPM: DX1 S1i1: (+term11, -term10), RPM set: TPDO/XDi TPDO out can be activated from Output menu: RPM: 0x183 Byte 0 and 1 16b signed, 0.1 res.		See similar VS profile for VI001
5	VS05 Analog Set	Analogue Set Required: AX1 in Slot 1 RPM: TPDO/XDi RPM set: AX1 S1i2: 4-20mA (+term5, -term4) 4-20mA input lost below 3.5mA		See similar VS profile for VI001

VI 011

0...400



Description : 0...400 RPM

Propeller RPM 0...400
Actual RPM ± 3276 digital

All with set point

Status :



VI Notes :

VI-setup profiles (VS) for VI011

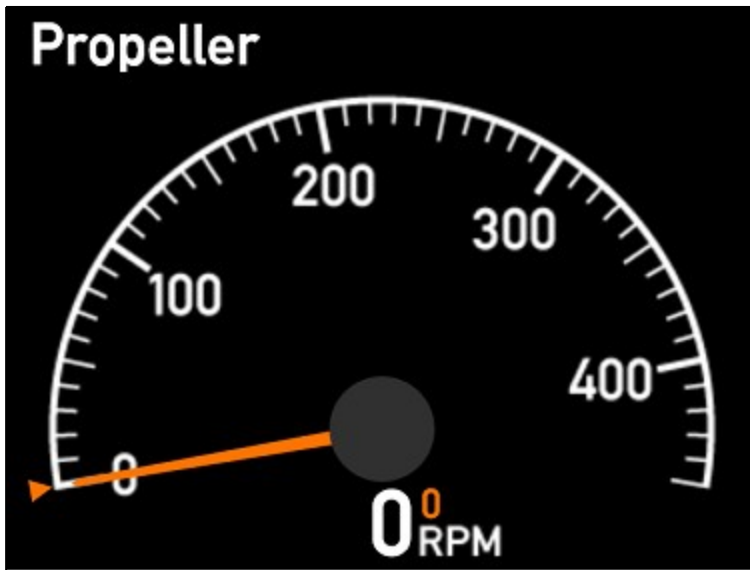
VS No.	Name	Description	Status	Notes
1	VS01 XDi-net	Input XDi-net RPM: XDi-net (0x3081:02) RPM set: XDi-net (0x3081:07)		See similar VS profile for VI001
2	VS02 TPDO	Input TPDO or XDi-net RPM: TPDO RPM set: TPDO		See similar VS profile for VI001

VI-setup profiles (VS) for VI011

VS No.	Name	Description	Status	Notes
3	VS03 Analog	Analogue Required: AX1 in Slot 1 RPM: AX1 S1i1: 4-20mA (+term9, -term8) RPM set: AX1 S1i2: 4-20mA (+term5, -term4) input lost below 3.5mA TPDO out can be activated from Output menu: RPM: 0x183 Byte 0 and 1 16b signed, 0.1 res.		See similar VS profile for VI001
4	VS04 RPM PU	RPM Pickup Required: DX1 in Slot 1 RPM: DX1 S1i1: (+term11, -term10), RPM set: TPDO/XDi TPDO out can be activated from Output menu: RPM: 0x183 Byte 0 and 1 16b signed, 0.1 res.		See similar VS profile for VI001
5	VS05 Analog Set	Analogue Set Required: AX1 in Slot 1 RPM: TPDO/XDi RPM set: AX1 S1i2: 4-20mA (+term5, -term4) 4-20mA input lost below 3.5mA		See similar VS profile for VI001

VI 012

0...450



Description : 0...450 RPM

Propeller RPM 0...450
Actual RPM ± 3276 digital

All with set point

Status :



VI Notes :

VI-setup profiles (VS) for VI012

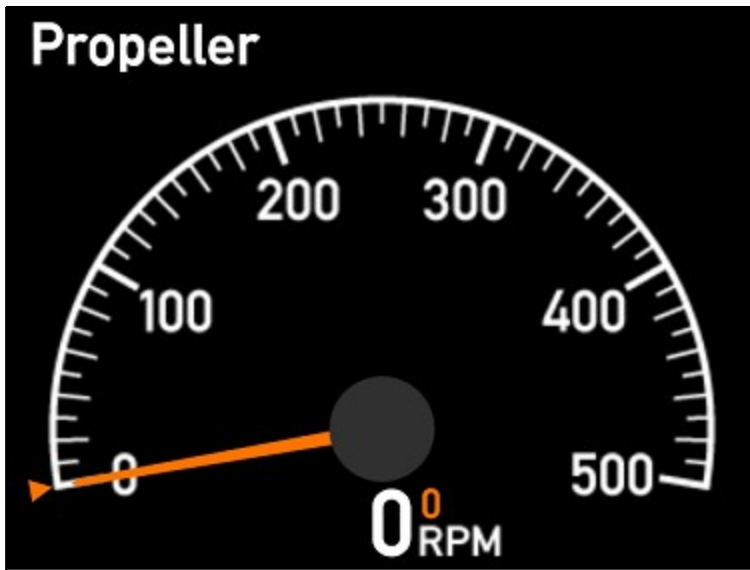
VS No.	Name	Description	Status	Notes
1	VS01 XDi-net	Input XDi-net RPM: XDi-net (0x3081:02) RPM set: XDi-net (0x3081:07)		See similar VS profile for VI001
2	VS02 TPDO	Input TPDO or XDi-net RPM: TPDO RPM set: TPDO		See similar VS profile for VI001

VI-setup profiles (VS) for VI012

VS No.	Name	Description	Status	Notes
3	VS03 Analog	Analogue Required: AX1 in Slot 1 RPM: AX1 S1i1: 4-20mA (+term9, -term8) RPM set: AX1 S1i2: 4-20mA (+term5, -term4) input lost below 3.5mA TPDO out can be activated from Output menu: RPM: 0x183 Byte 0 and 1 16b signed, 0.1 res.		See similar VS profile for VI001
4	VS04 RPM PU	RPM Pickup Required: DX1 in Slot 1 RPM: DX1 S1i1: (+term11, -term10), RPM set: TPDO/XDi TPDO out can be activated from Output menu: RPM: 0x183 Byte 0 and 1 16b signed, 0.1 res.		See similar VS profile for VI001
5	VS05 Analog Set	Analogue Set Required: AX1 in Slot 1 RPM: TPDO/XDi RPM set: AX1 S1i2: 4-20mA (+term5, -term4) 4-20mA input lost below 3.5mA		See similar VS profile for VI001

VI 013

0...500



Description : 0...500 RPM

Propeller RPM 0...500
Actual RPM ± 3276 digital

All with set point

Status :



VI Notes :

VI-setup profiles (VS) for VI013

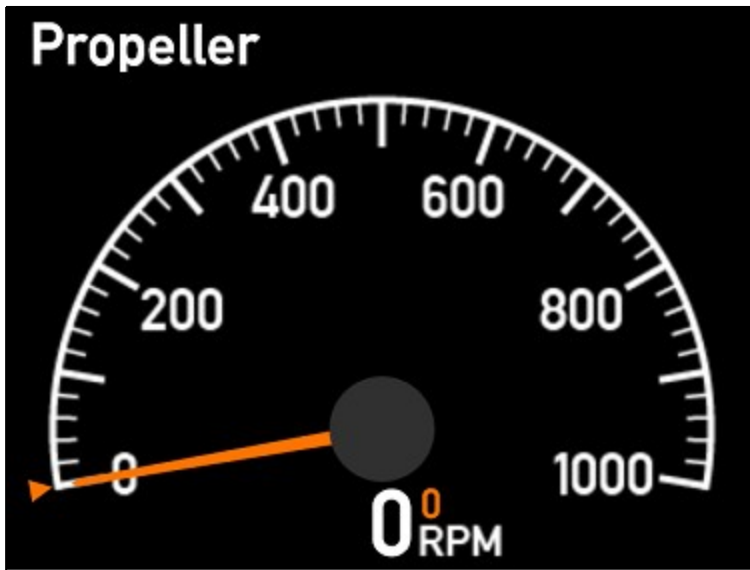
VS No.	Name	Description	Status	Notes
1	VS01 XDi-net	Input XDi-net RPM: XDi-net (0x3081:02) RPM set: XDi-net (0x3081:07)		See similar VS profile for VI001
2	VS02 TPDO	Input TPDO or XDi-net RPM: TPDO RPM set: TPDO		See similar VS profile for VI001

VI-setup profiles (VS) for VI013

VS No.	Name	Description	Status	Notes
3	VS03 Analog	Analogue Required: AX1 in Slot 1 RPM: AX1 S1i1: 4-20mA (+term9, -term8) RPM set: AX1 S1i2: 4-20mA (+term5, -term4) input lost below 3.5mA TPDO out can be activated from Output menu: RPM: 0x183 Byte 0 and 1 16b signed, 0.1 res.		See similar VS profile for VI001
4	VS04 RPM PU	RPM Pickup Required: DX1 in Slot 1 RPM: DX1 S1i1: (+term11, -term10), RPM set: TPDO/XDi TPDO out can be activated from Output menu: RPM: 0x183 Byte 0 and 1 16b signed, 0.1 res.		See similar VS profile for VI001
5	VS05 Analog Set	Analogue Set Required: AX1 in Slot 1 RPM: TPDO/XDi RPM set: AX1 S1i2: 4-20mA (+term5, -term4) 4-20mA input lost below 3.5mA		See similar VS profile for VI001

VI 014

0...1000

**Description :** 0...1000 RPM

Propeller RPM 0...1000
Actual RPM ± 3276 digital

With set point

Status :**VI Notes :****VI-setup profiles (VS) for VI014**

VS No.	Name	Description	Status	Notes
1	VS01 XDi-net	Input XDi-net RPM: XDi-net (0x3081:02) RPM set: XDi-net (0x3081:07)		See similar VS profile for VI001
2	VS02 TPDO	Input TPDO or XDi-net RPM: TPDO RPM set: TPDO		See similar VS profile for VI001

VI-setup profiles (VS) for VI014

VS No.	Name	Description	Status	Notes
3	VS03 Analog	Analogue Required: AX1 in Slot 1 RPM: AX1 S1i1: 4-20mA (+term9, -term8) RPM set: AX1 S1i2: 4-20mA (+term5, -term4) input lost below 3.5mA TPDO out can be activated from Output menu: RPM: 0x183 Byte 0 and 1 16b signed, 0.1 res.		See similar VS profile for VI001
4	VS04 RPM PU	RPM Pickup Required: DX1 in Slot 1 RPM: DX1 S1i1: (+term11, -term10), RPM set: TPDO/XDi TPDO out can be activated from Output menu: RPM: 0x183 Byte 0 and 1 16b signed, 0.1 res.		See similar VS profile for VI001
5	VS05 Analog Set	Analogue Set Required: AX1 in Slot 1 RPM: TPDO/XDi RPM set: AX1 S1i2: 4-20mA (+term5, -term4) 4-20mA input lost below 3.5mA		See similar VS profile for VI001

VI 015

0...1250

**Description :** 0...1250 RPM

Propeller RPM 0...1250
Actual RPM ± 3276 digital

All with set point

Status :**VI Notes :****VI-setup profiles (VS) for VI015**

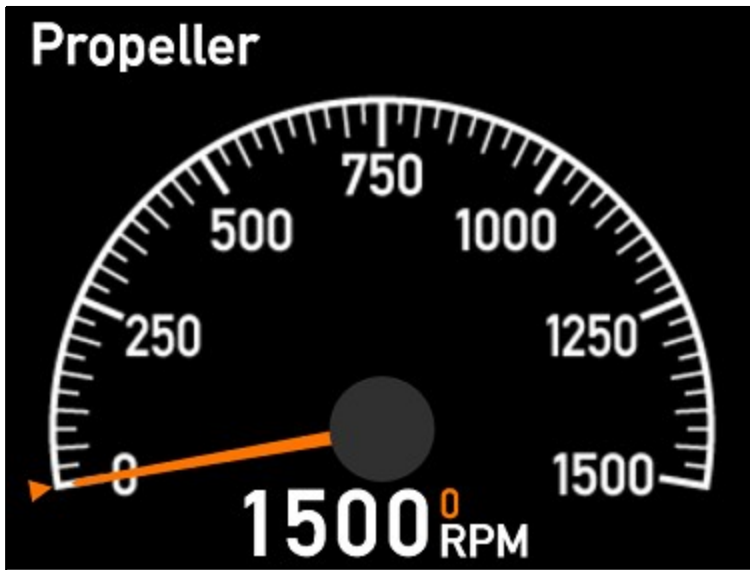
VS No.	Name	Description	Status	Notes
1	VS01 XDi-net	Input XDi-net RPM: XDi-net (0x3081:02) RPM set: XDi-net (0x3081:07)		See similar VS profile for VI001
2	VS02 TPDO	Input TPDO or XDi-net RPM: TPDO RPM set: TPDO		See similar VS profile for VI001

VI-setup profiles (VS) for VI015

VS No.	Name	Description	Status	Notes
3	VS03 Analog	Analogue Required: AX1 in Slot 1 RPM: AX1 S1i1: 4-20mA (+term9, -term8) RPM set: AX1 S1i2: 4-20mA (+term5, -term4) input lost below 3.5mA TPDO out can be activated from Output menu: RPM: 0x183 Byte 0 and 1 16b signed, 0.1 res.		See similar VS profile for VI001
4	VS04 RPM PU	RPM Pickup Required: DX1 in Slot 1 RPM: DX1 S1i1: (+term11, -term10), RPM set: TPDO/XDi TPDO out can be activated from Output menu: RPM: 0x183 Byte 0 and 1 16b signed, 0.1 res.		See similar VS profile for VI001
5	VS05 Analog Set	Analogue Set Required: AX1 in Slot 1 RPM: TPDO/XDi RPM set: AX1 S1i2: 4-20mA (+term5, -term4) 4-20mA input lost below 3.5mA		See similar VS profile for VI001

VI 016

0...1500

**Description :** 0...1500 RPM

Propeller RPM 0...1500
Actual RPM ± 3276 digital

All with set point

Status :**VI Notes :****VI-setup profiles (VS) for VI016**

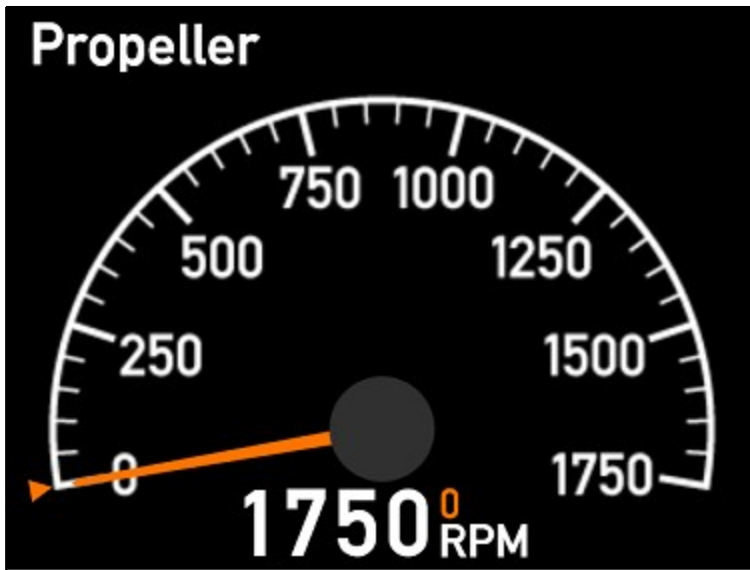
VS No.	Name	Description	Status	Notes
1	VS01 XDi-net	Input XDi-net RPM: XDi-net (0x3081:02) RPM set: XDi-net (0x3081:07)		See similar VS profile for VI001
2	VS02 TPDO	Input TPDO or XDi-net RPM: TPDO RPM set: TPDO		See similar VS profile for VI001

VI-setup profiles (VS) for VI016

VS No.	Name	Description	Status	Notes
3	VS03 Analog	Analogue Required: AX1 in Slot 1 RPM: AX1 S1i1: 4-20mA (+term9, -term8) RPM set: AX1 S1i2: 4-20mA (+term5, -term4) input lost below 3.5mA TPDO out can be activated from Output menu: RPM: 0x183 Byte 0 and 1 16b signed, 0.1 res.		See similar VS profile for VI001
4	VS04 RPM PU	RPM Pickup Required: DX1 in Slot 1 RPM: DX1 S1i1: (+term11, -term10), RPM set: TPDO/XDi TPDO out can be activated from Output menu: RPM: 0x183 Byte 0 and 1 16b signed, 0.1 res.		See similar VS profile for VI001
5	VS05 Analog Set	Analogue Set Required: AX1 in Slot 1 RPM: TPDO/XDi RPM set: AX1 S1i2: 4-20mA (+term5, -term4) 4-20mA input lost below 3.5mA		See similar VS profile for VI001

VI 017

0...1750



Description : 0...1750 RPM

Propeller RPM 0...1750
Actual RPM ± 3276 digital

All with set point

Status :



VI Notes :

VI-setup profiles (VS) for VI017

VS No.	Name	Description	Status	Notes
1	VS01 XDi-net	Input XDi-net RPM: XDi-net (0x3081:02) RPM set: XDi-net (0x3081:07)		See similar VS profile for VI001
2	VS02 TPDO	Input TPDO or XDi-net RPM: TPDO RPM set: TPDO		See similar VS profile for VI001

VI-setup profiles (VS) for VI017

VS No.	Name	Description	Status	Notes
3	VS03 Analog	Analogue Required: AX1 in Slot 1 RPM: AX1 S1i1: 4-20mA (+term9, -term8) RPM set: AX1 S1i2: 4-20mA (+term5, -term4) input lost below 3.5mA TPDO out can be activated from Output menu: RPM: 0x183 Byte 0 and 1 16b signed, 0.1 res.		See similar VS profile for VI001
4	VS04 RPM PU	RPM Pickup Required: DX1 in Slot 1 RPM: DX1 S1i1: (+term11, -term10), RPM set: TPDO/XDi TPDO out can be activated from Output menu: RPM: 0x183 Byte 0 and 1 16b signed, 0.1 res.		See similar VS profile for VI001
5	VS05 Analog Set	Analogue Set Required: AX1 in Slot 1 RPM: TPDO/XDi RPM set: AX1 S1i2: 4-20mA (+term5, -term4) 4-20mA input lost below 3.5mA		See similar VS profile for VI001

VI 018

0...2000



Description : 0...2000 RPM

Propeller RPM 0...2000
Actual RPM ± 3276 digital

All with set point

Status :



VI Notes :

VI-setup profiles (VS) for VI018

VS No.	Name	Description	Status	Notes
1	VS01 XDi-net	Input XDi-net RPM: XDi-net (0x3081:02) RPM set: XDi-net (0x3081:07)		See similar VS profile for VI001
2	VS02 TPDO	Input TPDO or XDi-net RPM: TPDO RPM set: TPDO		See similar VS profile for VI001

VI-setup profiles (VS) for VI018

VS No.	Name	Description	Status	Notes
3	VS03 Analog	Analogue Required: AX1 in Slot 1 RPM: AX1 S1i1: 4-20mA (+term9, -term8) RPM set: AX1 S1i2: 4-20mA (+term5, -term4) input lost below 3.5mA TPDO out can be activated from Output menu: RPM: 0x183 Byte 0 and 1 16b signed, 0.1 res.		See similar VS profile for VI001
4	VS04 RPM PU	RPM Pickup Required: DX1 in Slot 1 RPM: DX1 S1i1: (+term11, -term10), RPM set: TPDO/XDi TPDO out can be activated from Output menu: RPM: 0x183 Byte 0 and 1 16b signed, 0.1 res.		See similar VS profile for VI001
5	VS05 Analog Set	Analogue Set Required: AX1 in Slot 1 RPM: TPDO/XDi RPM set: AX1 S1i2: 4-20mA (+term5, -term4) 4-20mA input lost below 3.5mA		See similar VS profile for VI001

VI 019

0...2500

**Description :** 0...2500 RPM

Propeller RPM 0...2500
Actual RPM ± 3276 digital
With set point

Status :**VI Notes :****VI-setup profiles (VS) for VI019**

VS No.	Name	Description	Status	Notes
1	VS01 XDi-net	Input XDi-net RPM: XDi-net (0x3081:02) RPM set: XDi-net (0x3081:07)		
2	VS02 TPDO	Input TPDO or XDi-net RPM: TPDO RPM set: TPDO		

VI-setup profiles (VS) for VI019

VS No.	Name	Description	Status	Notes
3	VS03 Analog	Analogue Required: AX1 in Slot 1 RPM: AX1 S1i1: 4-20mA (+term9, -term8) RPM set: AX1 S1i2: 4-20mA (+term5, -term4) input lost below 3.5mA TPDO out can be activated from Output menu: RPM: 0x183 Byte 0 and 1 16b signed, 0.1 res.		
4	VS04 RPM PU	RPM Pickup Required: DX1 in Slot 1 RPM: DX1 S1i1: (+term11, -term10), Default: 1000pulses per 100 revolutions (10pulses/rev.) RPM set: TPDO/XDi TPDO out can be activated from Output menu: RPM: 0x183 Byte 0 and 1 16b signed, 0.1 res.		
5	VS05 Analog Set	Analogue Set Required: AX1 in Slot 1 RPM: TPDO/XDi RPM set: AX1 S1i2: 4-20mA (+term5, -term4) 4-20mA input lost below 3.5mA		