

MVR-V211



Busbar protection

Data sheet

4921240678-C



Improve
Tomorrow

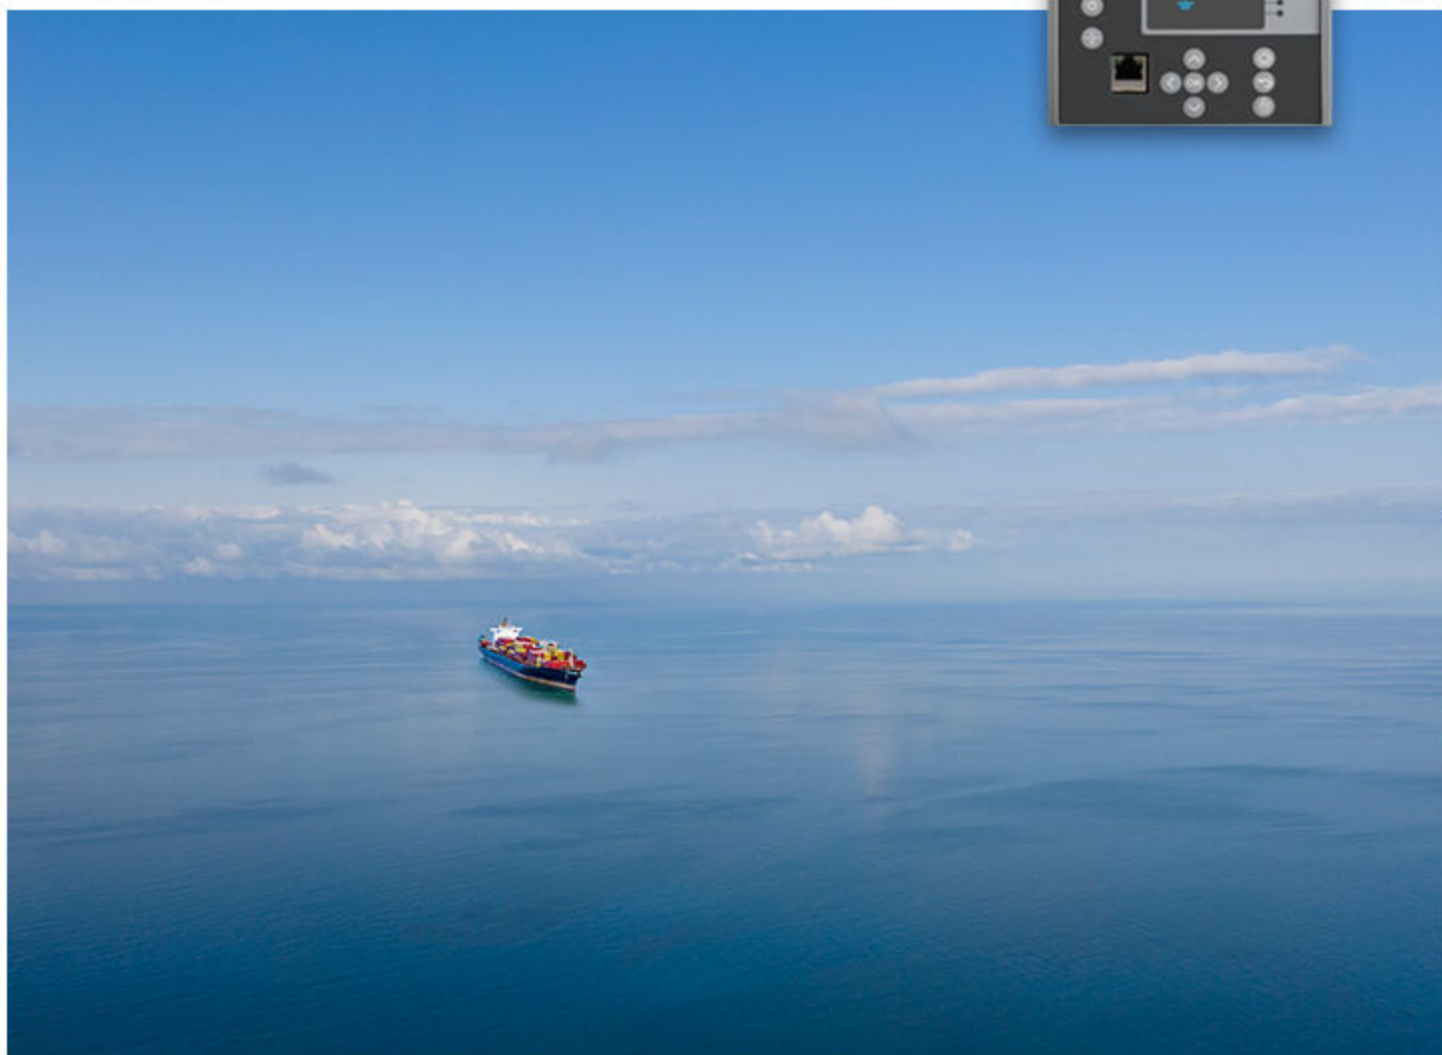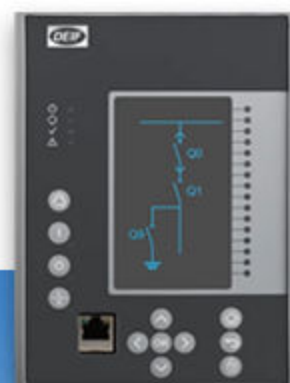

1. Product description

1.1 About.....	4
1.2 Applications.....	4
1.3 Features.....	5

2. Protections

2.1 Voltage protections.....	6
2.1.1 Undervoltage protection ($U < 27$).....	6
2.1.2 Overvoltage protection ($U > 59$).....	7
2.1.3 Neutral overvoltage protection ($U_0 > 59N$).....	7
2.1.4 Sequence voltage protection ($U_1/U_2 > / < 47/27P/59NP$).....	8
2.1.5 Vector jump ($\Delta\phi$; 78).....	9
2.2 Frequency protections.....	10
2.2.1 Overfrequency and underfrequency protection ($f > / < 81O/81U$).....	10
2.2.2 Rate-of-change of frequency protection ($df/dt > / < 81R$).....	10
2.3 Control functions.....	11
2.3.1 Synchrocheck ($\Delta V/\Delta a/\Delta f$; 25).....	11
2.3.2 Object control and monitoring.....	12
2.3.3 Programmable stage ($PSx > / < 99$).....	12
2.3.4 Indicator object monitoring.....	13
2.3.5 Setting group selection.....	13
2.4 Monitoring functions.....	13
2.4.1 Voltage transformer supervision (60).....	13
2.4.2 Disturbance recorder.....	14
2.4.3 Voltage memory.....	14

3. Technical specifications

3.1 Electromagnetic compatibility.....	16
3.2 Mechanical durability.....	17
3.3 Environment.....	18
3.4 Safety.....	18

4. Hardware

4.1 Processor and power supply.....	20
4.1.1 Auxiliary supply.....	20
4.1.2 Isolated digital inputs.....	21
4.1.3 Digital outputs.....	21
4.1.4 Communication ports.....	22
4.2 Voltage measurement module.....	22
4.3 Frequency measurement.....	23
4.4 Digital inputs and outputs.....	23
4.4.1 Digital input module (option card B)	23
4.4.2 Digital output module (option card C).....	24
4.5 Analogue inputs.....	24
4.5.1 RTD input module (option card F).....	24
4.6 Analogue outputs.....	25
4.6.1 Analogue output module (mA out & mA in) (option card I).....	25
4.7 Additional communication options.....	25
4.7.1 Double RJ45 Ethernet & IIRIG-B communication module (option card G).....	25
4.7.2 Double ST 100 Mbps Ethernet communication module (option card H).....	26
4.7.3 Double LC 100 Mbps Ethernet communication module (option card J).....	26

4.7.4 Double RJ-45 (HSR, PRP) Ethernet communication module (option card K).....	26
4.7.5 RS-232 & serial fiber communication module (option cards L to O).....	27
4.8 MVR-21x display.....	27
4.8.1 Display.....	27
4.9 Folios and configuration.....	28
4.10 Mechanical specifications.....	28
4.11 Environment.....	29
4.12 Safety.....	29
4.13 Dimensions.....	29
5. Ordering information	
5.1 MVR Ordering.....	30
5.2.1 Disclaimer.....	31
5.2.2 Copyright.....	31

1. Product description

1.1 About

The MVR-V211 busbar protection relay is a modular voltage protection solution for substations. The relay includes both voltage and frequency protections as well as powerful logic programming. You can add up to 5 I/O or communication modules. All this makes the MVR-V211 optimal for demanding load shedding and automatic transfer applications. MVR-V211 communicates using various protocols, including the IEC 61850.

1.2 Applications


A wiring example and key ANSI functions are shown below.



More information

See the **Protections** chapter for a full list of the protections.

Busbar protection wiring (V211)

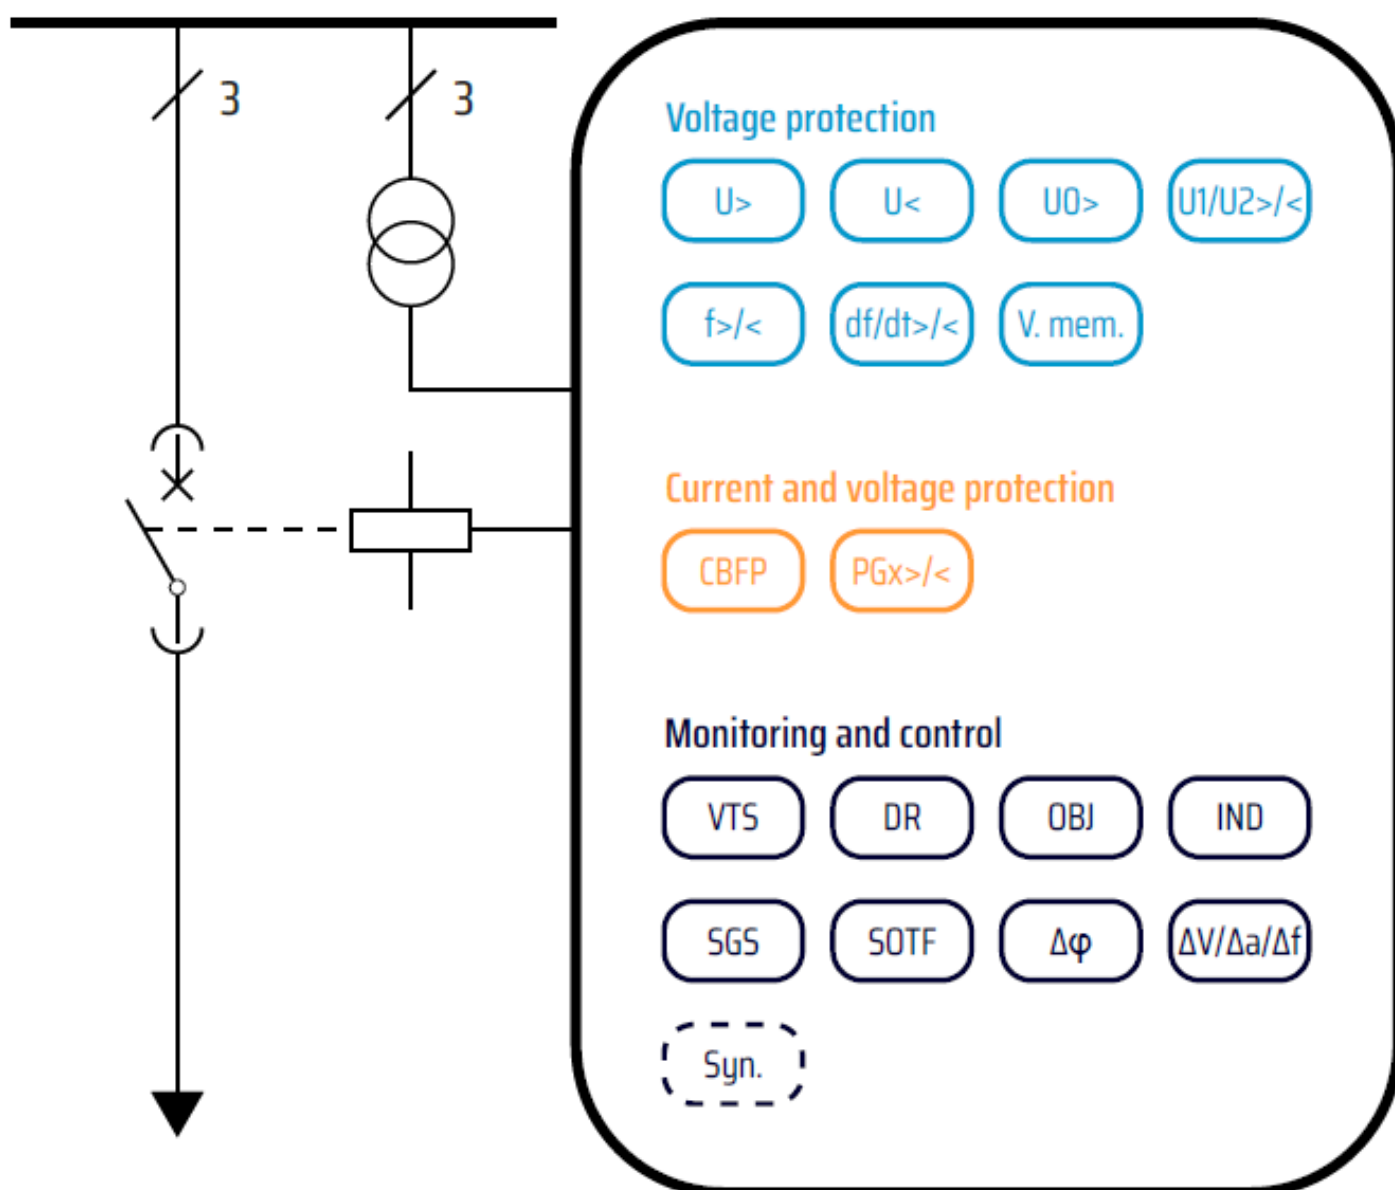

1.3 Features

	Functions
High performance, good usability	• Full protection for lines • Bay control, alarm, measurement and monitoring • Large customisable HMI with configurable Mimic diagram • Configurable LEDs • Large flash memory for events, logs, recordings and documentation ◦ 15,000 events and 100 disturbance recordings • Easy-to-use and powerful MVR Utility Software for setting, configuration and analysing • Full set of communication protocols, including IEC 61850
Versatile protection design	• Fast, versatile and dependable protection functions over a wide frequency range (6 to 75 Hz) • Suitable for the most demanding protection applications
Modularity	• Fully modular hardware construction • Plug in more I/O or communication cards to meet the application requirements
Usability	• Sophisticated setting aids • Highly customisable HMI • Storage of PDF or other supportive documents • Extensive user log information ◦ Setting changes ◦ Other operational history
Performance	• Sub-cycle instantaneous trip times • Logics editor for ladder logic functionality • Up to 100 disturbance records, of up to 10 seconds each • 10,000 events stored in non-volatile memory
Savings in engineering time	• MVR Utility Software free-of-charge software suite with an intuitive and easy-to-use human-machine interface • Download all relay settings instantly using native 100 Mb/s Ethernet connection (front port or rear port)
Standardised hardware	• Standardised hardware design, for simpler logistics and stock management • Five CT inputs with configurable secondary currents • Configurable digital input voltage thresholds
Communication	• Native Ethernet communication • A variety of standard protocols including the IEC 61850 substation communication standard with fast GOOSE messaging
IEC 61850 & IEEE 1588	• High-availability Seamless Redundancy (HSR) support • Parallel Redundancy Protocol (PRP) support • Precision Time Protocol (PTP) according to IEEE 1588

2. Protections

2.1 Voltage protections

2.1.1 Undervoltage protection ($U < 27$)

Table 2.1 Technical data for the undervoltage function

Measurement inputs	
Voltage inputs	U_{L1}, U_{L2}, U_{L3} $U_{L12}, U_{L23}, U_{L31} (+ U_0)$
Voltage input magnitudes	RMS line-to-line or line-to-neutral voltages
Pick-up	
Pick-up terms	1 voltage 2 voltages 3 voltages
Pick-up setting	0.00...120.00 % U_N , setting step 0.01 % U_N
Inaccuracy: - Voltage	± 1.5 % U_{SET} or ± 30 mV
Low voltage block	
Pick-up setting	0.00...80.00 % U_N , setting step 0.01 % U_N
Inaccuracy: - Voltage	± 1.5 % U_{SET} or ± 30 mV
Operation time	
Definite time function operating time setting	0.00...1800.00 s, setting step 0.005 s
Inaccuracy: - Definite time (U_M/U_{SET} ratio 1.05 $\rightarrow$)	± 1.0 % or ± 35 ms
IDMT setting parameters:	
k Time dial setting for IDMT	0.01...25.00, step 0.01
A IDMT constant	0...250.0000, step 0.0001
B IDMT constant	0...5.0000, step 0.0001
C IDMT constant	0...250.0000, step 0.0001
Inaccuracy: - IDMT operating time - IDMT minimum operating time	± 1.5 % or ± 20 ms ± 20 ms
Instant operation time	
Start time and instant operation time (trip): - U_M/U_{SET} ratio 1.05 $\rightarrow$	<65 ms
Retardation time (overshoot)	<30 ms
Reset	
Reset ratio	103 % of the pick-up voltage setting
Reset time setting	0.010...10.000 s, step 0.005 s
Inaccuracy: Reset time	± 1.0 % or ± 45 ms
Instant reset time and start-up reset	<50 ms

NOTE The low-voltage block is not in use when its pick-up setting is set to 0 %. The undervoltage function trip signal is active when the LV block is disabled and the device has no voltage injection.

NOTE After the low voltage blocking condition, the undervoltage stage does not trip unless the voltage exceeds the pick-up setting first.

2.1.2 Overvoltage protection ($U_{>}$; 59)

Table 2.2 Technical data for the overvoltage function

Measurement inputs	
Voltage inputs	U_{L1}, U_{L2}, U_{L3} $U_{L12}, U_{L23}, U_{L31} (+ U_0)$
Voltage input magnitudes	RMS line-to-line or line-to-neutral voltages
Pick-up	
Pick-up terms	1 voltage 2 voltages 3 voltages
Pick-up setting	50.00...150.00 % U_N , setting step 0.01 % U_N
Inaccuracy: - Voltage	± 1.5 % U_{SET}
Operating time	
Definite time function operating time setting	0.00...1800.00 s, setting step 0.005 s
Inaccuracy: - Definite time (U_M/U_{SET} ratio 1.05→)	± 1.0 % or ± 35 ms
IDMT setting parameters:	
k Time dial setting for IDMT	0.01...25.00, step 0.01
A IDMT constant	0...250.0000, step 0.0001
B IDMT constant	0...5.0000, step 0.0001
C IDMT constant	0...250.0000, step 0.0001
Inaccuracy: - IDMT operating time - IDMT minimum operating time	± 1.5 % or ± 20 ms ± 20 ms
Instant operation time	
Start time and instant operation time (trip): - U_M/U_{SET} ratio 1.05→	<50 ms
Reset	
Reset ratio	97 % of the pick-up voltage setting
Reset time setting	0.010...10.000 s, step 0.005 s
Inaccuracy: Reset time	± 1.0 % or ± 45 ms
Instant reset time and start-up reset	<50 ms

2.1.3 Neutral overvoltage protection ($U_{0>}$; 59N)

Table 2.3 Technical data for the neutral overvoltage function

Measurement inputs	
Voltage input (selectable)	Residual voltage from U3 or U4 voltage channel Residual voltage calculated from U_{L1}, U_{L2}, U_{L3}
Voltage input magnitudes	RMS residual voltage U_0 Calculated RMS residual voltage U_0
Pick-up	

Pick-up voltage setting	1.00...50.00 % U_{0N} , setting step $0.01 \times I_N$
Inaccuracy:	
- Voltage U_0	$\pm 1.5 \% U_{0SET}$ or ± 30 mV
- Voltage U_{0Calc}	± 150 mV
Operation time	
Definite time function operating time setting	0.00...1800.00 s, setting step 0.005 s
Inaccuracy:	
- Definite time (U_{0M}/U_{0SET} ratio 1.05→)	$\pm 1.0 \%$ or ± 45 ms
IDMT setting parameters:	
k Time dial setting for IDMT	0.01...25.00, step 0.01
A IDMT constant	0...250.0000, step 0.0001
B IDMT constant	0...5.0000, step 0.0001
C IDMT constant	0...250.0000, step 0.0001
Inaccuracy:	
- IDMT operating time	$\pm 1.5 \%$ or ± 20 ms
- IDMT minimum operating time	± 20 ms
Instant operation time	
Start time and instant operation time (trip):	
- U_{0M}/U_{0SET} ratio 1.05→	<50 ms
Reset	
Reset ratio	97 % of the pick-up voltage setting
Reset time setting	0.000 ... 150.000 s, step 0.005 s
Inaccuracy: Reset time	$\pm 1.0 \%$ or ± 50 ms
Instant reset time and start-up reset	<50 ms

2.1.4 Sequence voltage protection ($U_1/U_2>/<; 47/27P/59NP$)

Table 2.4 Technical data for the sequence voltage function

Measurement inputs	
Voltage inputs	U_{L1}, U_{L2}, U_{L3} $U_{L12}, U_{L23}, U_{L31}$ (+ U_0)
Voltage input calculations	Positive sequence voltage (I1) Negative sequence voltage (I2)
Pick-up	
Pick-up setting	5.00...150.00 % U_N , setting step 0.01 % U_N
Inaccuracy:	
- Voltage	$\pm 1.5 \% U_{SET}$ or ± 30 mV
Low voltage block	
Pick-up setting	1.00...80.00 % U_N , setting step 0.01 % U_N
Inaccuracy:	
-Voltage	$\pm 1.5 \% U_{SET}$ or ± 30 mV
Operation time	
Definite time function operating time setting	0.00...1800.00 s, setting step 0.005 s
Inaccuracy	
-Definite Time (U_M/U_{SET} ratio 1.05→)	$\pm 1.0 \%$ or ± 35 ms
IDMT setting parameters:	

k	Time dial setting for IDMT	0.01...25.00, step 0.01
A	IDMT constant	0...250.0000, step 0.0001
B	IDMT constant	0...5.0000, step 0.0001
C	IDMT constant	0...250.0000, step 0.0001
Inaccuracy:		
-	IDMT operating time	±1.5 % or ±20 ms
-	IDMT minimum operating time	±20 ms
Instant operation time		
Start time and instant operation time (trip):		<65 ms
-	U_M/U_{SET} ratio <0.95/1.05→	
Reset		
Reset ratio		97 or 103 % of the pick-up voltage setting
Reset time setting		0.010...10.000 s, step 0.005 s
Inaccuracy: Reset time		±1.0 % or ±35 ms
Instant reset time and start-up reset		<50 ms

2.1.5 Vector jump ($\Delta\phi$; 78)

Table 2.5 Technical data for the vector jump protection function

Measurement inputs		
Voltage inputs		U_{L1}, U_{L2}, U_{L3} $U_{L12}, U_{L23}, U_{L31} + U_0$
Monitored voltages		Any or all system line-to-line voltage(s) Any or all system line-to-neutral voltage(s) Specifically chosen line-to-line or line-to-neutral voltage U4 channel voltage
Pick-up		
Pick-up setting		0.05...30.00°, setting step 0.01°
Inaccuracy:		
-	Voltage angle	±30% overreach or 1.00 °
Low-voltage blocking		
Pick-up setting		0.01...100.00 % U_N , setting step 0.01 % U_N
Inaccuracy:		
-	Voltage	±1.5 % U_{SET} or ±30 mV
Instant operation time		
Alarm and trip operation time:		
-	(I_m/I_{set} ratio > ±30% overreach or 1.00 °)	<40 ms (typically 30 ms) 50/60 Hz <50 ms (typically 40 ms) 16.67 Hz
Reset		
Trip pulse		~5-10ms

2.2 Frequency protections

2.2.1 Overfrequency and underfrequency protection ($f > / <$; 81O/81U)

Table 2.6 Technical data for the overfrequency and underfrequency function

Input signals	
Sampling mode	Fixed Tracking
Frequency reference 1	CT1IL1, CT2IL1, VT1U1, VT2U1
Frequency reference 2	CT1IL2, CT2IL2, VT1U2, VT2U2
Frequency reference 3	CT1IL3, CT2IL3, VT1U3, VT2U3
Pick-up	
$f >$ pick-up setting	10.00...70.00 Hz, setting step 0.01 Hz
$f <$ pick-up setting	7.00...65.00 Hz, setting step 0.01 Hz
Inaccuracy (sampling mode):	
- Fixed	± 20 mHz (50/60 Hz fixed frequency)
- Tracking	± 20 mHz ($U > 30$ V secondary) ± 20 mHz ($I > 30$ % of rated secondary)
Operation time	
Definite time function operating time setting	0.00...1800.00 s, setting step 0.005 s
Inaccuracy:	
- Definite time (I_M/I_{SET} ratio ± 50 mHz)	± 1.5 % or ± 50 ms (max. step size: 100 mHz)
Instant operation time	
Start time and instant operation time (trip):	
- I_M/I_{SET} ratio ± 50 mHz (Fixed)	< 70 ms (max. step size: 100 mHz)
- I_M/I_{SET} ratio ± 50 mHz (Tracking)	< 3 cycles or < 60 ms (max. step size: 100 mHz)
Reset	
Reset ratio	0.020 Hz
Instant reset time and start-up reset:	
- I_M/I_{SET} ratio ± 50 mHz (Fixed)	< 110 ms (max. step size: 100 mHz)
- I_M/I_{SET} ratio ± 50 mHz (Tracking)	< 3 cycles or < 70 ms (max. step size: 100 mHz)

NOTE The secondary voltage must exceed 2 volts or the current must exceed 0.25 amperes (peak-to-peak) in order for the function to measure frequency.

NOTE The frequency is measured two seconds after a signal is received.

2.2.2 Rate-of-change of frequency protection ($df/dt > / <$; 81R)

Table 2.7 Technical data of the rate-of-change of frequency function

Input signals	
Sampling mode	Fixed Tracking
Frequency reference 1	CT1IL1, CT2IL1, VT1U1, VT2U1
Frequency reference 2	CT1IL2, CT2IL2, VT1U2, VT2U2
Frequency reference 3	CT1IL3, CT2IL3, VT1U3, VT2U3
Pick-up	
$Df/dt > / <$ pick-up setting	0.15...1.00 Hz/s, setting step 0.01 Hz
$f >$ limit	10.00...70.00 Hz, setting step 0.01 Hz

f < limit	7.00...65.00 Hz, setting step 0.01 Hz
Pick-up inaccuracy	
Df/dt	±5.0 %I _{SET} or ±20 mHz/s
Frequency	±15 mHz (U > 30 V secondary) ±20 mHz (I > 30 % of rated secondary)
Operation time	
Definite time function operating time setting	0.00...1800.00 s, setting step 0.005 s
Inaccuracy: - Definite time (I _M /I _{SET} ratio +/- 50 mHz)	±1.5 % or ±110 ms (max. step size: 100 mHz)
Start time and instant operation time (trip):	
f _M /f _{SET} ratio +/- 20 mHz (overreach)	<180 ms
f _M /f _{SET} ratio +/- 200 mHz (overreach)	<90 ms
Reset	
Reset ratio (frequency limit)	0.020 Hz
Instant reset time and start-up reset - f _M /f _{SET} ratio +/- 50 mHz	<2 cycles or <60 ms (max. step size: 100 mHz)

NOTE The frequency is measured two seconds after a signal is received.

2.3 Control functions

2.3.1 Synchrocheck ($\Delta V/\Delta a/\Delta f$; 25)

Table 2.8 Technical data for the synchrocheck function

Input signals	
Voltage inputs	U1, U2, U3 or U4 voltage channel
Voltage input magnitudes	RMS line-to-line or line-to-neutral voltages U3 or U4 voltage channel RMS
Pick-up	
U diff < setting	2.00...50.00 %U _N , setting step 0.01 %U _N
Angle diff < setting	3.0...90.0 deg, setting step 0.10 deg
Freq diff < setting	0.05...0.50 Hz, setting step 0.01 Hz
Inaccuracy: - Voltage - Frequency - Angle	±3.0 %U _{SET} or ±0.3 %U _N ±25 mHz (U > 30 V secondary) ±1.5° (U > 30 V secondary)
Reset	
Reset ratio: - Voltage - Frequency - Angle	99 % of the pick-up voltage setting 20 mHz ±2.0°
Activation time	
Activation (to LD/DL/DD)	<35 ms
Activation (to Live Live)	<60 ms
Reset	<40 ms
Bypass modes	

Voltage check mode (excluding LL)	LL+LD, LL+DL, LL+DD, LL+LD+DL, LL+LD+DD, LL+DL+DD, bypass
U live > limit	0.10...100.00 %U _N , setting step 0.01 %U _N
U dead < limit	0.00...100.00 %U _N , setting step 0.01 %U _N

NOTE The minimum voltage for direction and frequency solving is 20.0 %U_N.

2.3.2 Object control and monitoring

Table 2.9 Technical data for the object control and monitoring function

General	
Number of objects	5
Supported object types	Circuit breaker Circuit breaker with withdrawable cart Disconnecter (MC) Disconnecter (GND)
Signals	
Input signals	Digital inputs Software signals
Output signals	Close command output Open command output
Operation time	
Breaker traverse time setting	0.02...500.00 s, setting step 0.02 s
Max. close/open command pulse length	0.02...500.00 s, setting step 0.02 s
Control termination time out setting	0.02...500.00 s, setting step 0.02 s
Inaccuracy: - Definite time operating time	±0.5 % or ±10 ms
Breaker control operation time	
External object control time	<75 ms
Object control during auto-reclosing	See the technical sheet for the auto-reclosing function.

Table 2.10 Technical data for the circuit breaker wear monitoring function

Pick-up	
Breaker characteristics settings:	
- Nominal breaking current	0.00...100.00 kA, setting step 0.001 kA
- Maximum breaking current	0.00...100.00 kA, setting step 0.001 kA
- Operations with nominal current	0...200 000 operations, setting step 1 operation
- Operations with maximum breaking current	0...200 000 operations, setting step 1 operation
Pick-up setting for Alarm 1 and Alarm 2	0...200 000 operations, setting step 1 operation
Inaccuracy	
Inaccuracy for current/operations counter:	
- Current measurement element	$0.1 \times I_N > I < 2 \times I_N$ ±0.2 % of the measured current, rest 0.5 %
- Operation counter	±0.5 % of operations deducted

2.3.3 Programmable stage (PSx>/<; 99)

The programmable stage is a stage that the user can program to create more advanced applications, either as an individual stage or together with programmable logic. The device has ten programmable stages, and each can be set to follow one to

three analog measurements. The programmable stages have three available pick up terms options: overX, underX and rate-of-change of the selected signal. Each stage includes a definite time delay to trip after a pick-up has been triggered.

The programmable stage cycle time is 5 ms. The pick-up delay depends on which analog signal is used as well as its refresh rate (typically under a cycle in a 50 Hz system).

2.3.4 Indicator object monitoring

Table 2.11 Technical data for the indicator object monitoring function

General	
Number of objects	5
Supported object types	Disconnecter (GND) Custom object image
Signals	
Input signals	Digital inputs Software signals

2.3.5 Setting group selection

Table 2.12 Technical data for the setting group selection function

Settings and control modes	
Setting groups	8 independent, control-prioritized setting groups
Control scale	Common for all installed functions which support setting groups
Control mode	
Local	Any binary signal available in the device
Remote	Force change overrule of local controls either from the setting tool, HMI or SCADA
Operation time	
Reaction time	<5 ms from receiving the control signal

2.4 Monitoring functions

2.4.1 Voltage transformer supervision (60)

Table 2.13 Technical data for the voltage transformer supervision function

Measurement inputs	
Voltage inputs	U_{L1}, U_{L2}, U_{L3} $U_{L12}, U_{L23}, U_{L31}$
Voltage input magnitudes	RMS line-to-line or line-to-neutral voltages
Pick-up	
Pick-up settings:	
- Voltage (low pick-up)	$0.05...0.50 \times U_N$, setting step $0.01 \times U_N$
- Voltage (high pick-up)	$0.50...1.10 \times U_N$, setting step $0.01 \times U_N$
- Angle shift limit	$2.00...90.00$ deg, setting step 0.10 deg
Inaccuracy:	
- Voltage	$\pm 1.5 \% U_{SET}$
- U angle ($U > 1$ V)	$\pm 1.5^\circ$

External line/bus side pick-up (optional)	0 → 1
Time delay for alarm	
Definite time function operating time setting	0.00...1800.00 s, setting step 0.005 s
Inaccuracy: - Definite time (U_M/U_{SET} ratio > 1.05/0.95)	±1.0 % or ±35 ms
Instant operation time (alarm): - U_M/U_{SET} ratio > 1.05/0.95	<80 ms
VTS MCB trip bus/line (external input)	<50 ms
Reset	
Reset ratio	97/103 % of the pick-up voltage setting
Reset time setting Inaccuracy: Reset time	0.010...10.000 s, step 0.005 s ±2.0 % or ±80 ms
Instant reset time and start-up reset	<50 ms
VTS MCB trip bus/line (external input)	<50 ms

NOTE When turning on the auxiliary power of a device, the normal condition of a stage has to be fulfilled before tripping.

2.4.2 Disturbance recorder

Table 2.14 Technical data for the disturbance recorder function

Recorded values	
Recorder analog channels	0...20 channels Freely selectable
Recorder digital channels	0...95 channels Freely selectable analog and binary signals 5 ms sample rate (FFT)
Performance	
Sample rate	8, 16, 32 or 64 samples/cycle
Recording length	0.000...1800.000 s, setting step 0.001 s The maximum length is determined by the chosen signals.
Number of recordings	0...100, 60 MB of shared flash memory reserved The maximum number of recordings according to the chosen signals and operation time setting combined

2.4.3 Voltage memory

Table 2.15 Technical data for the voltage memory function

Measurement inputs	
Voltage inputs	U_{L1}, U_{L2}, U_{L3} $U_{L12}, U_{L23}, U_{L31} + U_0$
Pick-up	
Pick-up voltage setting	2.00...50.00 % U_N , setting step 0.01 x % U_N
Inaccuracy: - Voltage	±1.5 % U_{SET} or ±30 mV
Operation time	

Angle memory activation delay	<20 ms (typically 5 ms)
Maximum active time	0.020...50.000 s, setting step 0.005 s
Inaccuracy: - Definite time (U_M/U_{SET} ratio >1.05)	± 1.0 % or ± 35 ms
Angle memory	
Angle drift while voltage is absent	$\pm 1.0^\circ$ per 1 second
Reset	
Reset ratio: - Voltage memory (voltage)	103 % of the pick-up voltage setting
Reset time	<50 ms

NOTE Voltage memory is activated only when all line voltages fall below set pick-up value.

NOTE Voltage memory activation captures healthy situation voltage angles, one cycle before actual activation (50Hz/ 20ms before "bolted" fault)

3. Technical specifications

3.1 Electromagnetic compatibility

Emission	Standard	Class	Value
Conducted Disturbance Emission	IEC 60255-26	A	0.15 to 30 MHz IACS E10 Setup according to CISPR 16. Conducted emission measured from 10kHz
	IEC 61000-6-4	A	
Radiated emission (below 1 GHz)	IEC 60255-26		30 to 1000 MHz
	IEC 61000-6-4	A	IACS E10 Setup according to CISPR 16. Radiated emission measured from 150 kHz to 2000 MHz
Radiated emission (above 1 GHz)	IEC 60255-26		1 to 6 GHz
	IEC 61000-6-4	A	

Immunity	Standard	Level	Value
Electrostatic Discharge	IEC 60255-26		8 kV air discharge
	IEC 61000-4-2 IACS E10	3	6 kV direct discharge
Radiated immunity	IEC 60255-26		10 V/m; 80 MHz to 1 GHz; 1.4 GHz to 2.7 GHz IACS E10 80 MHz to 2 GHz 10 V/m 3 s dwell time
	ENV 50204 (GSM)	3	10 V/m; 2 W at 0.6 m
Fast transient/burst immunity	IEC 60225-26		2 kV
	IEC 61000-4-4 IACS E10	3	2 kV 2 kV
Surge immunity	IEC 60255-26		1 kV symmetrical (line to line)
	IEC 61000-4-5 IACS E10	3	2 kV unsymmetrical (line to earth) 0.5 kV symmetrical (line to line) (only for IACS E10) 1 kV unsymmetrical (line to earth) (only for IACS E10)
Conducted immunity	IEC 60255-26		0.15 to 80 MHz; 10 V
	IEC 61000-4-6	3	IACS E10 3 s dwell time.
Power frequency magnetic field immunity	IEC 60255-26		30 A/m continuous
	IEC 61000-4-8	4	300 A/m; 1 s to 3 s
Pulse magnetic field immunity	IEC 61000-4-9	5	1000 A/m
Damped oscillatory magnetic field immunity	IEC 61000-4-10	4	30 A/m
Oscillatory transient immunity – Ring wave	IEC 61000-4-12	4	100 kHz 4 kV common mode
			2 kV differential mode
Oscillatory transient immunity – Slow damped oscillatory wave	IEC 61000-4-18 ANSI/IEEE Std C37.90.1	3	100 kHz 1 kV differential mode 2.5 kV common mode
Oscillatory transient immunity – Slow damped oscillatory wave	IEC 60255-26 IEC 61000-4-18	3	1.0 MHz 2.5 kV common mode
	ANSI/IEEE Std C37.90.1		2.5 kV differential mode

Immunity	Standard	Level	Value
Voltage dips	IEC 60255-26		0 %
	IEC 61000-4-11		DC 10 ms
	IEC 61000-4-29		AC 0.5 cycle (10 ms)
Voltage dips	IEC 60255-26		40 %
	IEC 61000-4-11		DC 200 ms
	IEC 61000-4-29		AC 10/12 cycles (10 ms) Tested both 50/60 Hz
Voltage dips	IEC 60255-26		70 %
	IEC 61000-4-11		DC 500 ms
	IEC 61000-4-29		AC 25/30 cycles (10 ms)
Voltage interruptions	IEC 60255-26		0 %
	IEC 61000-4-11 IACS E10		DC 5 s (3 interruptions w. 10 s interval) DC 30 s/60 s (3 interruptions w. 60 s interval)
	IEC 61000-4-29 IACS E10		AC 250 cycles (5 s) (3 interruptions w. 10 s interval) AC 30 s (3 interruptions w. 90 s interval) 1 additional interruption during booting
Voltage variations permanent	IACS E10		DC +30 % 24H DC -15 % 15 min AC +6 % V AC/+5 % Hz 15 min AC +6 % V AC/-5 % Hz 15 min AC -10 % V AC/-5 % Hz 15min AC -10 % V AC/+5 % Hz 15 min
Voltage variations transient	IACS E10		AC +20 % V AC 1.5 s/+10 % Hz 5 s AC -20 % V AC 1.5 s/-10 % Hz 5 s
Ripple	IEC 60255-26		15 % of DC; 100 Hz
	IEC 61000-4-17		
Power Frequency Immunity	IEC 60255-26		150 V, 50 Hz, common mode
	IEC 61000-4-16		300 V, 50 Hz, differential mode

3.2 Mechanical durability

Energised	Standard	Class	Value
Vibration response	IEC 60255-27 IEC 60255-21-1	2	10 to 58.1 Hz: 0.15 mmpp 58.1 to 150 Hz: 1 g 1 cycle in each axis
Vibration	IACS E10		3 to 13.2 Hz 2 mmpp 13.2 to 100 Hz 0.7 g
Shock response	IEC 60255-27 IEC 60255-21-2	2	10 g; 11 ms

De-energised	Standard	Class	Value
Vibration endurance	IEC 60255-27 IEC 60255-21-1	2	10 to 150 Hz; 2 g acceleration; 20 sweep cycles
Shock withstand	IEC 60255-27	2	30 g; 11 ms

De-energised	Standard	Class	Value
	IEC 60255-21-2		
Bump	IEC 60255-27 IEC 60255-21-2	2	20 g; 16 ms

3.3 Environment

General	Standard	Value
Cold non-operation	I IEC 60255-27 IEC 60255-1 IACS E10	-25 °C; 16 h
Dry heat operation	IEC 60255-27 IEC 60255-1 IACS E10	60 °C; 16 h
Damp heat (static)	IEC 60255-27 IEC 60255-1	55 °C; 93 % RH; 10 days
Cyclic temperature with humidity (damp heat cyclic)	IEC 60255-27 IEC 60255-1 IACS E10	55 °C @ 93 % RH; 25 °C @ 97 % RH, 12 h + 12 h; 6 cycles 55 °C @ 95 % RH; 12 h + 12 h; 2 cycles
Change of temperature	IEC 60255-1	5 cycles; -25 °C to 70 °C

Storage	Standard	Value
Low temperature storage	IEC 60255-27 IEC 60255-1	-40 °C; 16 h
High temperature storage	IEC 60255-27 IEC 60255-1	70 °C; 16 h

3.4 Safety

Electrical	Standard	Value
Insulation resistance	IEC 60255-27 IACS E10	Before environmental tests: >100 MΩ at DC 500 V >100 MΩ at DC 500 V (Uw >65 V) >10 MΩ at DC 50 V (Uw <65 V) After environmental tests: >10 MΩ at DC 500 V (Uw >65 V) >1 MΩ at DC 50 V (Uw <65 V)
Reverse polarity	IEC 60255-27	
Gradual shut down/start-up tests	IEC 60255-27	
Impulse voltage	IEC 60255-27	5 kV; 1.2/50 μs; 0.5 J
Power frequency dielectric withstand	IEC 60255-27	3.5 kV; 50 Hz; 1 min (PS, DI, DO, I, RS485 AO) 4.35 kV; 50 Hz; 1 min (U)
Protective bonding impedance	IEC 60255-27	<0.1 Ω at 20 A 60 s
Insulation class		Class I
Over-voltage CAT	IEC 60255-27	III

Enclosure	Standard	Value
Dust/water ingress	IEC 60255-27 IEC 60529	IP 54 (front), IP 20 (back)

4. Hardware

4.1 Processor and power supply

Table 4.1 General information for the CPU module

Terminal block connection	
Screw connection terminal block (standard)	Phoenix Contact MSTB 2,5/5-ST-5,08
Spring cage terminal block (option)	Phoenix Contact FKC 2,5/20-STF-5,08
Solid or stranded wire Nominal cross section	2.5 mm ²
RS-485 serial terminal block connection	
Screw connection terminal block (standard)	Phoenix Contact MC 1,5/ 5-ST-3,81
Spring cage terminal block (option)	Phoenix Contact FK-MCP 1,5/ 5-ST-3,81
Solid or stranded wire Nominal cross section	1.5 mm ²

4.1.1 Auxiliary supply

Table 4.2 Power supply model H

Rated values	
Rated auxiliary voltage	100...120 V DC
Power consumption	< 7 W (no option cards) < 15 W (maximum number of option cards)
Maximum permitted interrupt time	< 60 ms with 110 VDC
DC ripple	< 15 %
Other	
Minimum recommended fuse rating	MCB C2

Table 4.3 Power supply model L

Rated values	
Rated auxiliary voltage	24...48 VDC
Power consumption	< 7 W (no option cards) < 15 W (maximum number of option cards)
Maximum permitted interrupt time	< 90 ms with 24 VDC
DC ripple	< 15 %
Other	
Minimum recommended fuse rating	MCB C2

4.1.2 Isolated digital inputs

Table 4.4 CPU model-isolated digital inputs, with thresholds defined by order code

Number of digital inputs	3
Rated values	
Rated auxiliary voltage	265 V (AC/DC)
Nominal voltage	Order code defined: 24, 110, 220 V (AC/DC) Caution: When the working voltage is above 150 V AC, do not mix AC and DC voltage inside any relay groups or digital input groups.
Pick-up threshold	Order code defined: 19, 90, 170 V
Release threshold	Order code defined: 14, 65, 132 V
Scanning rate	5 ms
Settings	
Pick-up delay	Software settable: 0...1800 s
Polarity	Software settable: Normally On/Normally Off
Current drain	2 mA

4.1.3 Digital outputs

Table 4.5 Digital outputs (Normally Open)

Number of digital outputs	4
Rated values	
Rated auxiliary voltage	265 V (AC/DC) Caution: When the working voltage is above 150 V AC, do not mix AC and DC voltage inside any relay groups or digital input groups.
Continuous carry	5 A
Make and carry 0.5 s	30 A
Make and carry 3 s	15 A
Breaking capacity, DC (L/R = 40 ms)	
at 48 VDC	1 A
at 110 VDC	0.4 A
at 220 VDC	0.2 A
Control rate	5 ms
Settings	
Polarity	Software settable: Normally Open / Normally Closed

Table 4.6 Digital outputs (Change-Over)

Number of digital outputs	1 configurable (plus 1 for fault signaling)
Rated values	
Rated auxiliary voltage	265 V (AC/DC) Caution: When the working voltage is above 150 V AC, do not mix AC and DC voltage inside any relay groups or digital input groups.
Continuous carry	2.5 A
Make and carry 0.5 s	30 A
Make and carry 3 s	15 A

Breaking capacity, DC (L/R = 40 ms)	
at 48 VDC	1 A
at 110 VDC	0.3 A
at 220 VDC	0.15 A
Control rate	5 ms
Settings	
Polarity	Software settable: Normally Open / Normally Closed

4.1.4 Communication ports

Front panel local communication port	
Port, media	Ethernet RJ-45, Copper
Number of ports	1
Port protocols	PC-protocols, FTP, Telnet
Data transfer rate	100 MB
System integration	Cannot be used for system protocols, only for local programming
Rear panel system communication port A	
Port, media	Ethernet RJ-45, Copper
Number of ports	1
Port protocols	Modbus TCP, DNP 3.0, FTP, Telnet, IEC 61850, IEC-104
Data transfer rate	100 MB
System integration	Can be used for system protocols and for local programming
Rear panel system communication port B	
Port, media	RS-485, Copper
Number of ports	1
Port protocols	Modbus RTU, DNP 3.0, IEC-103, IEC-101, SPA
Data transfer rate	65580 kB/s
System integration	Can be used for system protocols

4.2 Voltage measurement module

Table 4.7 Technical data for the voltage measurement module

General information	
Compatibility	MVR-200 series and MVR-250 series models
Connection	
Measurement channels/VT inputs	4 independent VT inputs (U1, U2, U3 and U4)
Measurement	
Sample rate	64 samples per cycle in frequency range 6...75Hz
Voltage measuring range	0.50...480.00 V (RMS)
Voltage measurement inaccuracy	For 2...480 V AC: $\pm 0.2\%$ or ± 10 mV, whichever is biggest
Temperature-dependent voltage measurement inaccuracy	Reference temperature: 25 °C Operation temperature range: -25 to 60 °C Inaccuracy: An additional ± 30 mV per 10 °C

Angle measurement inaccuracy	±0.2 degrees (15...300 V) ±1.5 degrees (1...15 V)
Voltage measurement bandwidth (freq.)	7...75 Hz fundamental, up to the 31 st harmonic voltage
Terminal block connection	
Screw connection terminal block (standard)	Phoenix Contact PC 5/ 8-STCL1-7,62
Spring cage terminal block (optional)	Phoenix Contact SPC 5/ 8-STCL-7,82
Solid or stranded wire	
Nominal cross section	6 mm ²
Input impedance	~24.5 MΩ
Burden (50/60 Hz)	<0.02 VA
Thermal withstand	630 V _{RMS} (continuous)

NOTE Voltage measurement accuracy has been verified with 50/60 Hz.

The amplitude difference is 0.2 % and the angle difference is 0.5 degrees higher at 16.67 Hz and other frequencies.

4.3 Frequency measurement

Table 4.8 Frequency measurement accuracy.

Frequency measurement performance	
Frequency measuring range	6...75 Hz fundamental, up to the 31 st harmonic voltage
Inaccuracy	20 mHz*

NOTE * If one of these conditions is met, the frequency inaccuracy is ±30 mHz:

- $f \neq 50 \text{ Hz or } 60 \text{ Hz}$.
- Frequency tracking via voltages is applied.
- $U < 15 \text{ V}$.

4.4 Digital inputs and outputs

4.4.1 Digital input module (option card B)

Table 4.9 Technical data for the digital input module

Number of digital inputs	8 x isolated (2 groups)
Rated values	
Rated auxiliary voltage	5...265 V (AC/DC)
Current drain	2 mA
Scanning rate	5 ms
Activation/release delay	5...11 ms
Settings	
Pick-up threshold	Software settable: 16...200 V, setting step 1 V
Release threshold	Software settable: 10...200 V, setting step 1 V
Pick-up delay	Software settable: 0...1800 s
Drop-off delay	Software settable: 0...1800 s
Polarity	Software settable: Normally On/Normally Off

Terminal block connection	
Screw connection terminal block (standard)	Phoenix Contact MSTB 2,5/10-ST-5,08
Spring cage terminals block (option)	Phoenix Contact FKC 2,5/10-STF-5,08
Solid or stranded wire	
Nominal cross section	2.5 mm ²

4.4.2 Digital output module (option card C)

Table 4.10 Technical data for the digital output module

Number of digital outputs	5
Rated values	
Rated auxiliary voltage	265 V (AC/DC)
Continuous carry	5 A
Make and carry 0.5 s	30 A
Make and carry 3 s	15 A
Breaking capacity, DC (L/R = 40 ms)	
at 48 VDC	1 A
at 110 VDC	0.4 A
at 220 VDC	0.2 A
Control rate	5 ms
Settings	
Polarity	Software settable: Normally On/Normally Off
Terminal block connection	
Screw connection terminal block (standard)	Phoenix Contact MSTB 2,5/10-ST-5,08
Spring cage terminals block (option)	Phoenix Contact FKC 2,5/10-STF-5,08
Solid or stranded wire	
Nominal cross section	2.5 mm ²

4.5 Analogue inputs

4.5.1 RTD input module (option card F)

Table 4.11 Technical data for the RTD input module.

General information	
Hardware configuration code	F
Sensors	
Channels 1-8	2/3/4-wire RTD Pt100 or Pt1000
Terminal block connection	
Maximum cross section (solid or stranded wire)	1.5 mm ²

4.6 Analogue outputs

4.6.1 Analogue output module (mA out & mA in) (option card I)

Table 4.12 Technical data for the analogue output module

Signals	
Output magnitudes	4 × mA output signal (DC)
Input magnitudes	1 × mA input signal (DC)
mA input	
Range (hardware)	0...33 mA
Range (measurement)	0...24 mA
Inaccuracy	±0.1 mA
Update cycle	5...10 000 ms, setting step 5 ms
Response time @ 5 ms cycle	~ 15 ms (13...18 ms)
Update cycle time inaccuracy	Max. +20 ms above the set cycle
mA input scaling range	0...4000 mA
Output scaling range	-1 000 000.0000...1 000 000.0000, setting step 0.0001
mA output	
Inaccuracy @ 0...24 mA	±0.01 mA
Response time @ 5 ms cycle [fixed]	< 5 ms
mA output scaling range	0...24 mA, setting step 0.001 mA
Source signal scaling range	-1 000 000.000...1 000 000.0000, setting step 0.0001
Terminal block connection	
Screw connection terminal block (standard)	Phoenix Contact MSTB 2,5/10-ST-5,08
Spring cage terminals block (option)	Phoenix Contact FKC 2,5/10-STF-5,08
Solid or stranded wire	
Nominal cross section	2.5 mm ²

4.7 Additional communication options

4.7.1 Double RJ45 Ethernet & IRIG-B communication module (option card G)

Table 4.13 Technical data for the double RJ-45 Ethernet communication module.

General information	
Hardware configuration code	G
Ethernet connector features	
Protocols	IEC 61850 IEC 104 Modbus/TCP DNP3 FTP
Data transfer rate	100 MB/s
System integration	Can be used for system protocols and for local programming
Number of ports	2
Communication ports	Copper Ethernet RJ-45

IRIG-B Connector	
Maximum cross section (solid or stranded wire)	1.5 mm ²

4.7.2 Double ST 100 Mbps Ethernet communication module (option card H)

Table 4.14 Technical data for the double ST 100 Mbps Ethernet communication module

General information	
Dimensions	74 mm X 179 mm
Ports	ST connectors (2) and IRIG-B connector (1)
Protocols	
Protocols	IEC61850, DNP/TCP, Modbus/TCP, IEC104 & FTP
ST connectors	
Connector type	Duplex ST connectors 62.5/125 µm or 50/125 µm multimode fiber 100BASE-FX
Transmitter wavelength	1260...1360 nm (nominal: 1310 nm)
Receiver wavelength	1100...1600 nm
Maximum distance	2 km
IRIG-B Connector	
Screw connection terminal block	Phoenix Contact MC 1,5/ 2-ST-3,5 BD:1-2
Solid or stranded wire	
Nominal cross section	1.5 mm ²

4.7.3 Double LC 100 Mbps Ethernet communication module (option card J)

Table 4.15 Technical data for the double LC 100 Mbps Ethernet communication module

Protocols	
Protocols	HSR and PRP
Ports	
Quantity of fiber ports	2
Communication port C & D	LC fiber connector Wavelength 1300 nm
Fiber cable	50/125 µm or 62.5/125 µm multimode (glass)

4.7.4 Double RJ-45 (HSR, PRP) Ethernet communication module (option card K)

Table 4.16 Technical data for the double RJ-45 100 Mbps Ethernet communication module.

General information	
Hardware configuration code	K
Features	
Protocols	IEC 61850 IEC 104 Modbus/TCP DNP3 FTP

Redundancy	HSR and PRP
Data transfer rate	100 MB/s
System integration	Can be used for system protocols and for local programming
Ports	
Number of ports	2
Communication port	Copper Ethernet RJ-45

4.7.5 RS-232 & serial fiber communication module (option cards L to O)

Table 4.17 Technical data for the RS-232 & serial fiber communication module.

Ports	
RS-232	
Serial fiber (GG/PP/GP/PG)	
Serial port wavelength	
660 nm	
Cable type	
1 mm plastic fiber	
Terminal block connections	
Spring cage terminals block	Phoenix Contact DFMC 1,5/ 6-STF-3,5
Solid or stranded wire	
Nominal cross section	1.5 mm ²

4.8 MVR-21x display


4.8.1 Display

Table 4.18 Technical data for the HMI LCD display

Dimensions and resolution	
Number of dots/resolution	320 x 160
Size	84.78 × 49.90 mm (3.34 × 1.96 in)
Display	
Type of display	LCD
Color	Monochrome

4.9 Folios and configuration

MVR-21x folio

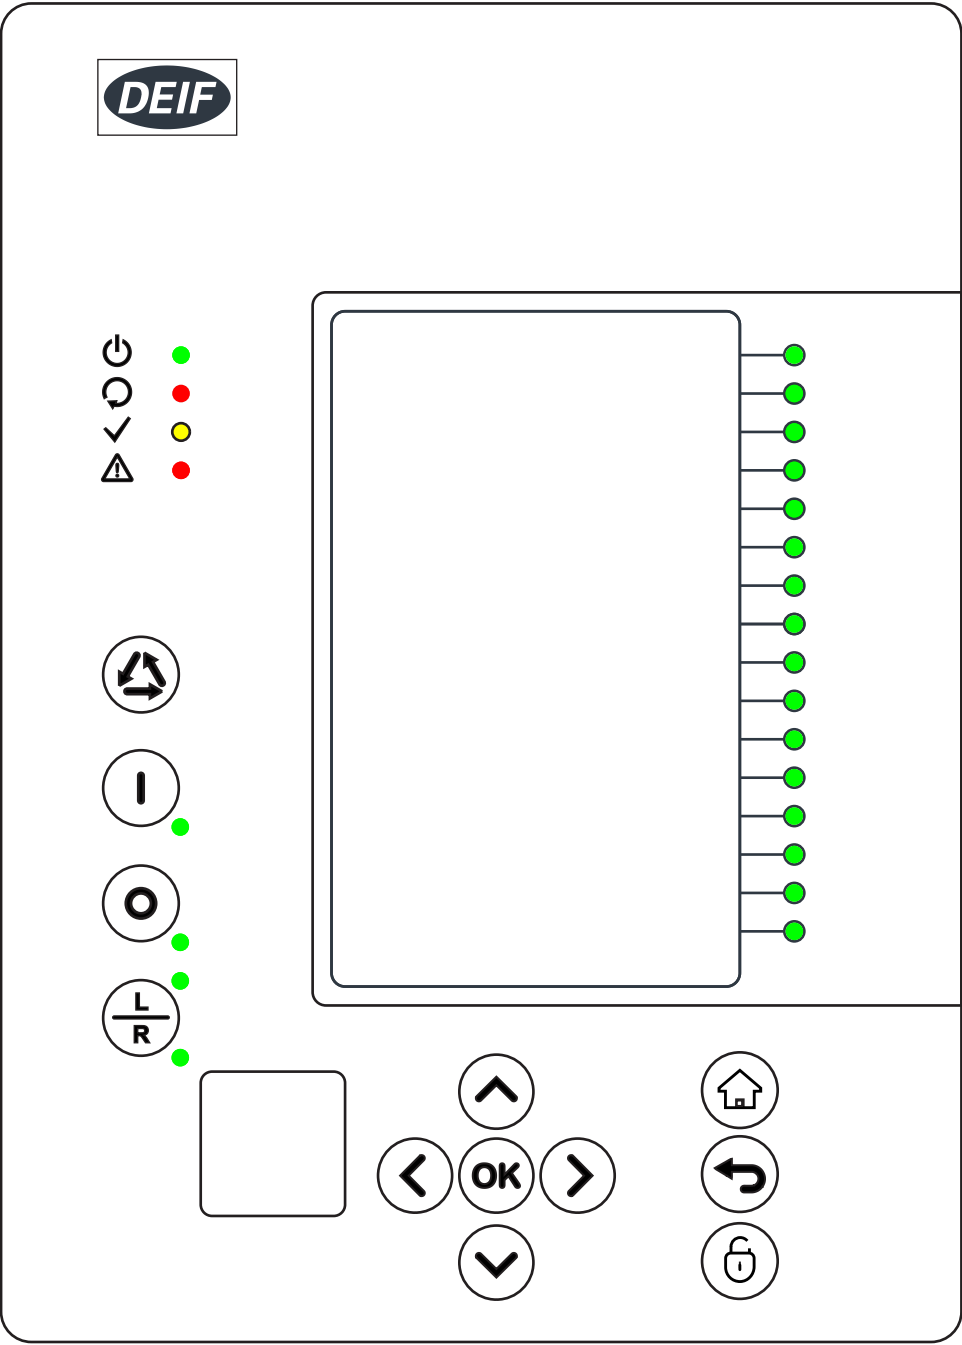

To meet marine class society requirements:

- The MVR must be configured so that the **Trip LED** ( ) is lit whenever a protection activates a breaker trip.
- For each trip protection, select *Trip ON* in the NOC EventMask. In this way, the cause of any trip is shown on the main screen and immediately visible to the operator.

4.10 Mechanical specifications

Device dimensions	210 series casing height	¼ rack 4U, depth 210 mm
Package dimensions (W x H x D)	210 series	230 x 120 x 210 mm
Weight	Device	1.5 kg
	In package	2.0 kg

Material	Housing	Metal
IP protection level	Front	IP54
	Rear	IP20
Tightening torque - M4 nuts	Front	1.3 N·m for 210 series

4.11 Environment

IEC 60255-27 degree of pollution	2
Maximum altitude above sea level	2000 m (6561.68 ft)
Operation temperature range	-25 °C to +60 °C

4.12 Safety

Wiring specification


Wiring must be multi-stranded, minimum 90 °C copper conductors only.

Galvanic isolation

- Ethernet: 550 V, 50 Hz, 1 minute
- COM ports: 550 V, 50 Hz, 1 minute
- Between Option I (mA I/O) and other I/O ports: 550 V, 50 Hz, 1 minute
- Between CT and other I/O ports: 2200 V, 50 Hz, 1 minute
- Between Relay and other I/O ports: 2200 V, 50 Hz, 1 minute
- Between DI and other I/O ports: 2200 V, 50 Hz, 1 minute
- Between PSU and other I/O ports: 2200 V, 50 Hz, 1 minute

4.13 Dimensions

MVR-210 dimensions

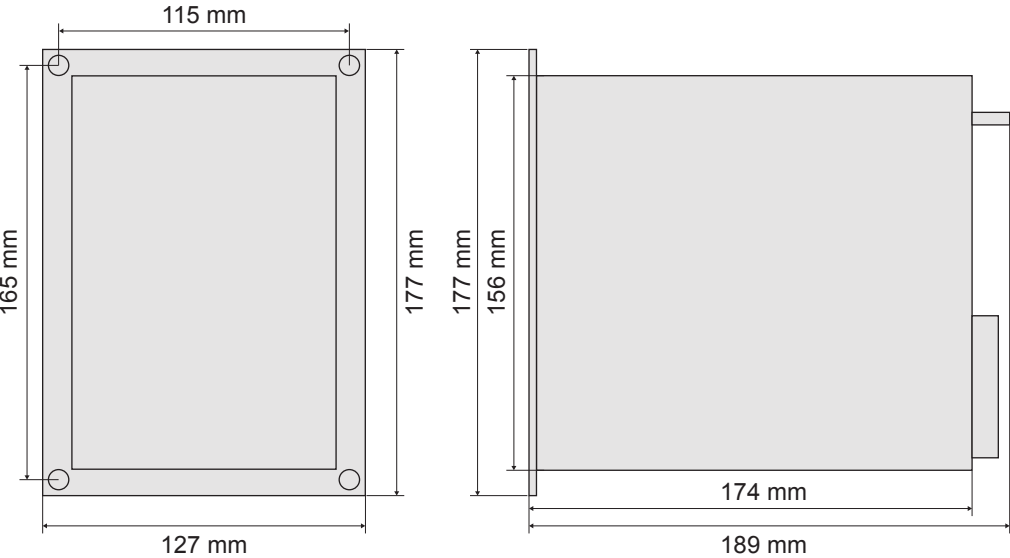



5. Ordering information

5.1 MVR Ordering

The drawings show the rear view of the MVR without hardware options.

MVR Busbar relay MVR-V211

MVR-V211□-P□8□A□A-□□□□□

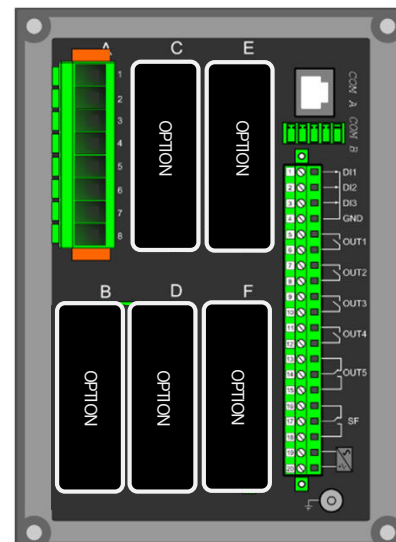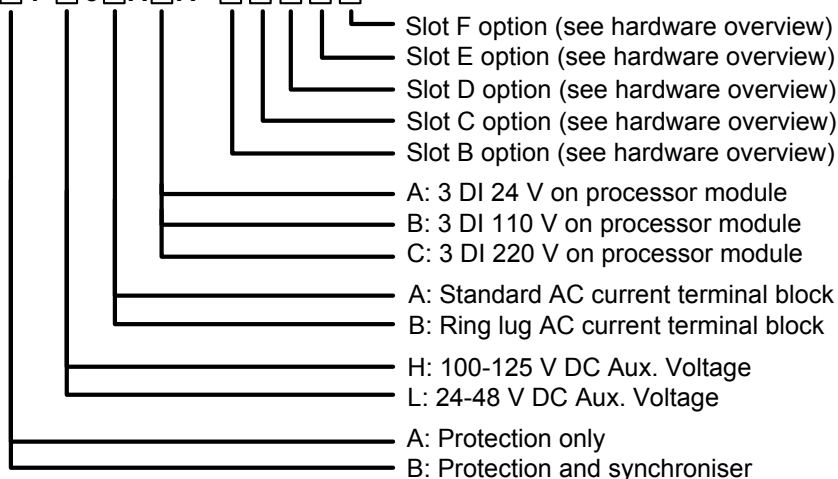

Hardware options overview

Option	Description
A	None (empty slot)
B	8 x isolated (2 groups) digital inputs 10 to 200 V DC
C	5 x relay outputs 220 V AC, 3 A 220 V DC, 0.3 A
D	Arc protection This option is not included in the marine approval.
F	RTD analogue input module (8 channels) This option is not included in the marine approval.
G	2 x RJ45 100Mb Ethernet & IRIG-B* This option is not included in the marine approval.
H	2 x ST 100Mb Ethernet & IRIG-B* This option is not included in the marine approval.
I	4 x analogue outputs 0 to 24 mA scalable 1 x analogue input 0 to 24 mA scalable Max. 2 modules per relay
J	Double LC 100Mb Ethernet*
K	2 x RJ45 100 Mb Ethernet (HSR, PRP redundant protocols)* This option is not included in the marine approval.
L	1 x RS232 Fiber PP (Plastic-Plastic)*

Option	Description
M	1 x RS232 Fiber PG (Plastic-Glass)*
N	1 x RS232 Fiber GP (Glass-Plastic)*
O	1 x RS232 Fiber GG (Glass-Glass)*

NOTE * Only one additional communication module per relay, to be placed in the last slot (Slot F).

Additional features

- 5-year extended warranty
- Conformal coating of printed circuit boards

NOTE These features have to be ordered separately.

5.2.1 Disclaimer

DEIF A/S reserves the right to change any of the contents of this document without prior notice.

The English version of this document always contains the most recent and up-to-date information about the product. DEIF does not take responsibility for the accuracy of translations, and translations might not be updated at the same time as the English document. If there is a discrepancy, the English version prevails.

5.2.2 Copyright

© Copyright DEIF A/S. All rights reserved.