

IOM3.3


Input/output module

Data sheet

4921240641-D



Improve
Tomorrow

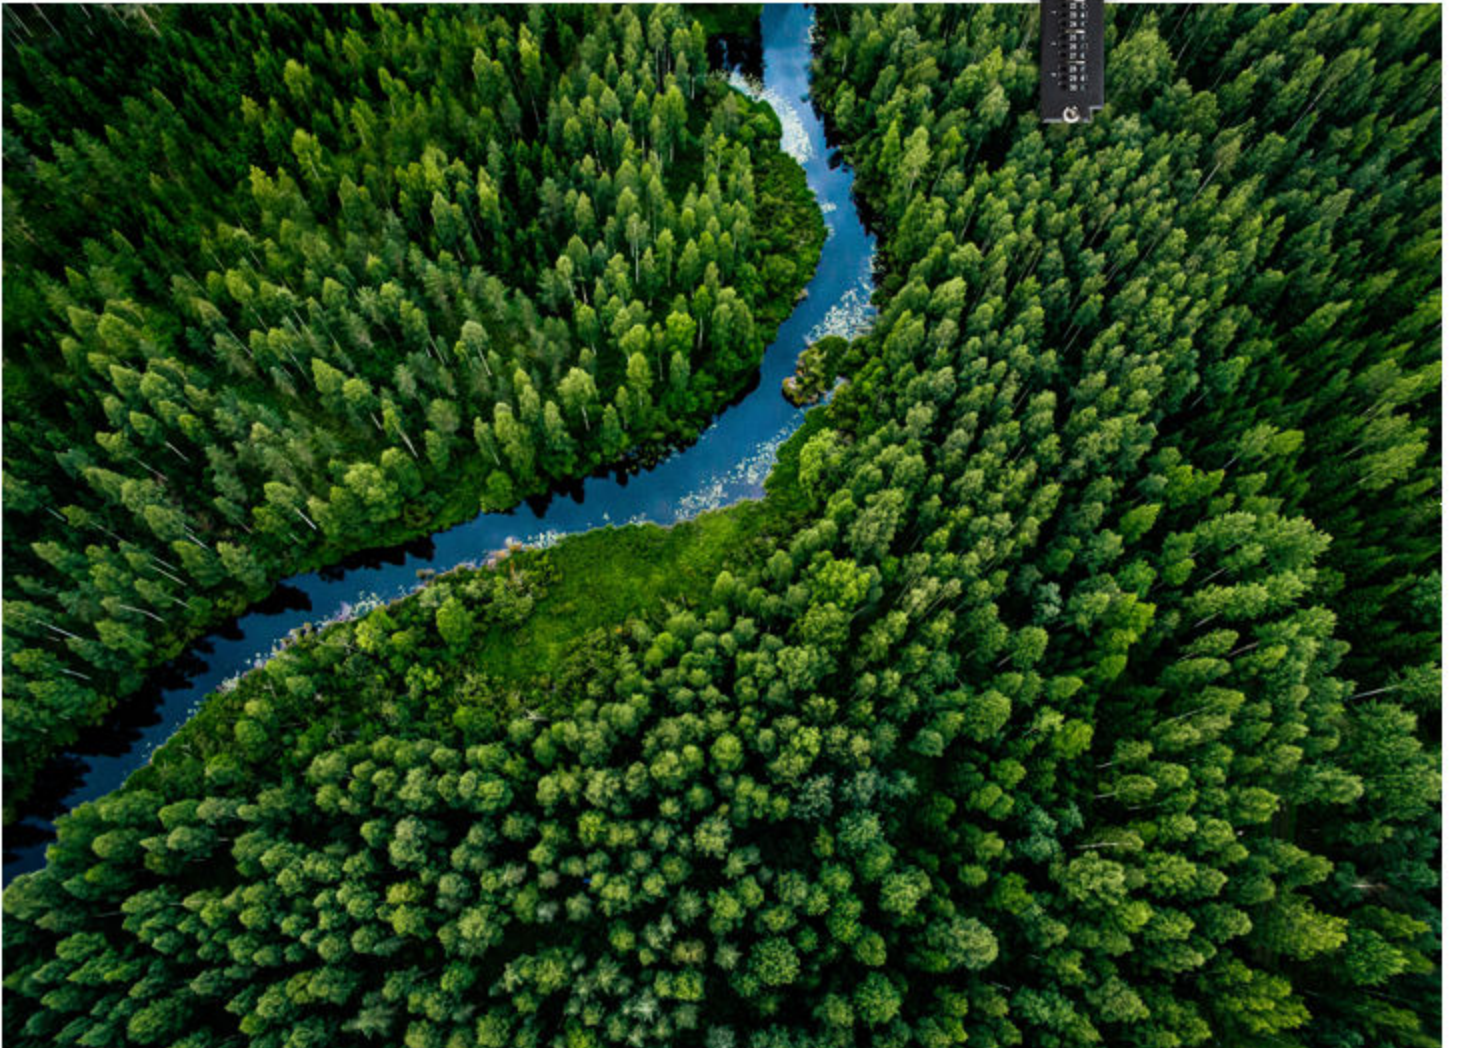

1. Series 300

1.1 About the hardware modules.....	3
-------------------------------------	---

2. Technical specifications

2.1 Input/output module IOM3.3.....	4
-------------------------------------	---

3. Legal information



3.1 Disclaimer and copyright.....	6
-----------------------------------	---

1. Series 300



1.1 About the hardware modules

The hardware modules are printed circuit boards that slot in to either a R7.1 or R4.1 rack. Depending on the type of module, they can provide AC or other measurements, inputs, outputs and give communication indication.

Controller racks

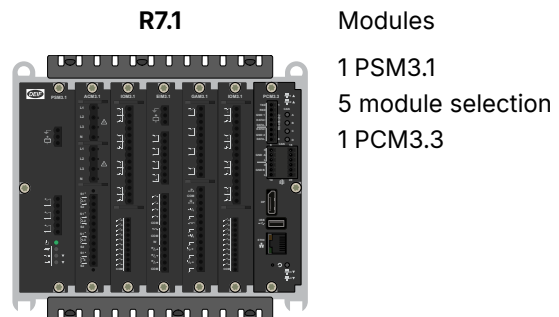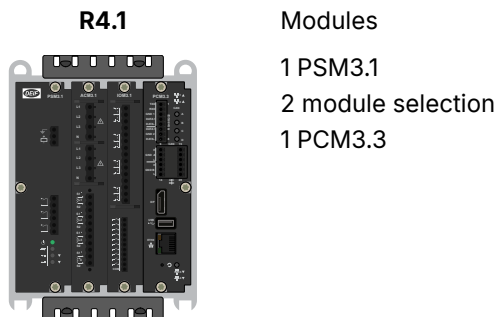

Extension racks (EtherCAT)

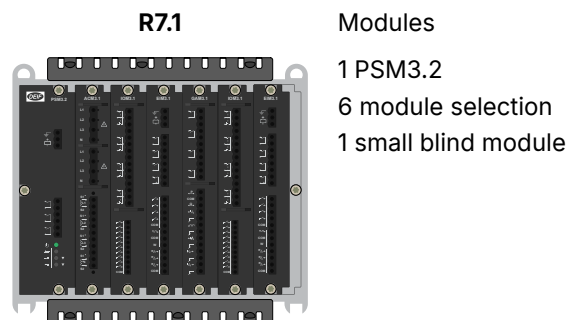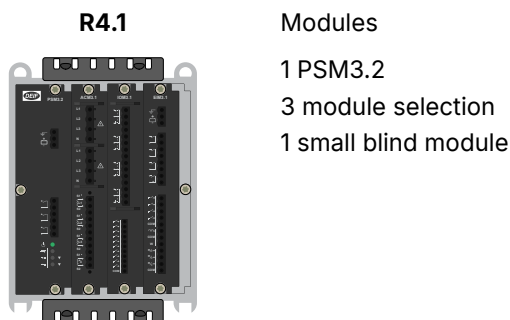

The hardware modules feature:

- Placement flexibility in the rack.
- Add, replace, or remove on-site.
- Automatically recognised.
- Configurable input and output functions (digital and analogue):
 - Digital input functions: Commands from operators or 3rd party equipment, changing configuration, operating information.
 - Digital output functions: Alarm status, commands to 3rd party equipment, operating information.
 - Analogue input functions: External set points, operating information, supervised binary inputs.
 - Analogue output functions: Regulation *, operating information.

NOTE * Only available on certain types of controller.


All slots must be covered during operation and blind modules can be used to cover unused slots.

2. Technical specifications

2.1 Input/output module IOM3.3

The input output module has 10 analogue multifunctional inputs. These I/Os are all configurable.

IOM3.3 terminals

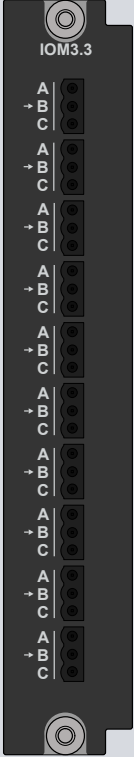Module	Count	Symbol	Type	Name
	10	A → B C	Analogue multifunctional inputs (mA, V DC, RMI)	Configurable

IOM3.3 technical specifications

Category	Specification
Analogue multifunctional inputs A → B C	<p>Digital inputs with wire break detection:</p> <ul style="list-style-type: none"> Dry contact inputs, 3 V DC internal supply Wire-break detection with maximum resistance for ON detection: 100 Ω to 400 Ω <p>Current inputs:</p> <ul style="list-style-type: none"> From active transmitter: 0 to 20 mA, or 4 to 20 mA Accuracy: ±10 uA ±0.25 % of actual reading <p>Voltage inputs (DC):</p> <ul style="list-style-type: none"> Range: ±10 V DC / 0 to 10 V DC Accuracy: ±10 mA ±0.25 % of actual reading <p>Resistance measurement inputs, 2 or 3 wire (RMI):</p> <ul style="list-style-type: none"> Resistance measurement: 0 to 4.5 kΩ Accuracy: ±1 Ω ±0.25 % of actual reading <p>Resistance measurement inputs, 1 wire (RMI):</p> <ul style="list-style-type: none"> Resistance measurement: 0 to 4.5 kΩ Accuracy: ±2 Ω ±0.25 % of actual reading <p>Pt100:</p> <ul style="list-style-type: none"> Range: -200 to 850 °C

Category	Specification
	<ul style="list-style-type: none"> Accuracy: $\pm 1\text{ }^{\circ}\text{C} \pm 0.25\%$ of actual reading <p>Pt1000:</p> <ul style="list-style-type: none"> Range: -200 to 850 $^{\circ}\text{C}$ Accuracy: $\pm 0.5\text{ }^{\circ}\text{C} \pm 0.25\%$ of actual reading <p>Thermocouple type, range and accuracy:</p> <ul style="list-style-type: none"> E: -200 to 1000 $^{\circ}\text{C}$ ($\pm 2\text{ }^{\circ}\text{C} \pm 0.25\%$ of actual reading) J: -210 to 1200 $^{\circ}\text{C}$ ($\pm 2\text{ }^{\circ}\text{C} \pm 0.25\%$ of actual reading) K: -200 to 1372 $^{\circ}\text{C}$ ($\pm 2\text{ }^{\circ}\text{C} \pm 0.25\%$ of actual reading) N: -200 to 1300 $^{\circ}\text{C}$ ($\pm 2\text{ }^{\circ}\text{C} \pm 0.25\%$ of actual reading) R: -50 to 1768 $^{\circ}\text{C}$ ($\pm 2\text{ }^{\circ}\text{C} \pm 0.25\%$ of actual reading) S: -50 to 1768 $^{\circ}\text{C}$ ($\pm 2\text{ }^{\circ}\text{C} \pm 0.25\%$ of actual reading) T: -200 to 400 $^{\circ}\text{C}$ ($\pm 2\text{ }^{\circ}\text{C} \pm 0.25\%$ of actual reading) <p>Note: Twisted pair and shielded cable is recommended to achieve specification and optimisation of noise immunity.</p> <p>General information for all inputs:</p> <ul style="list-style-type: none"> Voltage withstand: $\pm 36\text{ V DC}$
Internal cold junction compensation (CJC)	<p>Internal temperature sensor:</p> <ul style="list-style-type: none"> Range: 0 to 70 $^{\circ}\text{C}$ <ul style="list-style-type: none"> Accuracy: $\pm 1.0\text{ }^{\circ}\text{C}$ Range: -40 to 0 $^{\circ}\text{C}$ <ul style="list-style-type: none"> Accuracy: $\pm 2.0\text{ }^{\circ}\text{C}$ <p>Mathematical compensation:</p> <ul style="list-style-type: none"> If non channels are configured as 4-20 mA <ul style="list-style-type: none"> Accuracy: $\pm 1.0\text{ }^{\circ}\text{C}$ If any channels are configured as 4-20 mA <ul style="list-style-type: none"> Accuracy: $\pm 1.5\text{ }^{\circ}\text{C}$ <p>If it is needed to have 4-20 mA channels on the same card, it is recommended to use the top channels for 4-20 mA and the lower channels for TC's</p> <p>Internal cold junction accuracy:</p> <ul style="list-style-type: none"> Heat dissipated by nearby heat sources can cause errors in thermocouple measurements by heating the IOM3.3 terminals to a different temperature than the cold-junction compensation sensor. Thermal gradient across the terminals can cause the terminals of different IOM3.3 channels to be at different temperatures, which creates accuracy errors and affects the relative accuracy between channels. The temperature measurement accuracy specifications include errors caused by the thermal gradient across the IOM3.3 terminals for configurations with the IOM3.3 terminals facing forward or upward.
Terminal connections	<p>Terminals: Standard 45° plug, 1.5 mm²</p> <p>Wiring: 0.1 to 1.5 mm² (28 to 16 AWG), multi-stranded</p>
Torques and terminals	<p>Module faceplate screws: 0.5 N·m (4.4 lb-in)</p> <p>Connection of wiring to relay output terminals: 0.5 N·m (4.4 lb-in)</p> <p>Connection of wiring to input terminals: 0.25 N·m (2.2 lb-in)</p> <p>UL/cUL Listed: Wiring must be minimum 90 $^{\circ}\text{C}$ (194 $^{\circ}\text{F}$) copper conductors only</p>
Galvanic isolation	<p>All 10 multi inputs have a common ground</p> <p>Galvanic isolation from rack: 600 V, 50 Hz for 60 s</p>
Dimensions	L×H×D: 28 × 162 × 150 mm (1.1 × 6.4 × 5.9 in)
Weight	164 g (0.4 lb)

3. Legal information

3.1 Disclaimer and copyright

Open source software

This product contains open source software licensed under, for example, the GNU General Public License (GNU GPL) and GNU Lesser General Public License (GNU LGPL). The source code for this software can be obtained by contacting DEIF at support@deif.com. DEIF reserves the right to charge for the cost of the service.

General warranty

The warranty period for the purchased product is defined in the contract and order acknowledgement. In general, DEIF's Terms and Conditions of Sale and Delivery apply.

The product continuously monitors the operating temperature and stores this information in a log file on the device. DEIF uses this information for service purpose and to validate if issues with the product are covered by the warranty.

The software packages supplied are believed to be of the highest quality. Due to the nature of the software development process, it is possible that there are hidden defects in the software which may affect its use, or the operation of any software or device developed with this software package.

DEIF does not undertake responsibility for determining whether this package is suitable for the application, nor for ensuring the correct operation of the application software and hardware.

The warranty does not cover product wear parts, such as:

- Internal flash disc
- If applicable, SD card (purchased separately)
- Replaceable coil-cell battery, used for the real-time clock (available as a spare part)

Trademarks

DEIF and the DEIF logo are trademarks of DEIF A/S.

Bonjour[®] is a registered trademark of Apple Inc. in the United States and other countries.

Adobe[®], *Acrobat*[®], and *Reader*[®] are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States and/or other countries.

CANopen[®] is a registered community trademark of CAN in Automation e.V. (CiA).

SAE J1939[®] is a registered trademark of SAE International[®].

CODESYS[®] is a trademark of CODESYS GmbH.

EtherCAT[®], *EtherCAT P*[®], *Safety over EtherCAT*[®], are trademarks or registered trademarks, licensed by Beckhoff Automation GmbH, Germany.

VESA[®] and *DisplayPort*[®] are registered trademarks of Video Electronics Standards Association (*VESA*[®]) in the United States and other countries.

Google[®] and *Google Chrome*[®] are registered trademarks of Google LLC.

Linux[®] is a registered trademark of Linus Torvalds in the U.S. and other countries.

Modbus[®] is a registered trademark of Schneider Automation Inc.

Torx[®], *Torx Plus*[®] are trademarks or registered trademarks of Acument Intellectual Properties, LLC in the United States or other countries.

Windows[®] is a registered trademark of Microsoft Corporation in the United States and other countries.

All trademarks are the properties of their respective owners.

Copyright

© Copyright DEIF A/S. All rights reserved.

Disclaimer

DEIF A/S reserves the right to change any of the contents of this document without prior notice.

The English version of this document always contains the most recent and up-to-date information about the product. DEIF does not take responsibility for the accuracy of translations, and translations might not be updated at the same time as the English document. If there is a discrepancy, the English version prevails.