


iE Convert CU8

Control unit for 8 power stacks

Data sheet



Improve
Tomorrow

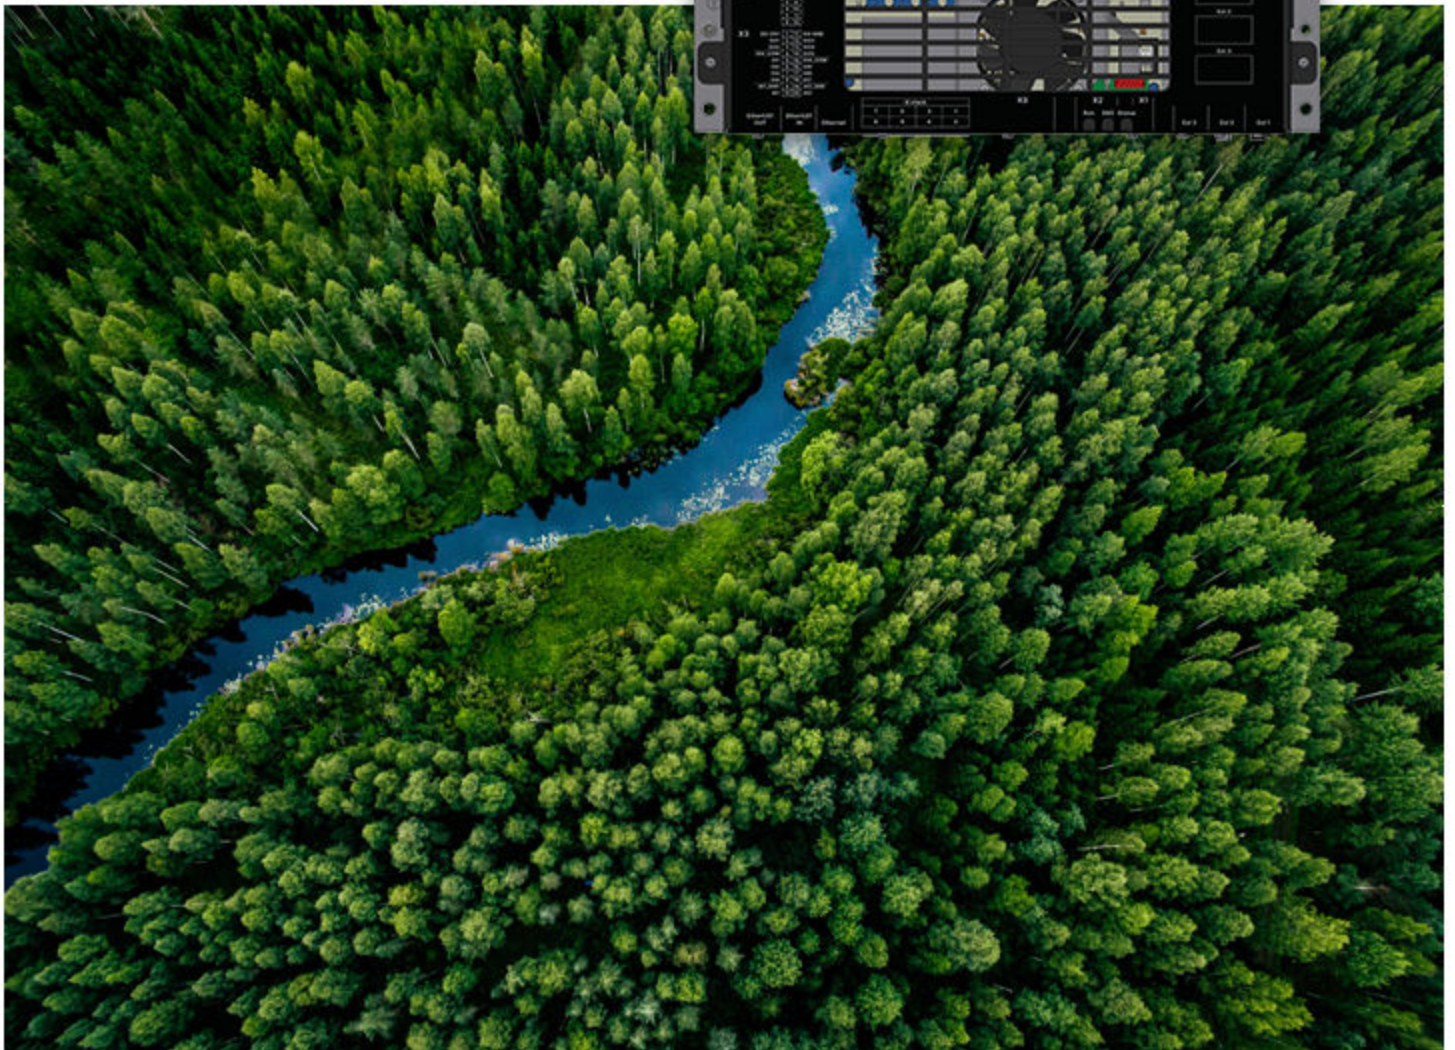

1. CU8 Control unit


1.1 About the CU8

The CU8 is a discrete control unit to control iE Convert power converters. One CU8 controller controls up to eight power converter building blocks.

The eight power converter building blocks can be arranged in two groups with different applications. The CU8 controller allows the power converters in the same group to run in parallel, for higher power capacity.


Controllers for CU8

The CU8 standard EtherCAT interface allows easy connectivity between the CU8 and other DEIF controllers and PLCs, such as the iE 250, iE 350, or iE 650. This enables scalability and easy integration of a variety of power sources, loads, and storage.

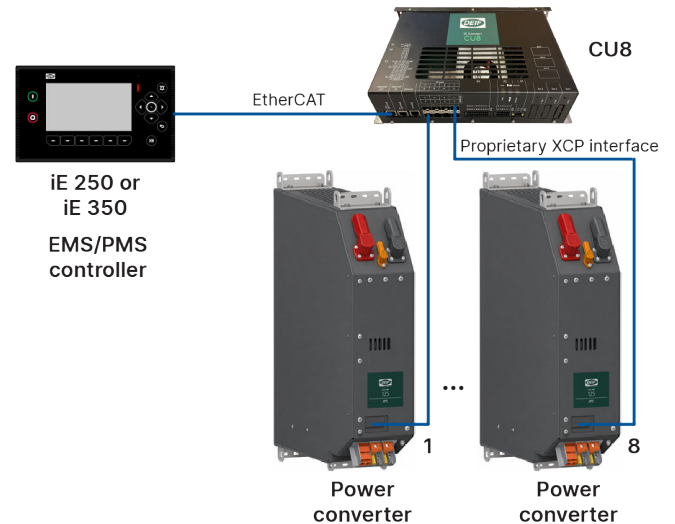

Complex solutions with redundancy

The controllers/PLCs, CU8s, and power converter building blocks can be combined to form energy systems. This includes flexible and complex solutions. The controllers/PLCs provide advanced cybersecurity capabilities, system redundancy*, and efficient energy and power management (EMS/PMS).

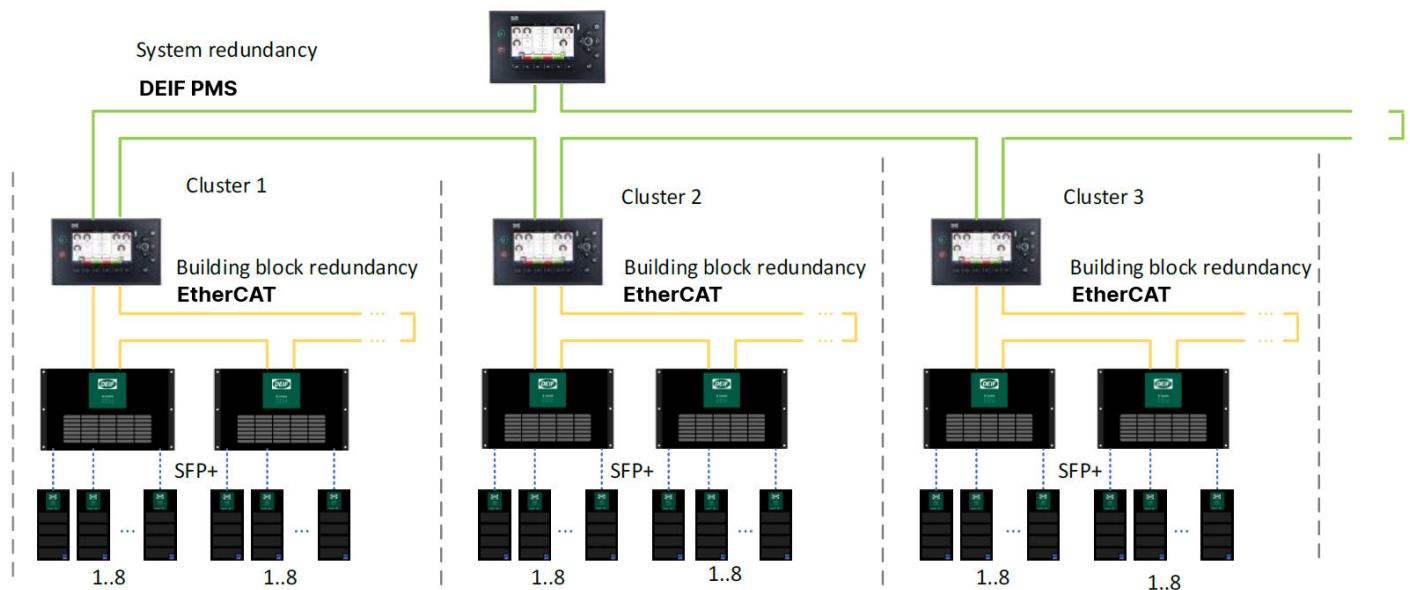

NOTE * If redundancy is required, use iE 350.


2. Technical specifications

2.1 Communication architecture





Communication

Connection	Diagram	Details																																								
EtherCAT		1 RJ45 10/100Mb, Port 0 – IN, Master Functionally isolated 1 RJ45 10/100Mb, Port 1 – OUT, Follower Functionally isolated																																								
Ethernet		1 RJ45 10/100Mb The Ethernet port is for future use. Functionally isolated, isolation voltage: 550 V																																								
iE stack		8 SFP+ 3.75 GHz, the interface to the power building blocks Only use transceivers from DEIF.																																								
X3	<table border="1"><tr><td>DO 24V</td><td>1</td><td>11</td><td>DO GND</td></tr><tr><td>DO1</td><td>2</td><td>12</td><td>DO3</td></tr><tr><td>DO2</td><td>3</td><td>13</td><td>DO4</td></tr><tr><td>DIA_COM</td><td>4</td><td>14</td><td>DO5</td></tr><tr><td>DI1</td><td>5</td><td>15</td><td>DIA_COM</td></tr><tr><td>DI2</td><td>6</td><td>16</td><td>DI5</td></tr><tr><td>DI3</td><td>7</td><td>17</td><td>DI6</td></tr><tr><td>DI4</td><td>8</td><td>18</td><td>DI7</td></tr><tr><td>AI1_GND</td><td>9</td><td>19</td><td>AI2_GND</td></tr><tr><td>AI1</td><td>10</td><td>20</td><td>AI2</td></tr></table>	DO 24V	1	11	DO GND	DO1	2	12	DO3	DO2	3	13	DO4	DIA_COM	4	14	DO5	DI1	5	15	DIA_COM	DI2	6	16	DI5	DI3	7	17	DI6	DI4	8	18	DI7	AI1_GND	9	19	AI2_GND	AI1	10	20	AI2	5 Digital outputs Digital outputs (terminals 2,3,12,13,14, GND on 11) Supply voltage: 24 V DC nominal Continuous output current (per channel): 0.5 A Short circuit protection >0.7 A High: 13 to 30 V Low: -30 to +5 V (with reference to common) Load: Typically 6 mA ($V_{in} > 7 V$) Isolation: Optically isolated from other potentials, 500 V AC 7 Digital bipolar inputs Digital bipolar inputs (terminals 5,6,7,8 (COM on 4); 16,17,18 (COM on 15)) Sourcing (24 V on common), or Sinking (GND on common) ON: -36 to -8 V DC, and 8 to 36 V DC Minimum pulse length: 50 ms Impedance: 4.7 kΩ Voltage withstand: ±36 V DC Functionally isolated in 2 groups, isolation voltage: 550 V 2 Analogue inputs Analogue inputs (terminals 10 (GND on 9); 20 (GND on 19)), configurable Voltage inputs: -10 V DC/0 to 10 V DC Current inputs: 0 to 20 mA, or 4 to 20 mA Impedance:
DO 24V	1	11	DO GND																																							
DO1	2	12	DO3																																							
DO2	3	13	DO4																																							
DIA_COM	4	14	DO5																																							
DI1	5	15	DIA_COM																																							
DI2	6	16	DI5																																							
DI3	7	17	DI6																																							
DI4	8	18	DI7																																							
AI1_GND	9	19	AI2_GND																																							
AI1	10	20	AI2																																							

Connection	Diagram	Details
		- Current mode: Maximum 50 Ω - Voltage mode: Minimum 10 kΩ Functionally isolated in 1 group, isolation voltage: 550 V
X1		Power in Nominal voltage: 24 V DC (operating range: 18 to 36 V DC) Power: 23 W Protected by a 4 A fuse
Ext [1 to 3]	Extension slots	3 extension slots The extension slots allow interfaces using a secure serial connection (for future use).

Connections

Connection	Diagram	Controller side	Connector side
EtherCAT		RJ45 with mag	-
Ethernet		RJ45 with mag	-
iE stack		2 x 4 SFP+ cage, from Amphenol®	-
X3		10 pos DMC PCB-base 3,50 Phoenix Contact	DFMC 1,5/10-ST-3,5-LR Phoenix Contact
X1		CC2,5/2-GF-5,08-LR P26THR Phoenix Contact	FKC 2,5/2-ST-5,08-LR Phoenix Contact
Ext [1 to 3]	-	-	-

AMPHENOL® is a registered trademark of Amphenol Corporation.

2.2 Human-machine interface (HMI)

Name	Function
Controller front	
Status (Status LED)	Green: Status OK
Run (EtherCAT status)	OFF: Initialisation Green blinking: Pre-operational Green single blink: Safe operational Green: Operational Green flickering: Boot loader
Communication (LINK/ACT) connections	
EtherCAT connection (RJ45)	Green: Connection OK
Ethernet connection (RJ45)	Green: Connection OK

Name	Function
	Yellow: Activity
iE Stack SFP+ connection (Enhanced small form-factor pluggable) (Link to a power converter)	Green: Link to power converter. Orange: Bad connection to the power converter. Red: Transceiver mounted.


Display with cybersecurity

If you connect iE 250, iE 350 or iE 650 to the CU8, you can use the iE 7 (the display for iE 250, iE 350, or iE 650) to view the operation of the power converter(s). This configuration can fulfil cybersecurity requirements.

Display without cybersecurity


You can connect a display directly to the CU8, but this does not fulfil cybersecurity requirements.

2.3 Dimensions and weight

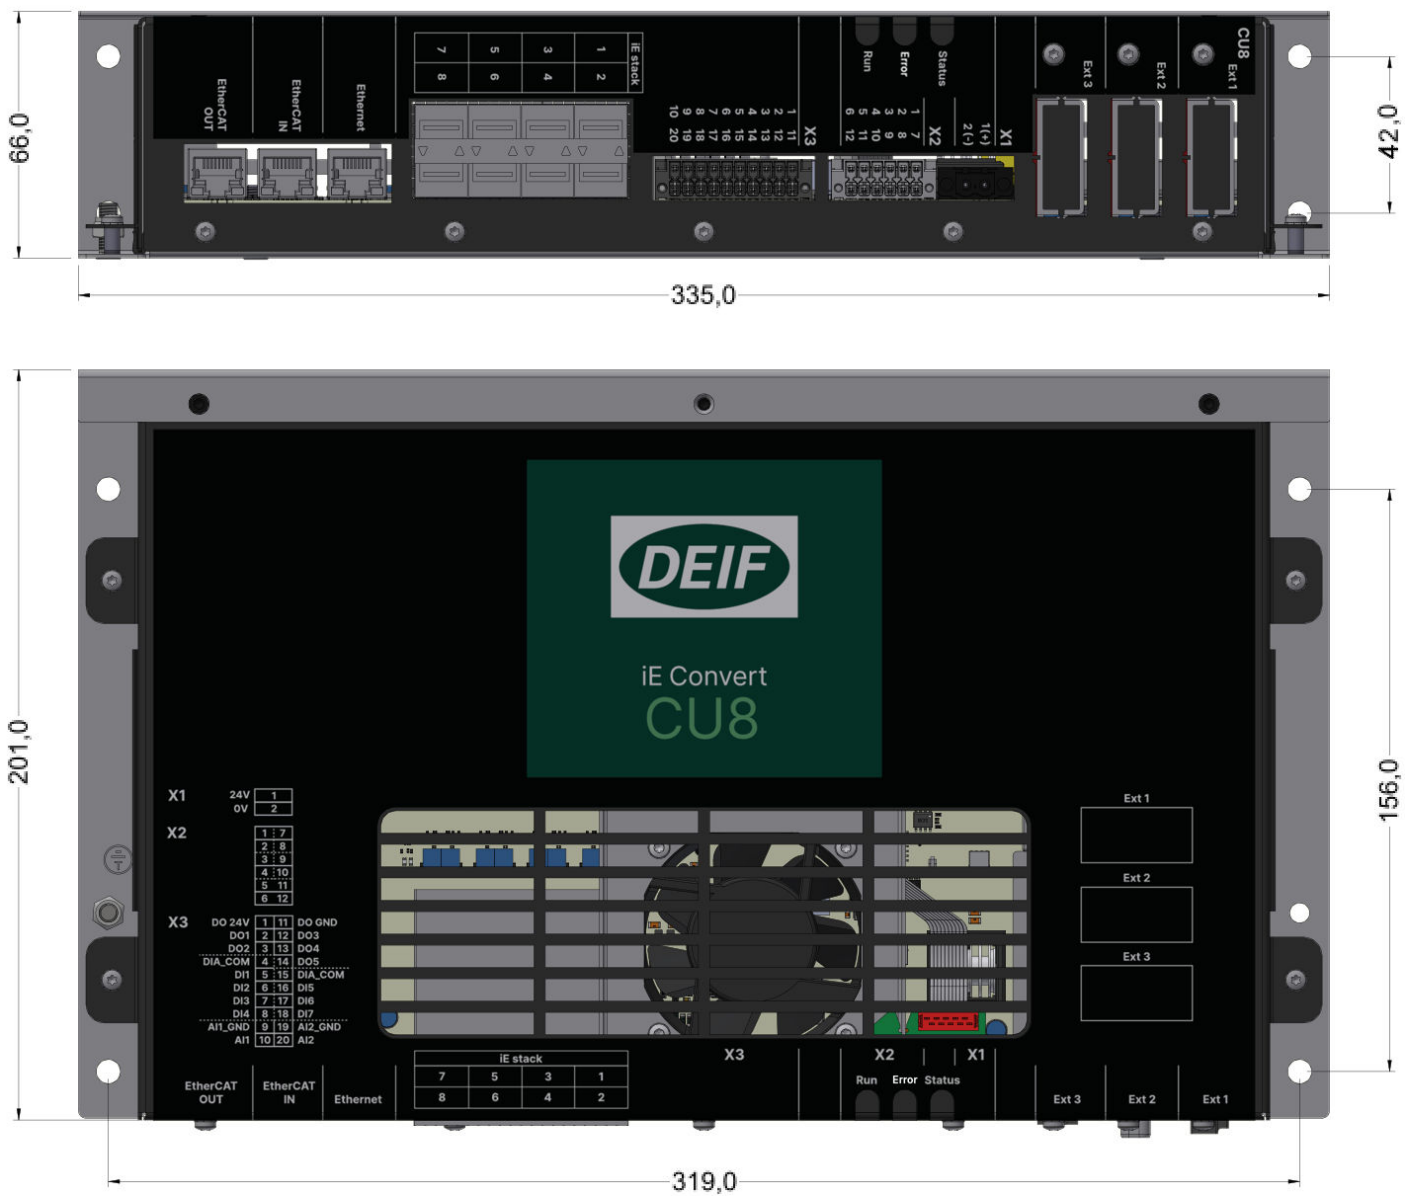

Dimensions and weight	
CU8 (W x H x D)	335 mm x 66 mm x 201 mm
Weight	~2 kg
Mounting holes	4 x 6.5 mm $\varnothing$ on the base (base mounting or DIN rail mounting) 4 x 6.5 mm $\varnothing$ on the back plate (vertical mounting)

2.4 Mounting

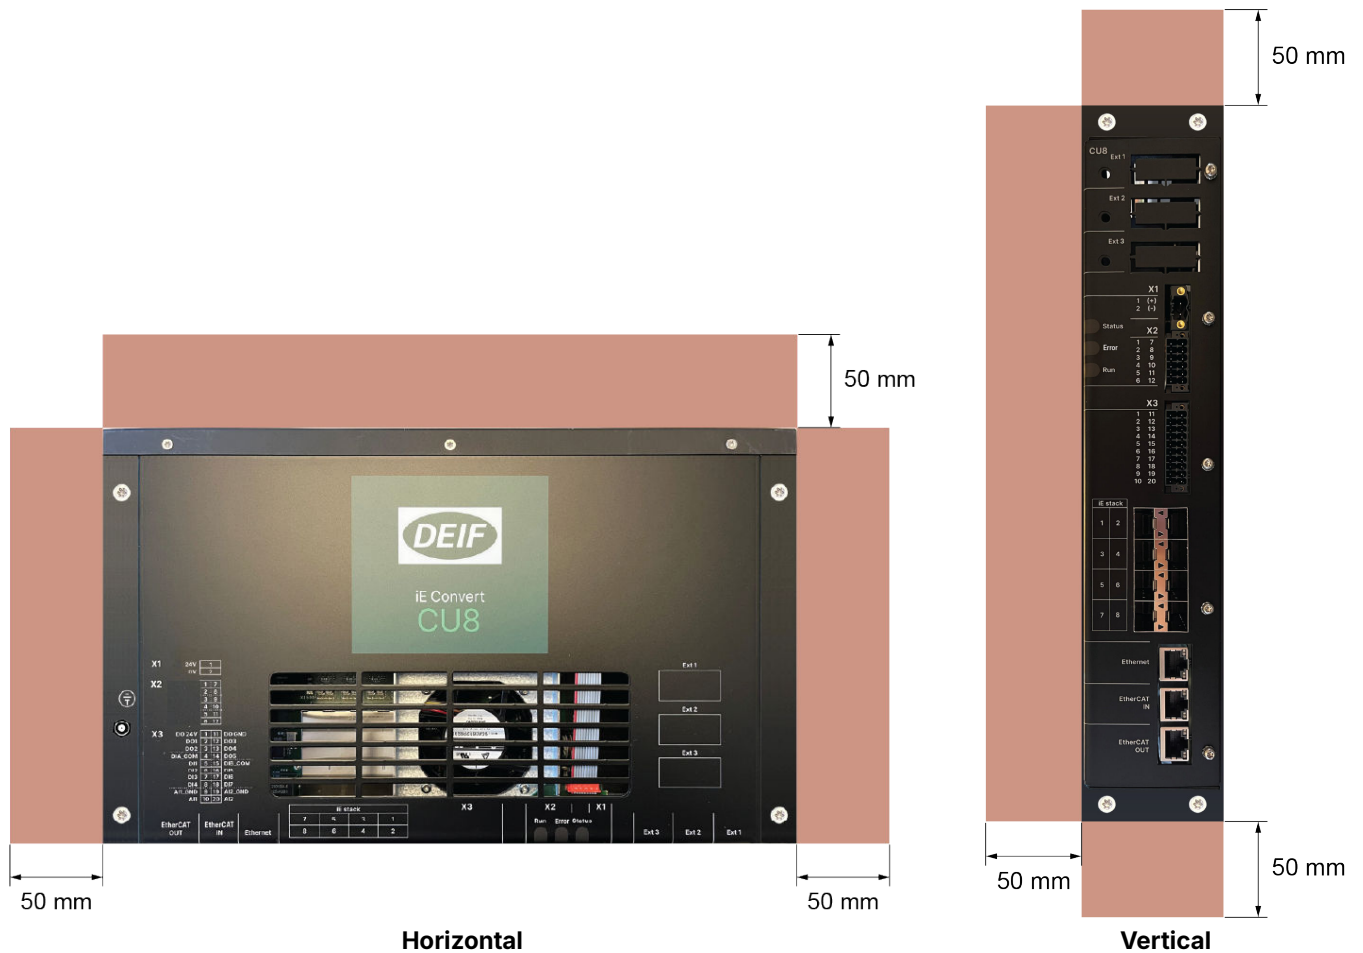

The space required for ventilation is shown in red.


- **Horizontal**
 - The connections are at the bottom.
 - Ventilation: There must also be at least 50 mm of free space in front of the CU8.
- **Vertical**
 - The connections are at the front.

3. Compatible products

3.1 iE Convert power converters

iE Convert power converters are available for a range of specifications and applications.


Modules

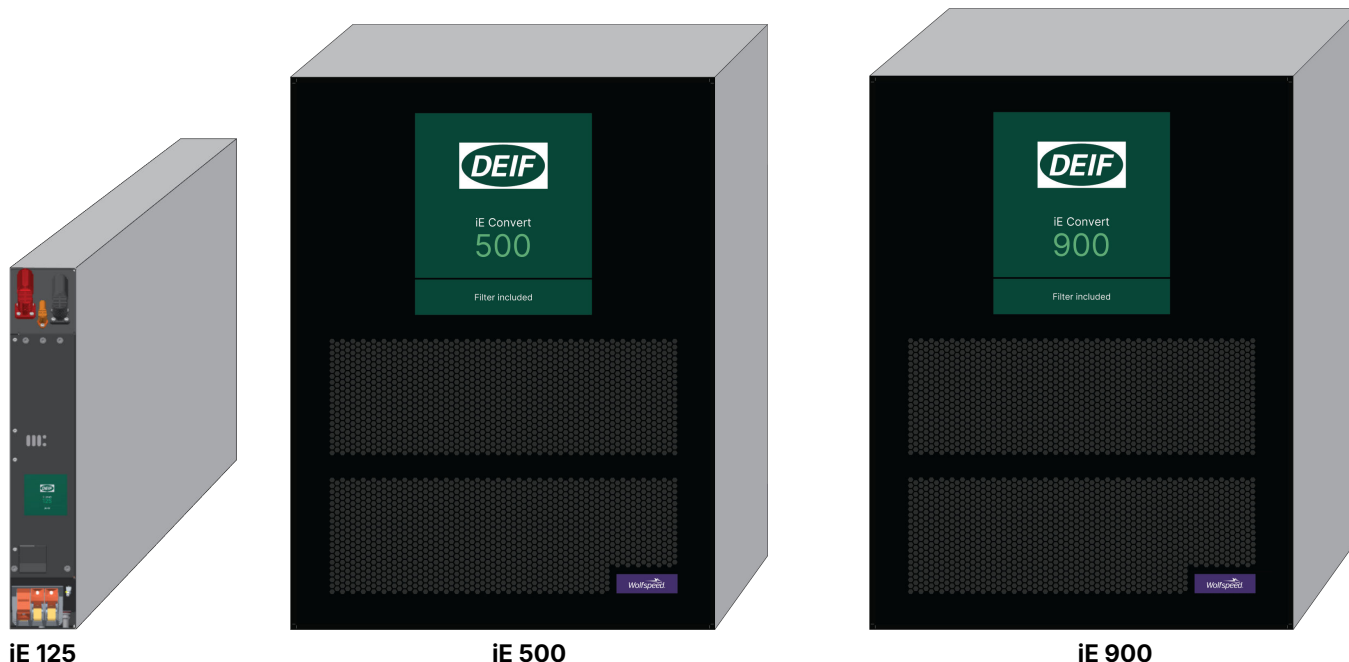

Applications



AC/DC
AFE



DC//DC
Galvanically isolated



AC/DC
Drive



DC/DC
Buck/boost

Voltage ratings

Maximum 850 V DC		Maximum 1500 V DC	
350 to 850 V DC	208 to 480 V AC	850 to 1500 V DC	400 to 690 V AC

3.2 Compatible equipment

Controllers with grid codes, power management and cybersecurity

- iE 250 www.deif.com/products/ie-250

Controllers with power management and cybersecurity

- iE 350 www.deif.com/products/ie-350
- iE 250 Marine www.deif.com/products/ie-250-marine
- iE 350 Marine www.deif.com/products/ie-350-marine

Controllers with grid codes and power management

- AGC-4 Mk II www.deif.com/products/agc-4-mk-ii

Controllers with power management

- iE 150 www.deif.com/products/ie-150
- iE 150 Marine www.deif.com/products/ie-150-marine
- AGC 150 www.deif.com/products/agc-150-generator

PLCs with cybersecurity

- iE 250 PLC www.deif.com/products/ie-250-plc/
- iE 350 PLC www.deif.com/products/ie-350-plc/
- iE 650 PLC www.deif.com/products/ie-650-plc/

Isolation monitoring

- DC networks, ADL-111Q96 www.deif.com/products/adl-111q96
- AC networks, AAL-2 www.deif.com/products/aal-2

DC voltage measurement

iE Measure

Protection relays

Medium voltage relays, MVR-200 series www.deif.com/products/mvr-200-series/

Other equipment

DEIF has a wide variety of other equipment that is compatible. Here are some examples:

- **Synchrosopes**
 - CSQ-3 (www.deif.com/products/csq-3)
- **Battery chargers/power supplies**
 - DBC-1 (www.deif.com/products/dbc-1)
- **Current transformers**
 - ASK (www.deif.com/products/ask-asr)
 - KBU (www.deif.com/products/kbu)
- **Transducers**
 - MTR-4 (www.deif.com/products/mtr-4)

4. Legal information

4.1 Disclaimer and copyright

Preliminary information

The product described in this document is still under development. All information is therefore preliminary.

Trademarks

DEIF and the DEIF logo are trademarks of DEIF A/S.

Bonjour® is a registered trademark of Apple Inc. in the United States and other countries.

Adobe®, *Acrobat*®, and *Reader*® are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States and/or other countries.

CANopen® is a registered community trademark of CAN in Automation e.V. (CiA).

SAE J1939® is a registered trademark of SAE International®.

EtherCAT®, *EtherCAT P*®, *Safety over EtherCAT*®, are trademarks or registered trademarks, licensed by Beckhoff Automation GmbH, Germany.

VESA® and *DisplayPort*® are registered trademarks of Video Electronics Standards Association (VESA®) in the United States and other countries.

Google® and *Google Chrome*® are registered trademarks of Google LLC.

Modbus® is a registered trademark of Schneider Automation Inc.

Windows® is a registered trademark of Microsoft Corporation in the United States and other countries.

All trademarks are the properties of their respective owners.

Copyright

© Copyright DEIF A/S. All rights reserved.

Disclaimer

DEIF A/S reserves the right to change any of the contents of this document without prior notice.

The English version of this document always contains the most recent and up-to-date information about the product. DEIF does not take responsibility for the accuracy of translations, and translations might not be updated at the same time as the English document. If there is a discrepancy, the English version prevails.