


# iE 250

Intelligent energy controller

## Data sheet



Improve  
Tomorrow

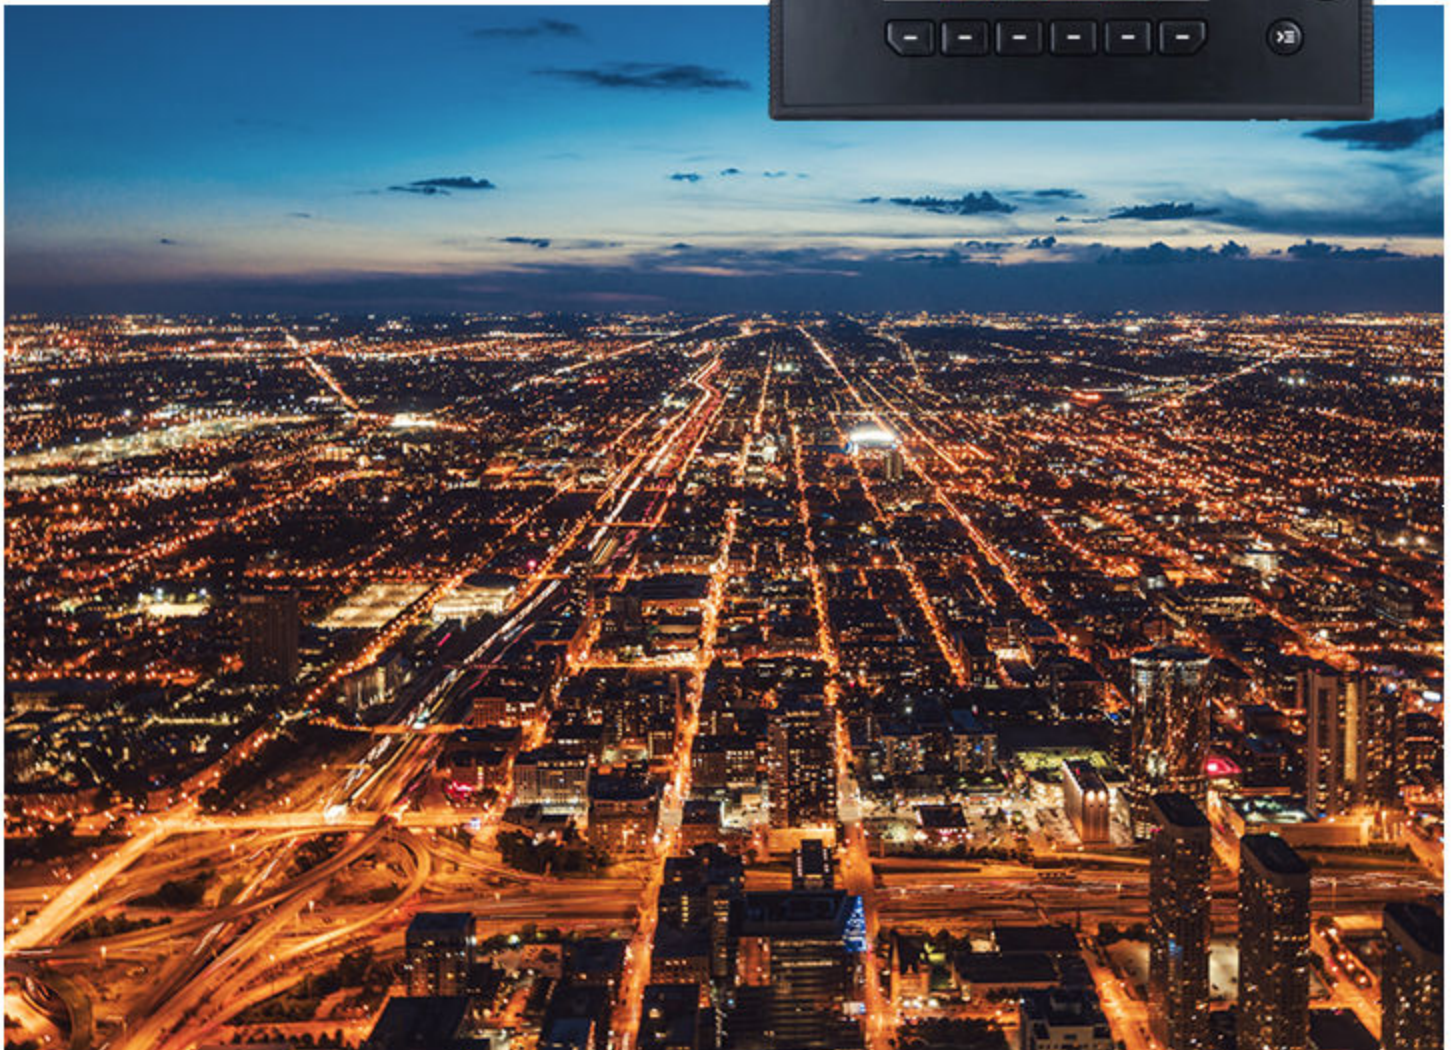

## 1. Intelligent energy controller

<b>1.1 About the controller</b>	<b>4</b>
1.1.1 Licences and supported features	4
1.1.2 About the controller types	4
1.1.3 Need more information?	6
1.1.4 Software versions	7
1.1.5 Display layout	8
1.1.6 Emulation	8
<b>1.2 Functions and features</b>	<b>9</b>
1.2.1 Software licences	9
1.2.2 General functions and features	9
<b>1.3 Alarms and protections</b>	<b>14</b>
1.3.1 Alternating current (AC) protections	14
<b>1.4 Applications</b>	<b>17</b>
1.4.1 Applications	17
1.4.2 Extension rack functions	18
<b>1.5 Compatible products</b>	<b>18</b>
1.5.1 Power management	18
1.5.2 DEIF digital voltage controllers (DVC)	19
1.5.3 Additional inputs and outputs	19
1.5.4 Remote monitoring service: Insight	20
1.5.5 Other equipment	20

## 2. Technical specifications

<b>2.1 Dimensions</b>	<b>21</b>
2.1.1 Front mounted controller with MIO2.1	21
2.1.2 Base mounted controller with MIO2.1	22
2.1.3 iE 7 Local display	23
2.1.4 Plug-in module for 8 Digital bi-directional channels	24
2.1.5 Plug-in module for 4 Analogue bi-directional channels	25
<b>2.2 Mechanical specifications</b>	<b>26</b>
2.2.1 Front mounted controller with MIO2.1	26
2.2.2 Base mounted controller with MIO2.1	27
2.2.3 iE 7 Local display	28
<b>2.3 Environmental specifications</b>	<b>29</b>
2.3.1 Front mounted controller with MIO2.1	29
2.3.2 Base mounted controller with MIO2.1	29
2.3.3 iE 7 Local display	29
<b>2.4 Controller</b>	<b>31</b>
2.4.1 Terminal connections	31
2.4.2 Electrical specifications	31
2.4.3 Communication specifications	33
<b>2.5 iE 7 Local display</b>	<b>34</b>
2.5.1 Terminal connections	34
2.5.2 Electrical specifications	34
2.5.3 Communication specifications	34
<b>2.6 Measurement Input Output module (MIO2.1)</b>	<b>36</b>
2.6.1 About	36
2.6.2 Terminal connections	36
2.6.3 Electrical specifications	37

2.6.4 Communication specifications.....	39
<b>2.7 Plug-in module for 8 Digital bi-directional channels.....</b>	<b>40</b>
<b>2.8 Plug-in module for 4 Analogue bi-directional channels.....</b>	<b>41</b>
<b>2.9 Accessories.....</b>	<b>42</b>
2.9.1 DIN rail clamps.....	42
2.9.2 USB type A to C cable.....	42
2.9.3 DisplayPort cable.....	42
2.9.4 Ethernet cable.....	42
<b>2.10 Approvals.....</b>	<b>43</b>
<b>2.11 Cybersecurity.....</b>	<b>43</b>
<b>3. Legal information</b>	
<b>3.1 Disclaimer and copyright.....</b>	<b>44</b>

# 1. Intelligent energy controller

## 1.1 About the controller

### 1.1.1 Licences and supported features

The supported features shown in this document depend on the software licence installed.

The standard license is the **Core** licence including synchronising and load share, and support. Alternatively, you can select the **Premium** licence, which includes power management features and support.




#### Example

Controllers with the Power management licence can be included in a power management system. A power management system can include a number of controllers. The controllers work together to ensure effective power management. This can include load-dependent start and stop, and may include setting the genset priority order, managing heavy consumers, and, if necessary, tripping non-essential loads.


### 1.1.2 About the controller types

The iE 250 is a versatile and modular-designed controller for land. Its design enables you to tailor the installation to your needs.

Front mounted controller  
with combined display

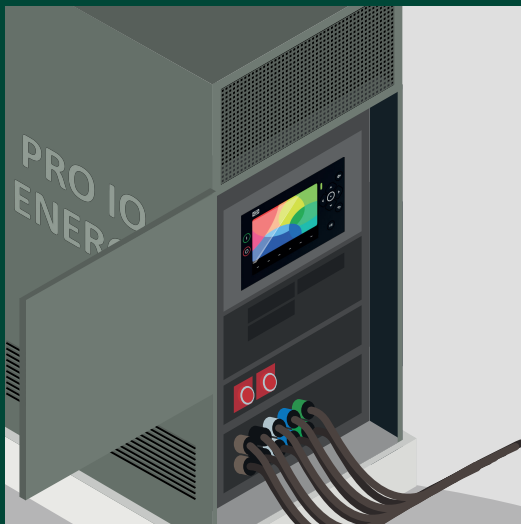

Base mounted controller  
with or without local display

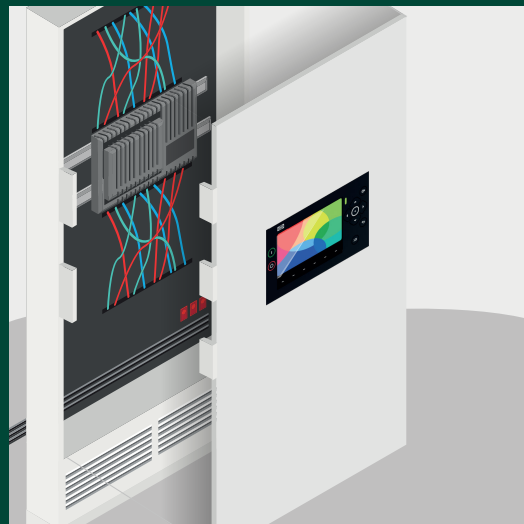

An extensive range of control, protection and supervision features. Applications range from generator control and protection to engineered energy management solutions with our market-leading fuel optimisation technology.

The supported features depend on the software licence installed.

Each controller is assigned a type from the factory. You can see the type of controller on the single-line application drawing.


Controller type	Controls and protects
Single genset controller	<ul style="list-style-type: none"> <li>• A prime mover, generator, generator breaker, mains connection, and mains breaker</li> <li>• A prime mover, generator, generator breaker, and mains connection</li> <li>• A prime mover, generator, and generator breaker</li> </ul>
Genset controller	A prime mover, generator, and generator breaker.
Mains controller	<ul style="list-style-type: none"> <li>• A mains connection, and mains breaker.</li> <li>• A mains connection, mains breaker, and a tie breaker.</li> </ul>
Bus tie breaker controller	A bus tie breaker.

### 1.1.3 Need more information?


Get direct access to the resources that you need by using the links below.




Official DEIF homepage.



See all the related iE 250 documentation.




Self-help resources and how to contact DEIF for assistance.




iE 250 product page.



Download the latest software.



Learn how to use this product.




Help improve our documentation with your feedback.

**NOTE** \* To view a 3D PDF you must enable multimedia and 3D content in your PDF viewer.

#### DWG Drawings



[www.deif.com/rtd/ie250fmm/dwg](http://www.deif.com/rtd/ie250fmm/dwg)



[www.deif.com/rtd/ie250bmm/dwg](http://www.deif.com/rtd/ie250bmm/dwg)




[www.deif.com/rtd/ie250bm/dwg](http://www.deif.com/rtd/ie250bm/dwg)




[www.deif.com/rtd/ie7/dwg](http://www.deif.com/rtd/ie7/dwg)

---

#### STP STEP-file



[www.deif.com/rtd/ie250fmm/stp](http://www.deif.com/rtd/ie250fmm/stp)



[www.deif.com/rtd/ie250bmm/stp](http://www.deif.com/rtd/ie250bmm/stp)




[www.deif.com/rtd/ie250bm/stp](http://www.deif.com/rtd/ie250bm/stp)




[www.deif.com/rtd/ie7/stp](http://www.deif.com/rtd/ie7/stp)

---


## 2D PDF



[www.deif.com/rtd/ie250fmm/2dpdf](http://www.deif.com/rtd/ie250fmm/2dpdf)



[www.deif.com/rtd/ie250bmm/2dpdf](http://www.deif.com/rtd/ie250bmm/2dpdf)



[www.deif.com/rtd/ie250bm/2dpdf](http://www.deif.com/rtd/ie250bm/2dpdf)



[www.deif.com/rtd/ie7/2dpdf](http://www.deif.com/rtd/ie7/2dpdf)


---

## 3D PDF


To view a 3D PDF you must enable multimedia and 3D content in your PDF viewer.



[www.deif.com/rtd/ie250fmm/3dpdf](http://www.deif.com/rtd/ie250fmm/3dpdf)



[www.deif.com/rtd/ie250bmm/3dpdf](http://www.deif.com/rtd/ie250bmm/3dpdf)



[www.deif.com/rtd/ie250bm/3dpdf](http://www.deif.com/rtd/ie250bm/3dpdf)



[www.deif.com/rtd/ie7/3dpdf](http://www.deif.com/rtd/ie7/3dpdf)

### 1.1.4 Software versions


The information in this document relates to software versions:







Software	Details	Version
iE 250 Core iE 250 Premium	Controller application	2.0.11.x
CODESYS libraries	CODESYS	2.0.11.x
PICUS	PC software	1.0.24.x

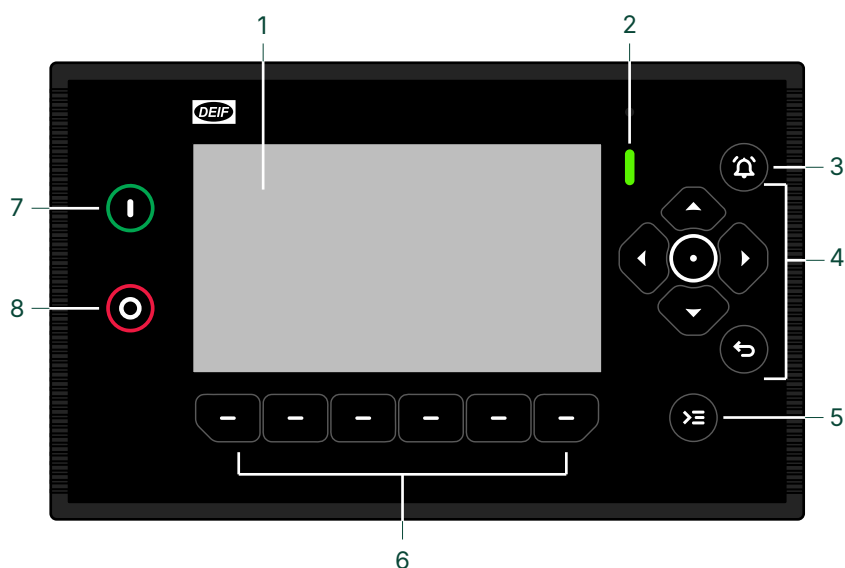

## 1.1.5 Display layout

The base-mounted controller can run with or without a display, but we recommend that you use an iE 7 display. The display is the operator's interface to the controller.



No.	Item	Notes
1	Display screen	7" colour touch screen.
2	Status LED	Multi-colour LED for status indication.
3	 Notification centre button	Silences the alarm horn (deactivates the output), and opens the <b>Notification centre</b> , which shows alarms and events.
4	Navigation buttons	Up, down, left, and right arrows.
	 Enter button	Confirms the selection.
	 Back button	<ul style="list-style-type: none"> <li>Returns to the previous page</li> <li>Shows the menu.</li> <li>Hold: Change to Dashboard</li> </ul>
5	 Control centre button	Opens the <b>Control centre</b> .
6	Configurable buttons	Buttons can be activated either by pressing the physical button or the soft key on the screen. *
7	 Start button	In manual or local operation, it starts the asset. In a Power management system and in AUTO mode, it starts the Power management.
8	 Stop button **	In manual or local operation, it stops the asset. In a Power management system and in AUTO mode, it stops the Power management.

**NOTE** \* Dashboard pages can be created, copied and modified, to assign different functions to the buttons (with PICUS and the Display designer).

\*\* Double press to override cooldown process. Press again to cancel **Idle run**, if configured.

## 1.1.6 Emulation

iE 250 includes an emulation tool to verify and test the functionality of the application, for example plant modes and logic, breaker handling, mains and generator operation.



Application emulation is useful for training, customising plant requirements and for testing basic functionality that needs to be set up or verified.

In a power management system it is possible to control the entire plant, when connected to just one of the controllers.

## 1.2 Functions and features

### 1.2.1 Software licences

The supported features depend on the software licence installed.

The standard license is the **Core** licence synchronising and load share, and support. Alternatively, you can select the **Premium** licence, which includes power management features and support.

### 1.2.2 General functions and features

Modular and configurable design	
<b>Mounting choices</b>	Choice of either: <ul style="list-style-type: none"> <li>• Front mounted.</li> <li>• Base mounted.</li> </ul>
<b>Display</b>	iE 7 Local display <ul style="list-style-type: none"> <li>• For base mounted.</li> </ul> Remote display <ul style="list-style-type: none"> <li>• For base or front mounted.</li> </ul>
<b>New design - easy mount</b>	Front mount controller or display has same cut-out footprint as the iE 150 and AGC 150.
<b>Easy expansion</b>	<b>Add-on modules</b> <ul style="list-style-type: none"> <li>• Measurement Input Output module MIO2.1.</li> </ul> <b>Plug-in modules</b> <ul style="list-style-type: none"> <li>• 8 Digital bi-directional channels.</li> <li>• 4 Analogue bi-directional channels.</li> </ul> <b>Additional input/output possibilities</b> <ul style="list-style-type: none"> <li>• ML 300 series modules.</li> <li>• iE 650 series modules.</li> </ul>

Load control features	
<b>Control modes</b>	LOCAL (commands from display push-buttons) REMOTE (commands from digital inputs, PICUS, Modbus, CustomLogic, CODESYS)
<b>Load control</b>	Communication over the DEIF network Ethernet. Genset controllers can have equal load sharing. Genset controllers can do asymmetrical load sharing. Genset controllers can synchronise/de-load Mains and BTB controllers. External breaker position feedback. Automatic detection of load sharing busbar sections (including for a ring busbar).

Power management features	
<b>Plant modes</b>	<ul style="list-style-type: none"> <li>• Automatic mains failure</li> <li>• Fixed power</li> <li>• Peak shaving</li> <li>• Load take-over</li> </ul>

Power management features	
	<ul style="list-style-type: none"> <li>Mains power export</li> </ul>
<b>Genset modes</b>	<ul style="list-style-type: none"> <li>Power management</li> <li>Island mode</li> </ul>
<b>Power management operation</b>	<p>CAN bus-based power management:</p> <ul style="list-style-type: none"> <li>Control up to 32 generator, mains and/or tie breakers <ul style="list-style-type: none"> <li>Up to 32 GENSET and/or MAINS controllers</li> </ul> </li> <li>Up to 8 bus tie breakers on the generator bus or load bus</li> </ul>
<b>Load control</b>	<p>Load control between controllers up to 32 assets.</p> <p>Load control between iE 250 and other DEIF controllers up to 16 gensets.</p> <p>Genset controllers can do asymmetrical load sharing.</p> <p>Genset controllers can synchronise/de-load Mains and BTB controllers.</p> <p>Automatic detection of load sharing busbar sections (including for a ring busbar).</p>
<b>Priority selection</b>	<ul style="list-style-type: none"> <li>Relative, absolute, and manual *</li> <li>Running hours</li> <li>Fuel optimisation</li> </ul>
<b>Additional features</b>	<p>Generator load-dependent start and stop</p> <p>Ready for solar and battery *</p> <p>Asymmetrical generator load sharing</p> <p>N + X</p> <p>Safety stop of generator</p> <p>Flexible application</p>

**NOTE** \* Contact DEIF for availability.

Application	
<b>Single-line application drawing</b>	Flexible applications.
<b>Busbar</b>	Busbar can have a ring connection.
<b>Breakers</b>	<p>Redundant breaker feedback on bus tie breakers.</p> <p>Externally controlled breakers.</p>

AC configuration features	
<b>Nominal settings</b>	4 sets of settings.
<b>AC configuration</b>	<p>Three-phase</p> <p>Split-phase L1L2</p> <p>Split-phase L1L3</p> <p>Single phase L1</p>
<b>4th current</b>	Measurement for earth or neutral protections, or mains power.
<b>Additional features</b>	<ul style="list-style-type: none"> <li>100 to 690 V AC (selectable)</li> <li>CT -/1 or -/5 (selectable)</li> </ul>

General functions	
<b>Regulation</b>	<p><b>Governor:</b></p> <ul style="list-style-type: none"> <li>Active power load sharing</li> <li>Fixed frequency</li> <li>Fixed active power</li> </ul>

## General functions

	<ul style="list-style-type: none"> <li>• Frequency droop</li> <li>• Fixed RPM</li> </ul> <p><b>AVR:</b></p> <ul style="list-style-type: none"> <li>• Reactive power load sharing</li> <li>• Fixed voltage</li> <li>• Fixed reactive power</li> <li>• Fixed cos phi</li> <li>• Voltage droop</li> </ul> <p>General purpose PID regulators Three sets of temperature-dependent power derate settings. Set point selection using digital input, Modbus, and/or CustomLogic or CODESYS. Configurable power ramp up, power ramp down</p>
<b>Pre-programmed sequences</b>	<p><b>Generator: *</b> Generator start and stop.</p> <p><b>Breaker:</b> Breaker open sequence (with and without de-loading). Breaker close sequence (with synchronisation). Blackout close (black busbar negotiation)</p>
<b>Synchronisation</b>	<p>Automatic synchronisation and de-loading. Operator-initiated synchronisation and de-loading possible. Choose between Static or Dynamic synchronisation. De-load before opening.</p>
<b>Breaker control</b>	<p>Breaker types (with configurable parameters): Pulse breaker. Breaker position detection and alarms.</p>
<b>Configurable Idle run **</b>	<p>Protect the engine with additional warm-up or cooldown periods.</p>
<b>Advanced troubleshooting</b>	<p>Controller self-test. Event and alarm log, with real-time clock.</p>
<b>Event log</b>	<p>The controller stores a maximum of 2000 log entries. When the log is full, the controller discards the excess log entries using first in, first out.</p>
<b>User management</b>	<p>Configurable permission roles and users.</p>
<b>AC measurements</b>	<p>AC measurements can be configured with average filters for use on noisy or oscillating systems for the displayed information. Controller data and calculations are not affected. Actual values are always used for the calculations and protections. Choice of <i>No filters</i>, or <i>average over a selected time</i> (200 or 800 milliseconds).</p>
<b>CPU load overview</b>	<p><i>Currently, Average over 10 seconds. Average over 1 minute, or Average over 10 minutes.</i></p>
<b>CODESYS</b>	<p>Option: Extended controller functionality with soft PLC. CODESYS runtime. Custom information pop-up messages and status texts. Provide better customised user experience by delivering messaging and status information from the CODESYS application. View CODESYS license type in WebConfig.</p>
<b>Additional hardware/software features</b>	<p>Power supply voltage measurement diode offset. Output configuration (function, coil state). Analogue input sensor failure (below and above range). Analogue input pre-configured curves, plus up to 20 customisable curves. Analogue output pre-configured curves, plus up to 20 customisable curves.</p>

**NOTE** \* Generator controllers only.

\*\* Supported engines only. See the [Engine interface communication manual](#) for the supported J1939 engines and manufacturers.

Display	
<b>Easy and user-friendly interface</b>	Easy control with customisable dashboards. Adaptive mimics. Configurable physical buttons. 7" colour touch screen that can be used in combination with physical buttons.
<b>Fast short-cut button</b>	Configurable shortcut feature gives the user easy access to frequently used functions.

Communication	
<b>Plug and play</b>	Automatic network configuration (uses static IPv6). Automatic date and time synchronisation between all controllers in the system. NTP time synchronisation with NTP servers.
<b>Redundancy</b>	Redundant CAN bus for Power management.
<b>Ethernet communication</b>	<ul style="list-style-type: none"><li>Secured protocols on Ethernet communication.</li><li>Static Internet Protocol version 6 (IPv6).</li><li>Configurable Internet Protocol version 4 (IPv4).</li><li>Alarms for Unknown traffic and Data loss.</li></ul>
<b>CAN bus communication</b>	3 CAN ports for: <ul style="list-style-type: none"><li>Power management.</li><li>J1939-based ECU communication.</li><li>Communication to Digital AVR:<ul style="list-style-type: none"><li>DVC 350.</li><li>DVC 550.</li><li>Leroy Somer D550.</li></ul></li></ul>
<b>RS-485 communication *</b>	2 serial ports configurable as client or server.
<b>Modbus server</b>	Supports multiple Modbus protocols: TCP/IP, RTU. * Standard protocol: Modbus server, TCP/IP.

**NOTE** \* For future use.



#### More information

See the [Engine interface communication manual](#) for the supported J1939 engines and manufacturers.

Configuration tool - PICUS	
<b>General features</b>	PC software to connect to one or more controllers. Application design (Single-line diagram) tool for creation, configuration and broadcast. Updated firmware for the controller and display. Supports multiple controller languages. Backup / restore projects or configurations. Commissioning tools.
<b>Display designer</b>	For creation and configuration on the display: Dashboard layout and widgets. Header design and widgets.
<b>Controller configuration</b>	Configure controller inputs, outputs, and parameters. View status and live data. Manage backups and restores.

Configuration tool - PICUS	
	Use offline projects to view or edit a controller configuration.
<b>System emulation</b>	Safely mimic the environment that the controller connects to (loads, inputs, and failure scenarios).
<b>System supervision</b>	Supervise and control the application.
<b>Alarms and log events</b>	Manage alarms. Run alarm tests. View event logs and J1939 DM2 logs (if ECU enabled).
<b>Input / output status</b>	See an overview for all the input and output values for the controller, extension racks, and ECU (if configured).
<b>Trending</b>	Record and save operational values over a period of time. Export recorded trace values to a .csv file.
<b>Tags</b>	Show or hide Tags for Alarm pop-up, alarms, log, parameters, and reports.
<b>Permission control</b>	Role and user management.
<b>CustomLogic</b>	User-friendly logic configuration tool, based on ladder logic and function blocks. Selectable input events and output commands per controller. Inter-controller communication with each controller in the system. (For compatible controllers). Modbus signals (inputs and/or outputs).

WebConfig	
<b>WebConfig</b>	A browser-based tool to connect to the controller IP address. View controller information. Manage cybersecurity configuration. If required, restart the controller or do a factory reset.

## 1.3 Alarms and protections

### 1.3.1 Alternating current (AC) protections

The controllers include the following alternating current (AC) protections, according to IEEE Std. C37.2™-2008.

The *operate time* is defined in IEC 447-05-05 (from the instant when the need for the protection arises, to when the controller output has responded). For each protection, the *operate time* is given for the minimum user-defined time delay.

All AC alarms are available on all controller types, unless noted in the alarm column.

Controller type	A-side	B-side
<b>SINGLE genset</b>	Generator	Mains
<b>GENSET</b>	Generator	Busbar
<b>MAINS</b>	Mains	Busbar
<b>BUS TIE breaker</b>	Busbar A	Busbar B

#### AC protections for the A-side

Protection	Alarms	IEC symbol (IEC 60617)	ANSI (IEEE C37.2)	Operate time	Based on
Over-voltage	2	U>	59	< 100 ms	The highest phase-to-phase (or phase-to-neutral) voltage
Under-voltage	3	U<	27	< 100 ms	The lowest phase-to-phase (or phase-to-neutral) voltage
Voltage unbalance (voltage asymmetry)	1	UUB>	47	< 200 ms *	The highest difference between any of the 3 phase-to-phase (or phase-to-neutral) voltage true RMS values, and the average value
Positive sequence under-voltage	1	U <sub>1</sub> <	27D	< 60 ms ***	The estimated phase-to-neutral voltage phasors
Negative sequence voltage	1	U <sub>2</sub> >	47	< 200 ms *	The estimated phase-to-neutral voltage phasors
Zero sequence voltage	1	U <sub>0</sub>	59U <sub>0</sub>	< 200 ms *	The estimated phase-to-neutral voltage phasors
Over-current	4	3I>	50TD	< 100 ms	The highest phase current true RMS value
Fast over-current (short circuit)	2	3I>>>	50/50TD	< 50 ms	The highest phase current true RMS value
Current unbalance (average)	1	IUB>	46	< 200 ms *	The highest difference between any of the 3 phase currents and the average value
Current unbalance (nominal)	1	IUB>	46	< 200 ms *	The highest difference between any of the 3 phase currents and the nominal value
Directional over- current	2 **	I> →	67	< 100 ms	The highest phase current true RMS value, with the direction from the active power
Inverse time over- current	1	It>	51	-	The highest phase current true RMS value, based on IEC 60255 part 151

Protection	Alarms	IEC symbol (IEC 60617)	ANSI (IEEE C37.2)	Operate time	Based on
Negative sequence current	1	$I_2 >$	46	< 200 ms *	The estimated current phasors
Zero sequence current	1	$I_0 >$	51I <sub>0</sub>	< 200 ms *	The estimated current phasors
Over-frequency	3	$f >$	81O	< 100 ms	The lowest fundamental frequency of a phase voltage
Under-frequency	3	$f <$	81U	< 100 ms	The highest fundamental frequency of a phase voltage
Overload (power export)	5	$P >$	32	< 100 ms	The active power (all phases)
Reverse power (power import)	2	$P <$	32R	< 100 ms	The active power (all phases)
Over-excitation (reactive power export)	2	$Q >$	40O	< 100 ms	The reactive power (all phases)
Under-excitation (reactive power import/ loss of excitation)	2	$Q <$	40U	< 100 ms	The reactive power (all phases)
Active synchroniser (including blackout close)	Not an alarm	-	25A	-	The frequency difference, the voltage difference, and the phase across the breaker

**NOTE** \* These operate times include the minimum user-defined delay of 100 ms.

\*\* The **BUS TIE breaker** controller has 4 directional-over current alarms.

\*\*\* This operate time includes the minimum user-defined delay of 20 ms.

## AC protections for the B-side

Protection	Alarms	IEC symbol (IEC 60617)	ANSI (IEEE C37.2)	Operate time	Based on
Over-voltage	3	$U >$	59	< 50 ms	The highest phase-to-phase (or phase-to-neutral) voltage
Under-voltage	4	$U <$	27	< 50 ms	The lowest phase-to-phase (or phase-to-neutral) voltage
Voltage unbalance (voltage asymmetry)	1	$UUB >$	47	< 200 ms *	The highest difference between any of the 3 phase-to-phase (or phase-to-neutral) voltage true RMS values, and the average value
Positive sequence under-voltage	1	$U_1 <$	27D	< 60 ms **	The estimated phase-to-neutral voltage phasors
Negative sequence voltage	1	$U_2 >$	47	< 200 ms *	The estimated phase-to-neutral voltage phasors
Zero sequence voltage	1	$U_0$	59U <sub>0</sub>	< 200 ms *	The estimated phase-to-neutral voltage phasors
Over-frequency	3	$f >$	81O	< 50 ms	The lowest fundamental frequency of a phase voltage
Under-frequency	4	$f <$	81U	< 50 ms	The highest fundamental frequency of a phase voltage

**NOTE** \* This operate time includes the minimum user-defined delay of 100 ms.



\*\* This operate time includes the minimum user-defined delay of 20 ms.

### AC protections for the A-side or the B-side \*

Protection	Alarms	IEC symbol (IEC 60617)	ANSI (IEEE C37.2)	Operate time	Based on
Vector shift	1	$d\phi/dt$	78	< 40 ms	Individual phase mode: At least one phase shows vector shift. All phases mode: All phases show vector shift.
ROCOF (df/dt)	1	df/dt	81R	< 200 ms or 12 half periods (whichever is greater)	The rate of change of the fundamental frequency of the 3-phase voltage system.
V< and Q<	2	U< Q<	27Q	< 250 ms	The highest phase-to-phase (or phase-to-neutral) voltage; the reactive power (all phases) and the highest phase current true RMS value.
Average over-voltage	2	-	59AVG	-	The RMS phase-to-phase (or phase-to-neutral) voltage, averaged over a minimum of 30 s (configurable).

**NOTE** \* These protections can be configured for either the A-side or the B-side.

### Other AC protections for the A-side

Protection	Alarms	IEC symbol (IEC 60617)	ANSI (IEEE C37.2)	Operate time	Based on
Earth inverse time over-current	1 *		51G	-	The current RMS value, measured by the 4th current measurement, filtered to attenuate the third harmonic (at least 18 dB).
Neutral inverse time over-current	1 *		51N	-	The current RMS value, measured by the 4th current measurement.

**NOTE** \* These protections each need the 4th current measurement. You can therefore only use one of these protections.

### Other features

Feature	IEC symbol (IEC 60617)	ANSI (IEEE C37.2)	Operate time	Based on
Lockout relay		86	-	Protected equipment. Alarms can be configured with a Latch, which remain active until the operator resets the latch.



We would love to hear from you.

Help us improve our documentation by giving us feedback.

[Click here](#)

## 1.4 Applications

### 1.4.1 Applications

With power management, the controller can handle simple or advanced applications for a variety of power plant projects. Applications include synchronising generators, critical power, emergency standby, and power production.

CAN bus based power management:

- 32 prime movers and generators (gensets)/mains with breakers.
- 8 bus tie breakers on the generator bus or load bus.
- 16 automatic sustainable controllers. \*


Ethernet based power management: \*

- Up to 1000 units on one busbar. \*


**NOTE** \* Contact DEIF for availability.

The complete system is easily monitored and controlled from PICUS through a graphical supervision page. The values that are presented in the intuitive and easy-to-use user interface include the running status, hours in operation, breaker status, condition of mains and busbars, and fuel consumption.

#### Example application with Load sharing

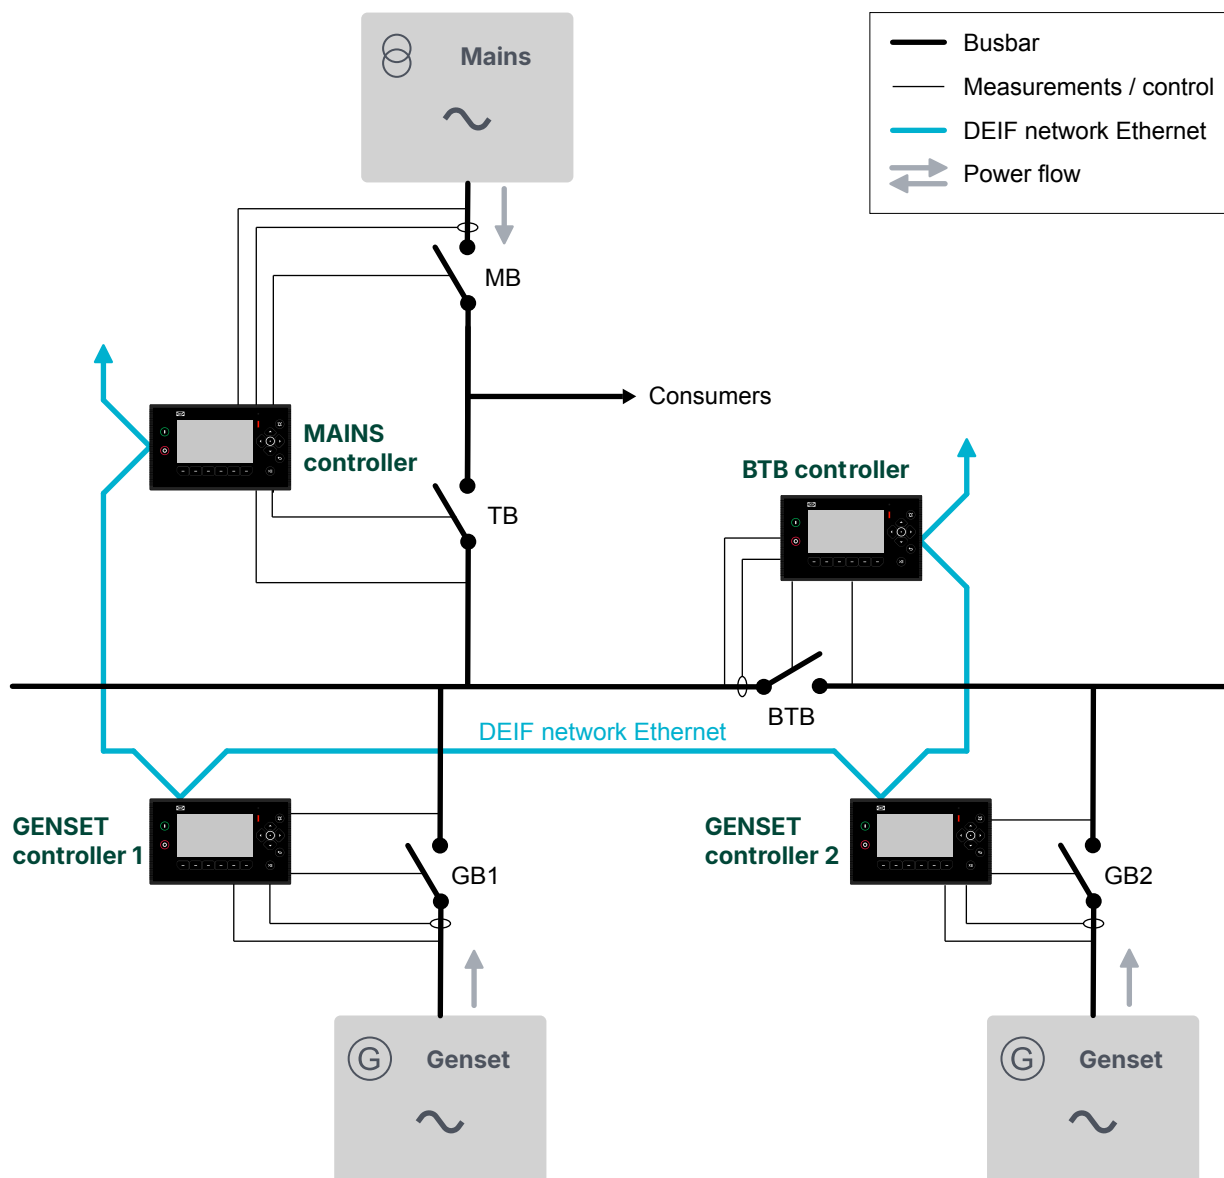

## Example application with Power management

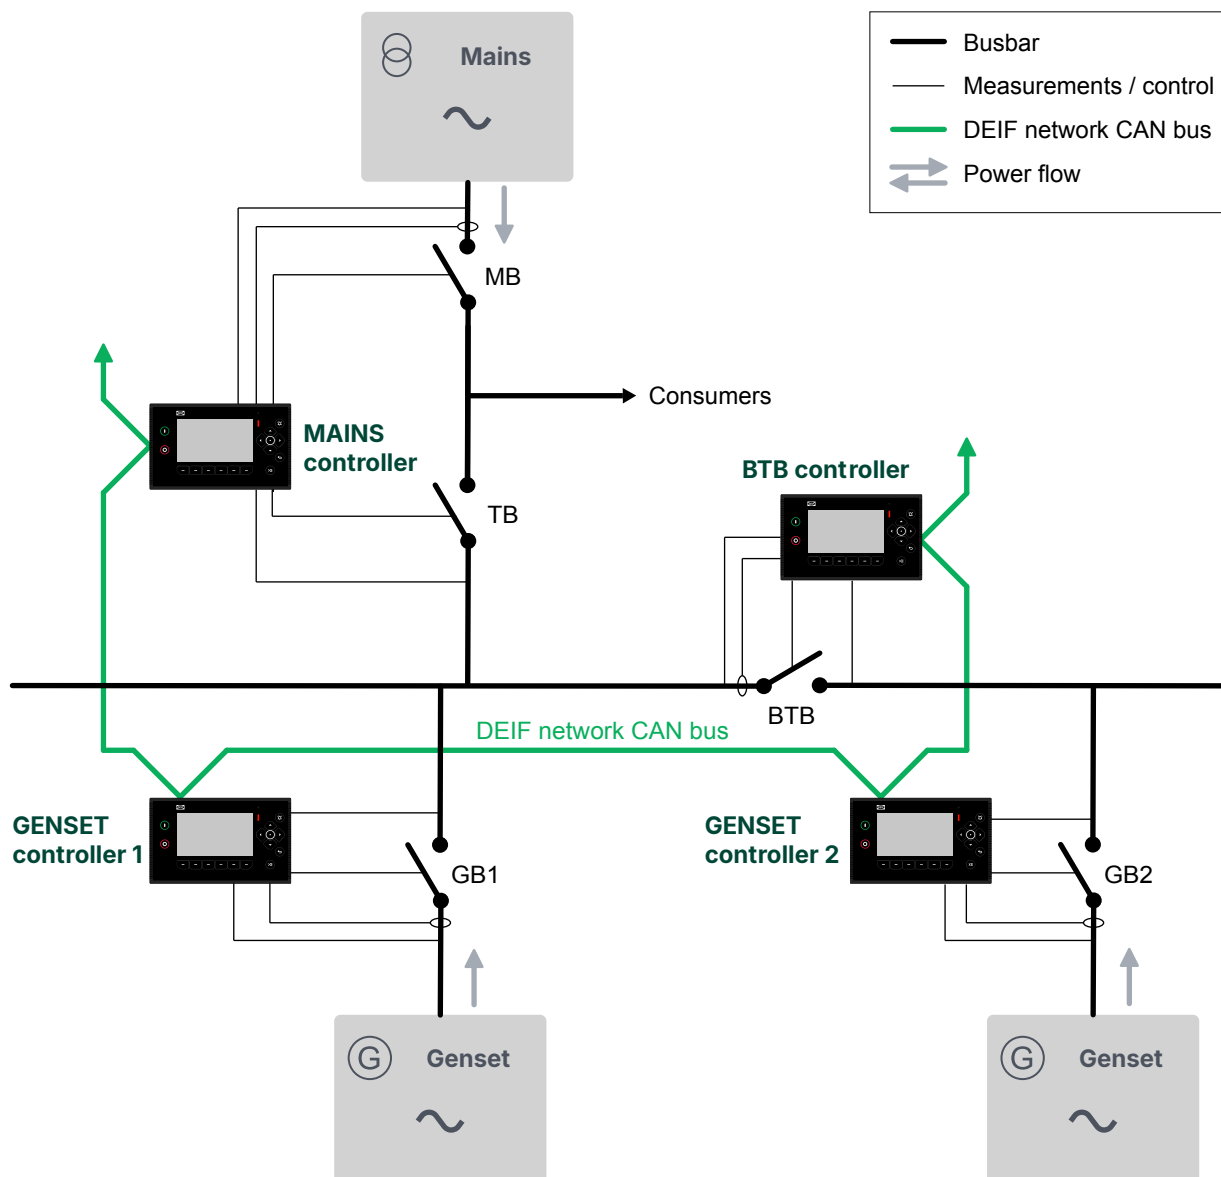

### 1.4.2 Extension rack functions

	Functions
General	<ul style="list-style-type: none"> <li>Extends I/O interface <ul style="list-style-type: none"> <li>6 additional hardware modules in Rack7.1</li> <li>3 additional hardware modules in Rack4.1</li> </ul> </li> </ul>

## 1.5 Compatible products

### 1.5.1 Power management

You can use iE 250 controllers together in a power management system:

- **AGC 150 Generator** (see [www.deif.com/products/agc-150-generator](http://www.deif.com/products/agc-150-generator))
- **AGC 150 Mains** (see [www.deif.com/products/agc-150-mains](http://www.deif.com/products/agc-150-mains))
- **AGC 150 BTB** (see [www.deif.com/products/agc-150-btb](http://www.deif.com/products/agc-150-btb))
- **AGC-4 Mk II Genset, Mains, BTB, Group, and Plant** (see [www.deif.com/products/agc-4-mk-ii](http://www.deif.com/products/agc-4-mk-ii))
- **AGC-4 Genset, Mains, BTB, Group, and Plant** (see [www.deif.com/products/agc-4](http://www.deif.com/products/agc-4))

- **ASC 150 Storage** (see [www.deif.com/products/asc-150-storage](http://www.deif.com/products/asc-150-storage)) \*
- **ASC 150 Solar** (see [www.deif.com/products/asc-150-solar/](http://www.deif.com/products/asc-150-solar/)) \*
- **ASC-4 Solar** (see [www.deif.com/products/asc-4-solar](http://www.deif.com/products/asc-4-solar)) \*
- **ASC-4 Battery** (see [www.deif.com/products/asc-4-battery](http://www.deif.com/products/asc-4-battery)) \*

**NOTE**    \* Contact DEIF for availability.

### 1.5.2    DEIF digital voltage controllers (DVC)

**DVC 350** is a digital AVR designed for alternators with SHUNT, AREP or PMG excitation. The DVC 350 monitors and regulates the alternator output voltage. iE 250 can control the DVC 350 features and receive fault information directly with the CAN bus communication.



**More information**

See [www.deif.com/products/dvc-350](http://www.deif.com/products/dvc-350)

**DVC 550** is an advanced digital AVR designed for alternators with SHUNT, AREP or PMG excitation. The DVC 550 monitors and regulates the alternator output voltage. iE 250 can control all the DVC 550 features and receive fault information directly with the CAN bus communication.



**More information**

See [www.deif.com/products/dvc-550](http://www.deif.com/products/dvc-550)

### 1.5.3    Additional inputs and outputs

#### ML 300 extension modules

You can use the Multi-line 300 (ML 300) extensions racks and range of modules.




**More information**

See [www.deif.com/products/multi-line-300-modules/](http://www.deif.com/products/multi-line-300-modules/) for information about all the racks and modules.

#### Extension racks



**Extension rack R4.1**  
1 PSM3.2  
3 module selection



**Extension rack R7.1**  
1 PSM3.2  
6 module selection

#### Modules



**IOM3.1 - Input/output module**  
4 changeover relay outputs  
10 digital inputs



**IOM3.2 - Input/output module**  
4 relay outputs  
4 analogue multifunctional outputs (including 2 pulse width modulation PWM outputs)  
4 digital inputs  
4 analogue multifunctional inputs



**IOM3.3 - Input/output module**  
10 analogue multifunctional inputs



**IOM3.4 - Input/output module**  
12 digital outputs  
16 digital inputs

## iE 650 modules


You can use CODESYS to use modules from iE 650.




### More information

See the **iE 650 PLC Data sheet** for details of these modules.

**Rack6-4** (4 slots)




**Rack6-14** (14 slots)

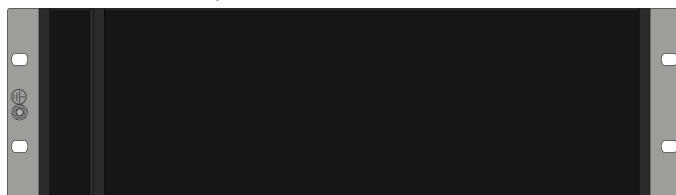

Racks with 6, 8, 10, and 12 slots are also available.

## Modules



### DIO6-2 - Input/output module

16 digital inputs  
16 digital outputs



### DIM6-1 - Input module

32 digital inputs



### DOM6-1 - Output module

32 digital outputs



### AIO6-2 - Input/output module

8 analogue outputs  
8 analogue inputs



### AOM6-2 - Output module

8 analogue inputs



### AIM6-1 - Input module

16 analogue outputs  
(Use AIM6-2 if only 8 analogue outputs are required)

## 1.5.4 Remote monitoring service: Insight

**Insight** is a responsive remote monitoring service. It includes real-time genset data, a customisable dashboard, GPS tracking, equipment and user management, email and/or SMS alerts, and cloud data management.



### More information

See [www.deif.com/products/insight](http://www.deif.com/products/insight)

## 1.5.5 Other equipment

DEIF has a wide variety of other equipment that is compatible. This includes synchroscopes, meters, transducers, current transformers, power supplies, and battery chargers.




### More information

See [www.deif.com](http://www.deif.com)

## 2. Technical specifications

### 2.1 Dimensions


#### 2.1.1 Front mounted controller with MIO2.1

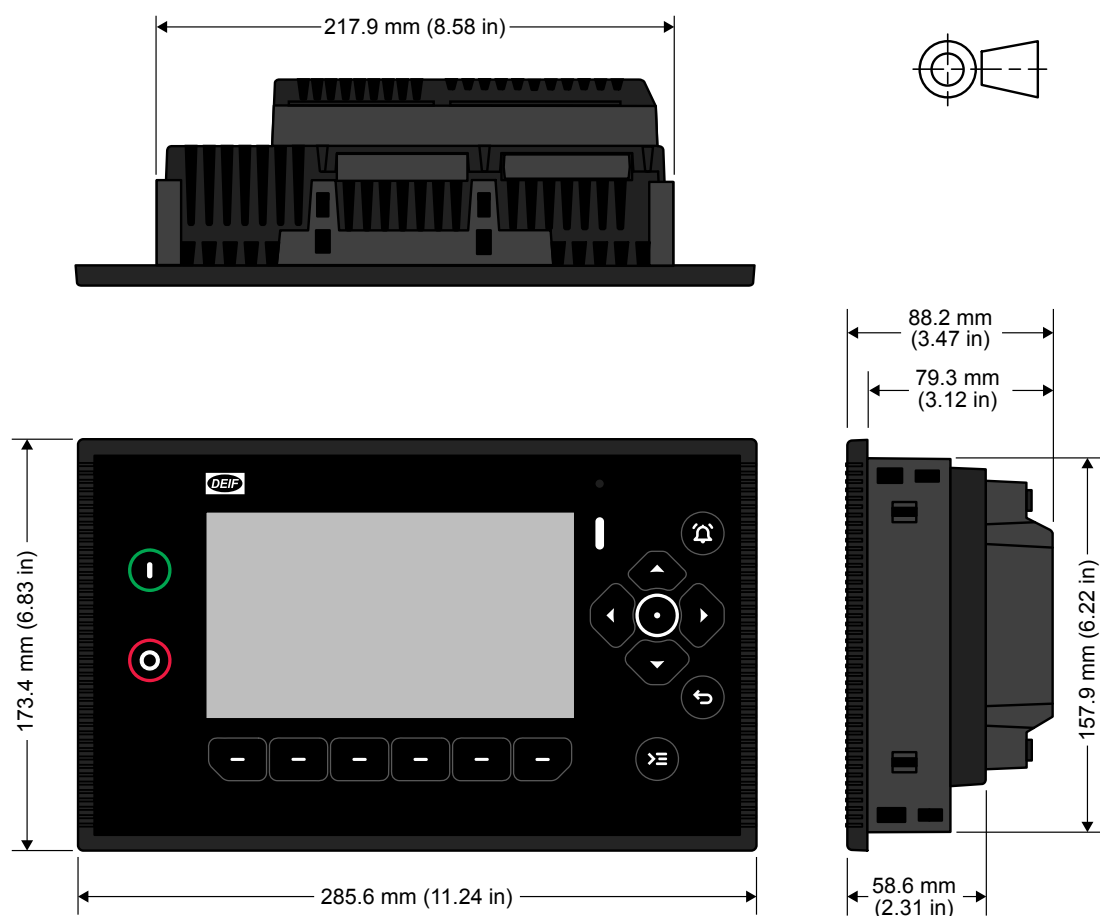

Category	Specifications
Dimensions	<b>With MIO:</b> L×H×D: 285.6 × 173.4 × 88.2 mm (11.24 × 6.83 × 3.47 in) (outer frame)
	<b>Without MIO:</b> L×H×D: 285.6 × 173.4 × 58.6 mm (11.24 × 6.83 × 2.30 in) (outer frame)
Panel cutout	L×H: 220 × 160 mm (8.67 × 6.30 in) Tolerance: ± 0.3 mm (0.01 in)
Weight	<b>With MIO:</b> ~ 1233 g (2.72 lb)

2.1.2 Base mounted controller with MIO2.1


Base mount version is shown mounted on DIN rail. It can alternatively be mounted using the mounting holes with fixing screws or bolts.

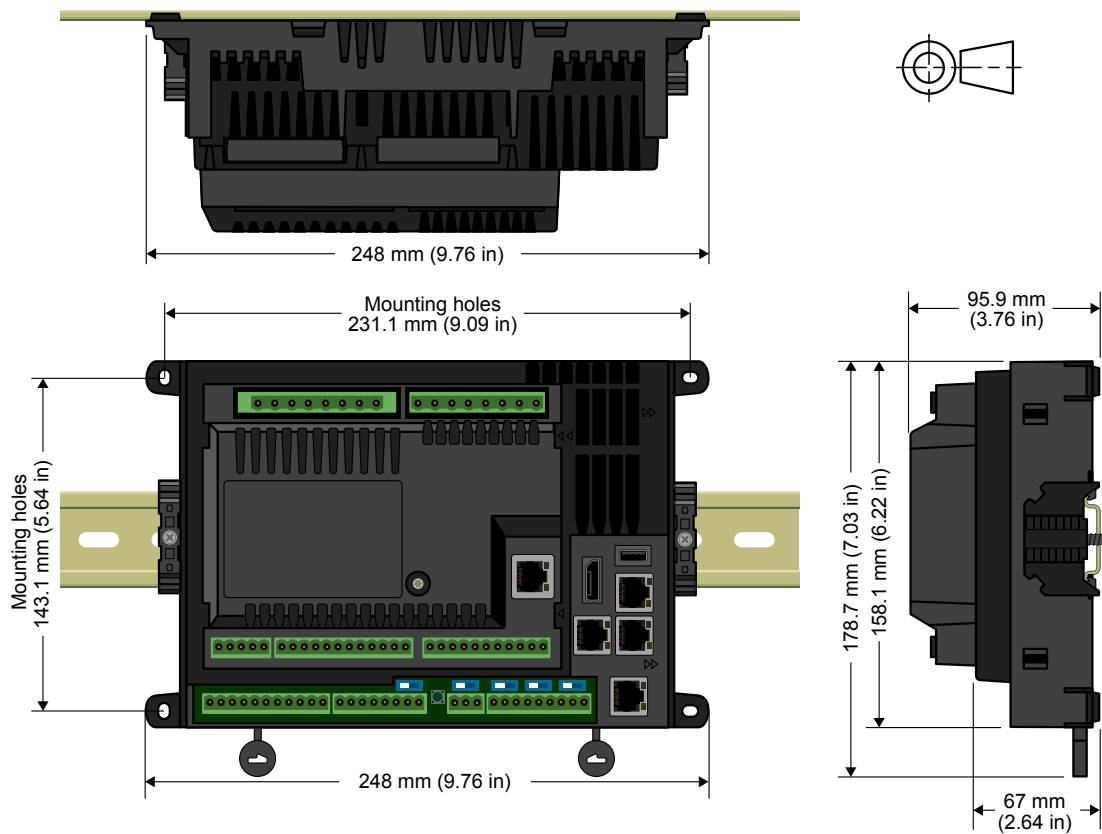

Category	Specifications
Dimensions	<b>With MIO:</b> L×H×D: 248 × 178.7 × 95.9 mm (9.76 × 7.03 × 3.76 in) (outer frame)
	<b>Without MIO:</b> L×H×D: 248 × 178.7 × 67 mm (9.76 × 7.03 × 2.64 in) (outer frame)
Mounting holes	L×H: 231.1 × 143.1 mm (9.09 × 5.64 in)
Weight	<b>With MIO:</b> ~ 942 g (2.07 lb)




2.1.3 iE 7 Local display

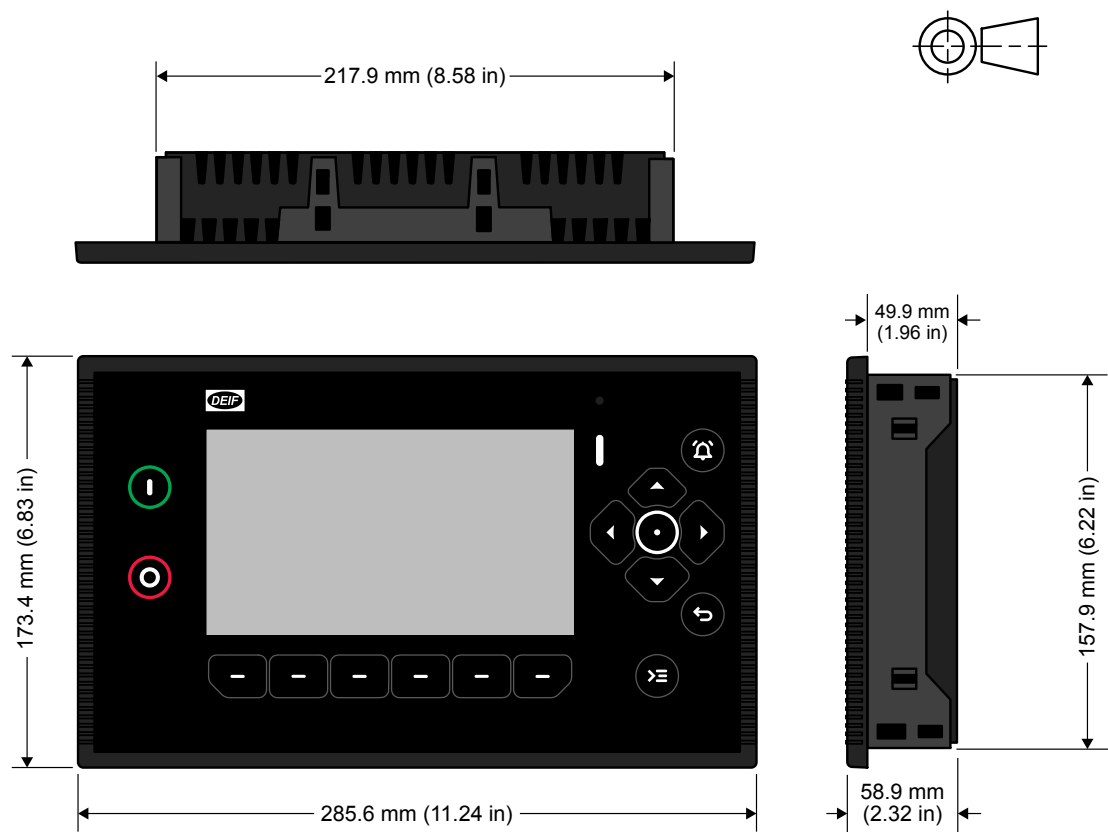


Category	Specifications
Dimensions	L×H×D: 285.6 × 173.4 × 58.9 mm (11.24 × 6.83 × 2.32 in) (outer frame)
Panel cutout	L×H: 220 × 160 mm (8.67 × 6.30 in)
Weight	840 g (1.9 lb)

2.1.4 Plug-in module for 8 Digital bi-directional channels

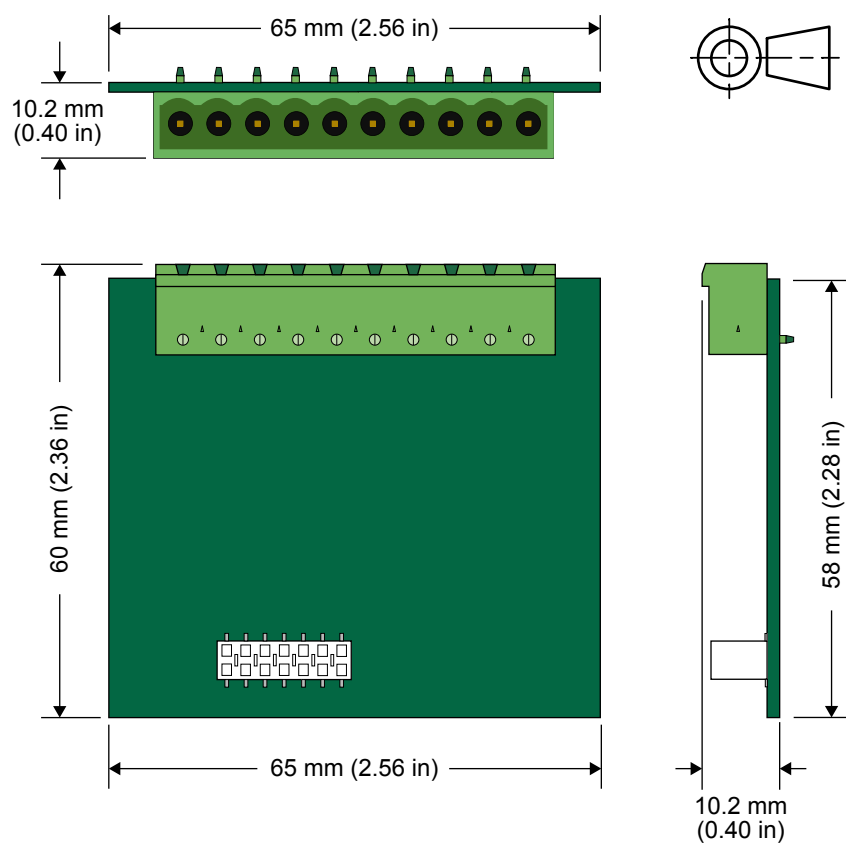

Category	Specifications
Dimensions	L×H×D: 65 × 60 × 10.2 mm (2.56 × 2.36 × 0.40 in) (outer frame)
Weight	24 g (0.05 lb)

2.1.5 Plug-in module for 4 Analogue bi-directional channels

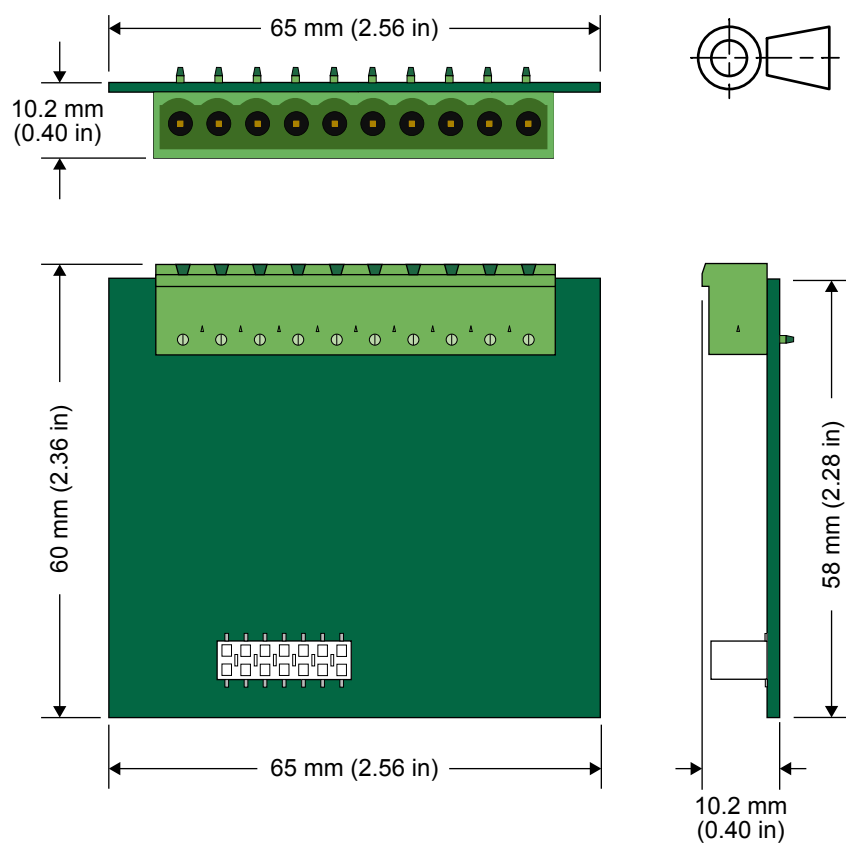

Category	Specifications
Dimensions	L×H×D: 65 × 60 × 10.2 mm (2.56 × 2.36 × 0.40 in) (outer frame)
Weight	24 g (0.05 lb)

## 2.2 Mechanical specifications

### 2.2.1 Front mounted controller with MIO2.1

Mechanical specifications	
<b>Vibration</b>	<p>Response:</p> <ul style="list-style-type: none"> <li>10 to 58.1 Hz, 0.15 mmpp</li> <li>58.1 to 150 Hz, 1 g. To IEC 60255-21-1 (Class 2)</li> </ul> <p>Endurance:</p> <ul style="list-style-type: none"> <li>10 to 150 Hz, 2 g. To IEC 60255-21-1 (Class 2)</li> </ul> <p>Seismic vibration:</p> <ul style="list-style-type: none"> <li>3 to 8.15 Hz, 15 mmpp</li> <li>8.15 to 35 Hz, 2 g. To IEC 60255-21-3 (Class 2)</li> </ul>
<b>Shock</b>	<p>10 g, 11 ms, half sine. To IEC 60255-21-2 Response (Class 2)</p> <p>30 g, 11 ms, half sine. To IEC 60255-21-2 Withstand (Class 2)</p> <p>50 g, 11 ms, half sine. To IEC 60068-2-27, test Ea</p> <p>Tested with three impacts in each direction in three axes (total of 18 impacts per test)</p>
<b>Bump</b>	<p>20 g, 16 ms, half sine IEC 60255-21-2 (Class 2)</p> <p>Tested with 1000 impacts in each direction on three axes (total of 6000 impacts per test)</p>
<b>Controller galvanic separation</b>	<p>Supply and DIO 1 to 8: 550 V, 50 Hz, 1 minute</p> <p>AIO 1 to 4: 550 V, 50 Hz, 1 minute</p> <p>COM 1 (RS-485): 550 V, 50 Hz, 1 minute</p> <p>COM 2 (RS-485): 550 V, 50 Hz, 1 minute</p> <p>CAN A: 550 V, 50 Hz, 1 minute</p> <p>CAN B: 550 V, 50 Hz, 1 minute</p> <p>CAN C: 550 V, 50 Hz, 1 minute</p> <p>Ethernet port 1: 550 V, 50 Hz, 1 minute</p> <p>Ethernet port 2: 550 V, 50 Hz, 1 minute</p> <p>Ethernet port 3: 550 V, 50 Hz, 1 minute</p> <p>Ethernet ETH0 / Ethernet 0 : 550 V, 50 Hz, 1 minute</p>
<b>Controller ports without galvanic separation</b>	Display port, USB port
<b>MIO2.1 galvanic separation</b>	<p>GOV: 550 V, 50 Hz, 1 minute</p> <p>AVR: 3000 V, 50 Hz, 1 minute</p> <p>AC current via internal transformers (I4, I1, I2, I3): 2210 V, 50 Hz, 1 minute</p> <p>AC voltage A-side (N, L1, L2, L3): 3310 V, 50 Hz, 1 minute</p> <p>AC voltage B-side (N, L1, L2, L3): 3310 V, 50 Hz, 1 minute</p> <p>EtherCAT port: 550 V, 50 Hz, 1 minute</p>
<b>MIO2.1 terminals without galvanic separation</b>	D+ and DIO 9 to 16, DI 1 to 8 and tacho
<b>Safety</b>	<p>Installation CAT. III 600 V</p> <p>Pollution degree 2</p> <p>IEC 60255-27</p>
<b>Flammability</b>	All plastic parts are self-extinguishing to UL94-V0
<b>EMC</b>	IEC 60255-26

**NOTE** g = gravitational force (g-force).

## 2.2.2 Base mounted controller with MIO2.1

Mechanical specifications	
<b>Vibration</b>	<p>Response:</p> <ul style="list-style-type: none"> <li>10 to 58.1 Hz, 0.15 mmpp</li> <li>58.1 to 150 Hz, 1 g. To IEC 60255-21-1 (Class 2)</li> </ul> <p>Endurance:</p> <ul style="list-style-type: none"> <li>10 to 150 Hz, 2 g. To IEC 60255-21-1 (Class 2)</li> </ul> <p>Seismic vibration:</p> <ul style="list-style-type: none"> <li>3 to 8.15 Hz, 15 mmpp</li> <li>8.15 to 35 Hz, 2 g. To IEC 60255-21-3 (Class 2)</li> </ul>
<b>Shock</b>	<p>10 g, 11 ms, half sine. To IEC 60255-21-2 Response (Class 2) *</p> <p>30 g, 11 ms, half sine. To IEC 60255-21-2 Withstand (Class 2)</p> <p>50 g, 11 ms, half sine. To IEC 60068-2-27, test Ea</p> <p>Tested with three impacts in each direction in three axes (total of 18 impacts per test)</p>
<b>Bump</b>	<p>20 g, 16 ms, half sine IEC 60255-21-2 (Class 2) *</p> <p>Tested with 1000 impacts in each direction on three axes (total of 6000 impacts per test)</p>
<b>Controller galvanic separation</b>	<p>Supply and DIO 1 to 8: 550 V, 50 Hz, 1 minute</p> <p>AIO 1 to 4: 550 V, 50 Hz, 1 minute</p> <p>COM 1 (RS-485): 550 V, 50 Hz, 1 minute</p> <p>COM 2 (RS-485): 550 V, 50 Hz, 1 minute</p> <p>CAN A: 550 V, 50 Hz, 1 minute</p> <p>CAN B: 550 V, 50 Hz, 1 minute</p> <p>CAN C: 550 V, 50 Hz, 1 minute</p> <p>Ethernet port 1: 550 V, 50 Hz, 1 minute</p> <p>Ethernet port 2: 550 V, 50 Hz, 1 minute</p> <p>Ethernet port 3: 550 V, 50 Hz, 1 minute</p> <p>Ethernet ETH0 / Ethernet 0 : 550 V, 50 Hz, 1 minute</p>
<b>Controller ports without galvanic separation</b>	<p>Display port, USB port</p>
<b>MIO2.1 galvanic separation</b>	<p>GOV: 550 V, 50 Hz, 1 minute</p> <p>AVR: 3000 V, 50 Hz, 1 minute</p> <p>AC current via internal transformers (I4, I1, I2, I3): 2210 V, 50 Hz, 1 minute</p> <p>AC voltage A-side (N, L1, L2, L3): 3310 V, 50 Hz, 1 minute</p> <p>AC voltage B-side (N, L1, L2, L3): 3310 V, 50 Hz, 1 minute</p> <p>EtherCAT port: 550 V, 50 Hz, 1 minute</p>
<b>MIO2.1 terminals without galvanic separation</b>	<p>D+ and DIO 9 to 16, DI 1 to 8 and tacho</p>
<b>Safety</b>	<p>Installation CAT. III 600 V</p> <p>Pollution degree 2</p> <p>IEC 60255-27</p>
<b>Flammability</b>	<p>All plastic parts are self-extinguishing to UL94-V0</p>
<b>EMC</b>	<p>IEC 60255-26</p>

**NOTE** \* With DIN rail clamp end-stop mounted tight to the unit. See [DIN rail clamp](#) for the type of DIN clamp required.  
g = gravitational force (g-force).

### 2.2.3 iE 7 Local display

Mechanical specifications	
<b>Vibration</b>	<p>Response:</p> <ul style="list-style-type: none"> <li>10 to 58.1 Hz, 0.15 mmpp</li> <li>58.1 to 150 Hz, 1 <i>g</i>. To IEC 60255-21-1 (Class 2)</li> </ul> <p>Endurance:</p> <ul style="list-style-type: none"> <li>10 to 150 Hz, 2 <i>g</i>. To IEC 60255-21-1 (Class 2)</li> </ul> <p>Seismic vibration:</p> <ul style="list-style-type: none"> <li>3 to 8.15 Hz, 15 mmpp</li> <li>8.15 to 35 Hz, 2 <i>g</i>. To IEC 60255-21-3 (Class 2)</li> </ul>
<b>Shock</b>	<p>10 <i>g</i>, 11 ms, half sine. To IEC 60255-21-2 Response (Class 2)</p> <p>30 <i>g</i>, 11 ms, half sine. To IEC 60255-21-2 Withstand (Class 2)</p> <p>50 <i>g</i>, 11 ms, half sine. To IEC 60068-2-27, test Ea</p> <p>Tested with three impacts in each direction in three axes (total of 18 impacts per test)</p>
<b>Bump</b>	<p>20 <i>g</i>, 16 ms, half sine IEC 60255-21-2 (Class 2)</p> <p>Tested with 1000 impacts in each direction on three axes (total of 6000 impacts per test)</p>
<b>Controller ports without galvanic separation</b>	DisplayPort, USB ports
<b>Safety</b>	<p>Installation CAT. III 600 V</p> <p>Pollution degree 2</p> <p>IEC 60255-27</p>
<b>Flammability</b>	All plastic parts are self-extinguishing to UL94-V0
<b>EMC</b>	IEC 60255-26

**NOTE** *g* = gravitational force (g-force).

## 2.3 Environmental specifications

### 2.3.1 Front mounted controller with MIO2.1

Environmental specifications	
Operating temperature	-30 to 70 °C (-22 to 158 °F)
Storage temperature	-30 to 80 °C (-22 to 176 °F)
Change of temperature	70 to -30 °C, 1 °C / minute, 5 cycles. To IEC 60255-1
Operating altitude	0 to 4000 m above sea level 2001 to 4000 m: Maximum 480 V AC
Operating humidity	Damp heat cyclic, Condensing. <ul style="list-style-type: none"><li>Low temperature: 25°C / 97% Relative humidity (RH), high temperature: 55°C / 93% Relative humidity (RH), for 144 hours.</li><li>To EN IEC 60255-1.</li></ul> Damp heat steady state, Non-Condensing. <ul style="list-style-type: none"><li>40°C / 93% Relative humidity (RH), for 240 hours.</li><li>To EN IEC 60255-1.</li></ul>
Protection degree	EN IEC 60529 <ul style="list-style-type: none"><li>IP65 (front of module when installed into the control panel with the supplied sealing gasket)</li><li>IP20 on terminal side</li></ul>

### 2.3.2 Base mounted controller with MIO2.1

Environmental specifications	
Operating temperature	-30 to 70 °C (-22 to 158 °F)
Storage temperature	-30 to 80 °C (-22 to 176 °F)
Change of temperature	70 to -30 °C, 1 °C / minute, 5 cycles. To IEC 60255-1
Operating altitude	0 to 4000 m above sea level 2001 to 4000 m: Maximum 480 V AC
Operating humidity	Damp heat cyclic, Condensing. Low temperature: 25°C / 97%RH, high temperature: 55°C / 93%RH, for 144 hours. To EN /IEC 60255-1. Damp heat steady state, Non-Condensing. 40°C / 93%RH, for 240 hours. To EN /IEC 60255-1.
Protection degree	EN IEC 60529 <ul style="list-style-type: none"><li>IP20 on terminal side</li></ul>

### 2.3.3 iE 7 Local display

Environmental specifications	
Operating temperature	-30 to 70 °C (-22 to 158 °F)
Storage temperature	-30 to 80 °C (-22 to 176 °F)
Change of temperature	70 to -30 °C, 1 °C / minute, 5 cycles. To IEC 60255-1
Operating altitude	0 to 4000 m above sea level 2001 to 4000 m: Maximum 480 V AC
Operating humidity	Damp heat cyclic, 20/55 °C at 97 % relative humidity, 144 hours. To IEC 60255-1




## Environmental specifications

	Damp heat steady state, 40 °C at 93 % relative humidity, 240 hours. To IEC 60255-1
<b>Protection degree</b>	<p>EN IEC 60529</p> <ul style="list-style-type: none"><li>• IP65 (front of module when installed into the control panel with the supplied sealing gasket)</li><li>• IP20 on terminal side</li></ul>

2.4 Controller

2.4.1 Terminal connections

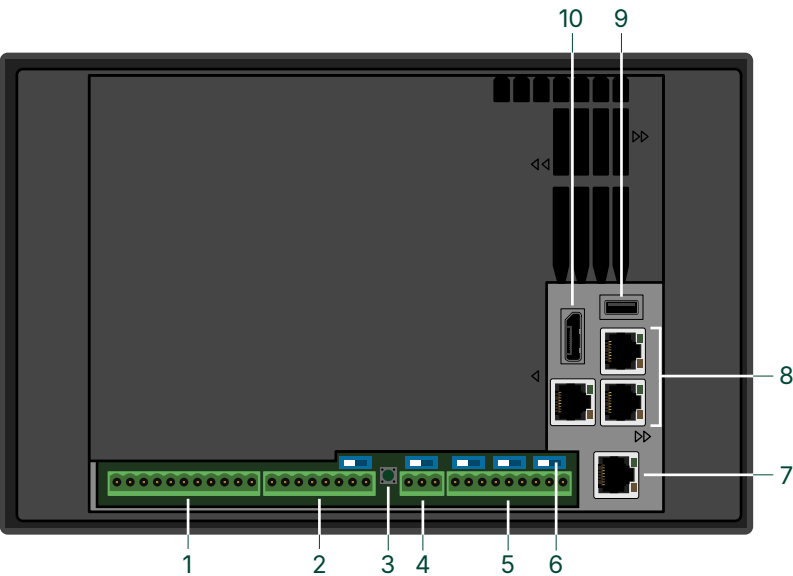

No.	Function	Notes
1	Power supply Digital bi-directional channels *	1 Power supply (DC+/-) 8 Bi-directional digital channels * DC(+) for DIO 4 to 8
2	COM 1 ** Analogue bi-directional channels	1 RS-485 ** 4 Bi-directional analogue channels
3	Push-button	
4	COM 2 **	1 RS-485 **
5	CAN	3 CAN connections
6	Built-in end resistors	5 switches to enable the end resistors 120 Ω (Ohm) for CAN or Serial termination
7	ETH0 / Ethernet 0	1 Ethernet connection bridged to switch
8	Ethernet	3 Ethernet switch connections
9	USB	USB host (type A)
10	DisplayPort	For use with the base-mounted version. External third-party non-DEIF displays should be configured to Input mode instead of Automatic detection.

**NOTE**    \* Breaker functions must be assigned to MIO channels.  
             \*\* Future use. Can be used with CODESYS if license is installed.

2.4.2 Electrical specifications

Power supply	
Input voltage	Nominal voltage: 12 V DC or 24 V DC (Operation range: 6.5 to 36 V DC) Power up at 8 V Operation down to 6.5 V at 15 W Operation down to 6.9 V at 28 W
Start current	Power supply current limiter

Power supply	
	<ul style="list-style-type: none"> <li>24 V: 4 A minimum</li> <li>12 V: 8 A minimum</li> </ul> Battery: No limit
Voltage withstand	Reverse polarity
Power supply drop-out immunity	0 V DC for 50 ms (coming from more than 6.5 V DC) at 15 W
Power supply load dump protection	Load dump protected according to ISO16750-2 test A
Power consumption	15 W typical 28 W maximum

Battery voltage measurement	
Accuracy	$\pm 0.8$ V within 8 to 32 V DC, $\pm 0.5$ V within 8 to 32 V DC @ 20 °C

Analogue bi-directional channels	
4 individual channels (isolated group) with configurable function. Configurable as input or output channels. Galvanic separation to CPU All channels in one electric group	
Input channels	
Digital input	0 to 24 V DC with common threshold 4 V
Resistor measurement	Range: 0 to 1 M $\Omega$ <b>Accuracy</b> 0 to 80 $\Omega$ : $\pm 1$ % $\pm 0.5$ $\Omega$ 80 $\Omega$ to 10 k $\Omega$ : $\pm 0.4$ % 10 to 20 k $\Omega$ : $\pm 0.5$ % 20 to 200 k $\Omega$ : $\pm 1.5$ % 200 to 1000 k $\Omega$ : $\pm 12$ %
Voltage input	0 to 10 V DC (16-bit sigma delta) Accuracy: 0.5 % of full scale over the operating temperature range. Input impedance: 200 k $\Omega$ .
Current input	0 to 20 mA (16-bit sigma delta) Accuracy: 0.6 % of full scale over the operating temperature range.
Output channels	
Voltage output	0 to 10 V DC (13-bit resolution) Accuracy: 0.5 % of full scale over the operating temperature range.
Current output	0 to 20 mA (13-bit resolution) Accuracy: 0.6 % of full scale over the operating temperature range. Maximum 2 channels can be selected as current output (internal power limitation)

Digital bi-directional channels	
8 individual channels (one galvanic isolated group) with configurable function. Configurable as input or output channels. <b>Modes:</b> <ul style="list-style-type: none"> <li>Disabled</li> <li>Digital input (sourcing) (negative switching)</li> <li>Digital output (sourcing)</li> </ul>	
Digital input channels	0 to 24 V DC

Digital bi-directional channels	
	Current source (contact cleaning): Initial 10 mA, continuous 2 mA
Digital output channels	Output voltage: 12 to 24 V DC Digital output switch output voltage is dependant on DC+ <ul style="list-style-type: none"> <li>DIO channels 1 to 4 use terminal 1.</li> <li>DIO channels 5 to 8 use terminal 7.</li> </ul> 2 A DC inrush and 0.5 A continuous (maximum 2 A for continuous for all channels)

Real-Time Clock (RTC) battery	
Battery type	CR2430 3V battery, rated for operation at -40 to 85°C (-40 to 185 °F). This is <b>not</b> a standard CR2430 battery.


### 2.4.3 Communication specifications

Communication specifications	
CAN A CAN B CAN C	Engine, DVC, or power management Data connection 2-wire and common (isolated) Switch 120 Ω (ohm) termination resistors
COM 1 (RS-485) *	Data connection 2-wire and common (isolated) Switch 120 Ω (ohm) termination resistors
COM 2 (RS-485) *	Data connection 2-wire and common (isolated) Switch 120 Ω (ohm) termination resistors
USB	USB host (type A)
3 Ethernet (SWP1, SWP2, SWP3)	Switch for Ethernet connections RJ45 Use an Ethernet cable that meets or exceeds the SF/UTP CAT5e specifications
ETH0 / Ethernet 0	Ethernet bridged to the switch RJ45 Use an Ethernet cable that meets or exceeds the SF/UTP CAT5e specifications
DisplayPort	For base-mounted versions only Connection to a local display

**NOTE** \* For future use. Can be used with CODESYS if license is installed.

2.5 iE 7 Local display

2.5.1 Terminal connections

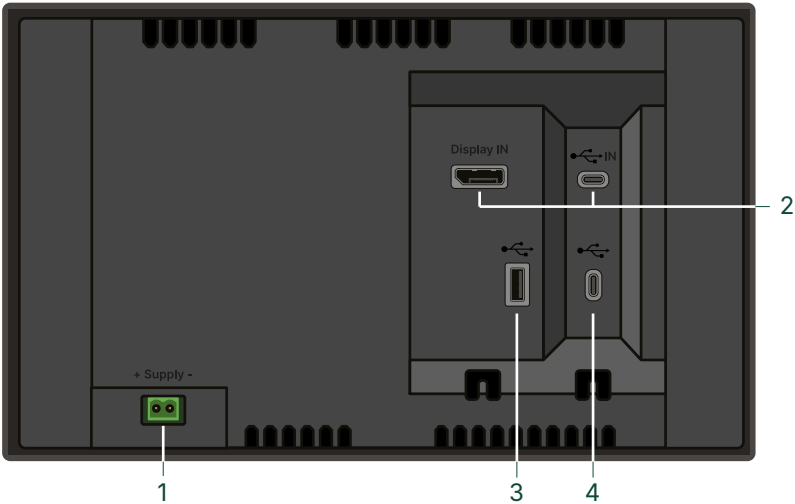

No.	Function	Notes
1	Power supply	1 Power supply (DC+/-)
2	DisplayPort USB IN	Connection to base-mounted controller. USB 2.0 host (type C)
3	USB	USB 2.0 host (type A)
4	USB	USB 2.0 host (type C)

2.5.2 Electrical specifications

Power supply	
Input voltage	Nominal voltage: 12 V DC or 24 V DC (Operation range: 6.5 to 36 V DC) Power up at 8 V Operation down to 6.5 V at 15 W Operation down to 6.9 V at 28 W
Voltage withstand	Reverse polarity
Power supply drop-out immunity	0 V DC for 50 ms (coming from more than 6.5 V DC) at 15 W
Power supply load dump protection	Load dump protected according to ISO16750-2 test A
Power consumption	15 W typical 28 W maximum

Battery voltage measurement	
Accuracy	±0.8 V within 8 to 32 V DC, ±0.5 V within 8 to 32 V DC @ 20 °C

2.5.3 Communication specifications

Communication specifications	
DisplayPort *	Connection to base-mounted controller.
USB IN *	Connection to base-mounted controller. USB 2.0 (type C).

Communication specifications	
USB hub Type A	For future use.
USB hub Type C	For future use.

**NOTE** \* Both DisplayPort and USB IN are required for communication and control to the controller.

## 2.6 Measurement Input Output module (MIO2.1)

### 2.6.1 About

The Measurement Input and Output module (MIO2.1) is an add-on module for the iE 250. It features 8 bi-directional digital terminals, allowing smart flexibility where you can use them for what you need.

#### AC measurements


The module measures the voltage and current on one side of a breaker, and the voltage on the other side. The hardware module responds when the measurements exceed the AC alarm parameters.

The module provides robust frequency detection in environments with electrical noise. It allows extended measurement bandwidth up to 40 times the nominal frequency. It includes a configurable 4th current measurement.

#### Additional features

- Analogue outputs for GOV and AVR.
- 8 Digital input channels.
- 8 Digital bi-directional channels.
- Analogue Tacho (MPU/N/NPN/PNP) input.

### 2.6.2 Terminal connections

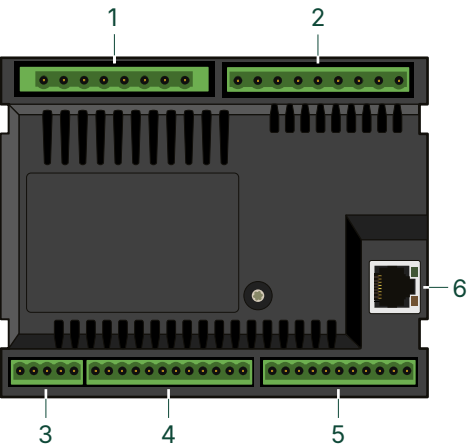

No.	Function	Notes
1	AC current	A-side: L1 (S1,S2) L2 (S1,S2) L3 (S1,S2) A-side or B-side: L4 (S1,S2)
2	AC voltage	A-side: N, L1, L2, L3 B-side: N, L1, L2, L3
3	Analogue outputs (GOV/AVR)	AVR (+/-) GOV (+/-)
4	D+ and Digital bi-directional channels	D+ E-stop power cut-off 8 Bi-directional configurable channels
5	Digital input channels and Tacho	8 Digital inputs



No.	Function	Notes
		Tacho
6	EtherCAT	Connection to <a href="#">extension racks</a>

### 2.6.3 Electrical specifications

All AC measurement specifications are within the reference conditions, unless otherwise stated.

Voltage measurements	
Nominal value (Un)	100 to 690 V AC
Reference range	30 to 931.5 V AC
Measurement range	5.0 to 931.5 V AC, Truncation: 2 V AC
Accuracy	5.0 to 931.5 V AC: $\pm 0.5\%$ or $\pm 0.5$ V AC (whichever is greater)
UL/cUL Listed	600 V AC phase-phase
Consumption	Maximum 0.25 VA/phase
Voltage withstand	Un + 35 % continuously Un + 45 % for 10 seconds

Current measurements	
Nominal value (IN)	1 or 5 A AC from current transformer
Measurement range	0.005 to 20.0 A AC, Truncation: 4 mA AC
Accuracy	0.005 to 20.0 A AC: $\pm 0.5\%$ or $\pm 5$ mA AC (whichever is greater)
UL/cUL Listed	From listed or R/C (XODW2.8) current transformers 1 or 5 A AC
Consumption	Maximum 0.3 VA/phase
Current withstand	10 A AC continuous 20 A AC for 1 minute 75 A AC for 10 seconds 250 A AC for 1 second

Frequency measurements	
Nominal value	50 Hz or 60 Hz
Reference range	45 to 66 Hz
Measurement range	10 to 75 Hz
System frequencies	Accuracy: 10 to 75 Hz $\pm 5$ mHz, within the temperature operating range.
Phase frequencies	Accuracy: 10 to 75 Hz $\pm 10$ mHz, within the temperature operating range.

Phase angle (voltage) measurement	
Measurement range	-179.9 to 180°
Accuracy	-179.9 to 180°: 0.2°, within the temperature operating range

Power measurement	
Accuracy	$\pm 0.5\%$ of measured value or $\pm 0.5\%$ of $U_n \cdot I_n$ , whichever is greater, within the current measurement range

## AC Measurement temperature and accuracy

<b>AC Measurement reference range</b>	-20 to 55 °C (-4 to 131 °F)
<b>Temperature-dependent accuracy outside the reference range</b>	<b>Voltage:</b> Additional: $\pm 0.05\%$ , or $\pm 0.05\text{ V AC}$ per 10 °C (18 °F) (whichever is greater) <b>Current:</b> Additional: $\pm 0.05\%$ , or $\pm 0.5\text{ mA AC}$ per 10 °C (18 °F) (whichever is greater) <b>Power:</b> Additional: $\pm 0.05\%$ , or $\pm 0.05\%$ of $U_n \cdot I_N$ per 10 °C (18 °F) (whichever is greater)

## Digital input channels

8 individual input channels with configurable function.

- Digital input (sourcing) (negative switching)

Current or negative source (contact cleaning): Initial 10 mA, continuous 2 mA.

## D+

<b>Excitation current</b>	210 mA, 12 V 105 mA, 24 V
<b>Charging fail threshold</b>	6 V
<b>E-stop power cut-off</b>	An e-stop on terminal 46 cuts the power to the D+ terminal.

## Tacho

<b>Voltage input range</b>	$\pm 1$ to 70 Vp
<b>W</b>	8 to 36 V
<b>Frequency input range</b>	10 to 10 kHz
<b>Frequency measurement tolerance</b>	1 % of reading
<b>Wire break detection</b>	Yes

## Digital bi-directional channels

8 bi-directional digital channels with configurable function.

All channels in one electric group.

Configurable as input or output channels.

### Modes:

- Disabled
- Digital input (sourcing) (negative switching)
- Digital output (sourcing)

<b>Digital input</b>	0 to 24 V DC Current source (contact cleaning): Initial 10 mA, continuous 2 mA
<b>Digital output</b>	<b>Supply voltage:</b> 12 to 24 V (operating range 6.5 to 28 V DC) <ul style="list-style-type: none"> <li>• DIO channels 9 to 12 supply on terminal 46 DC (+) (optional: E-stop power cut-off)</li> <li>• DIO channels 13 to 16 supply on terminal 52</li> </ul> <b>Output current:</b> 2 A DC inrush and 0.5 A continuous (maximum 2 A continuous for all channels)

## Analogue outputs for GOV or AVR

<b>Output types for GOV or AVR</b>	DC output or PWM
<b>Minimum load resistance</b>	500 $\Omega$ (Ohm) or 20 mA


Governor (GOV)	
DC voltage output range	-10.5 to 10.5 V DC
PWM output voltage	Default 6 V, configurable in platform level via EtherCAT in the range 1 to 10.5 V Application level fixed to platform configuration
PWM frequency range	1 to 2500 Hz $\pm 25$ Hz
PWM duty cycle resolution	12 bits (4096 steps)
Accuracy	Accuracy: $\pm 1$ % of setting

Automatic voltage regulator (AVR)	
DC voltage output range	-10.5 to 10.5 V DC
PWM output voltage	Default 6 V, configurable in platform level via EtherCAT in the range 1 to 10.5 V Application level fixed to platform configuration
PWM frequency range	1 to 2500 Hz $\pm 25$ Hz
PWM duty cycle resolution	12 bits (4096 steps)
Accuracy	Accuracy: $\pm 1$ % of setting

## 2.6.4 Communication specifications

EtherCAT	
EtherCAT communication	RJ45 Use an Ethernet cable that meets or exceeds the SF/UTP CAT5e specifications

2.7 Plug-in module for 8 Digital bi-directional channels

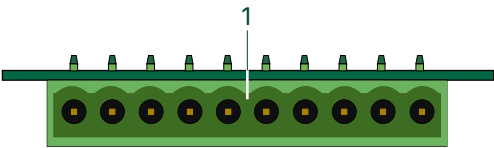


No.	Function	Notes
1	Digital bi-directional channels	COM+ 8 Bi-directional digital channels Ground

Electrical specifications

Digital bi-directional channels	
8 bi-directional digital channels with configurable function. All channels in one electric group. Configurable as input or output channels. <b>Modes:</b> <ul style="list-style-type: none"><li>Disabled</li><li>Digital input (sourcing) (negative switching)</li><li>Digital output (sourcing)</li></ul>	
Digital input	0 to 24 V DC Current source (contact cleaning): Initial 10 mA, continuous 2 mA
Digital output	Supply voltage: 12 to 24 V (operating range 6.5 to 28 V DC) Output current: Up to 0.5 A (maximum 1 A for all 4 channels) 2 A DC inrush and 0.5 A continuous (maximum 2 A for continuous for all channels)

## 2.8 Plug-in module for 4 Analogue bi-directional channels

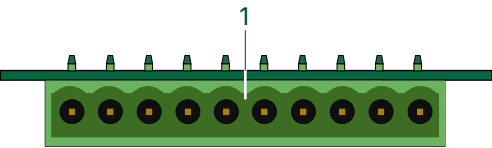

No.	Function	Notes
1	Analogue bi-directional channels	4 Analogue bi-directional channels Ground

### Electrical specifications

Analogue bi-directional channels	
4 individual channels (isolated group) with configurable function. Configurable as input or output channels. Galvanic separation to CPU All channels in one electric group	
Input channels	
Digital input	0 to 24 V DC with common threshold 4 V
Resistor measurement	Range: 0 to 1 MΩ <b>Accuracy</b> 0 to 80 Ω: ±1 % ±0.5 Ω 80 to 200 Ω: ±0.4 % 200 Ω to 10 kΩ: ±0.4 % 10 to 20 kΩ: ±0.5 % 20 to 200 kΩ: ±1.5 % 200 to 1000 kΩ: ±12 %
Voltage input	0 to 10 V DC (16-bit sigma delta) Accuracy: 0.5 % of full scale over the operating temperature range. Input impedance: 200 kΩ
Current input	0 to 20 mA (16-bit sigma delta) Accuracy: 0.6 % of full scale over the operating temperature range.
Output channels	
Voltage output	0 to 10 V DC (13-bit resolution) Accuracy: 0.5 % of full scale over the operating temperature range.
Current output	0 to 20 mA (13-bit resolution) Accuracy: 0.6 % of full scale over the operating temperature range. Maximum 2 channels can be selected as current output (internal power limitation)

## 2.9 Accessories

### 2.9.1 DIN rail clamps

These are supplied with the base mounted version.

Category	Specification
DIN rail	35
Type	E/NS 35 N BK - End bracket

### 2.9.2 USB type A to C cable

The USB cable is necessary for control between the display and base mounted controller.

This is supplied with the iE 7 Local display.

Category	Specification
Cable type	USB type A to type C cable.
USB	USB 2.0
Length	3.0 m (9.85 ft)

### 2.9.3 DisplayPort cable

The DisplayPort cable is necessary for visual HMI between the display and base mounted controller.

This is supplied with the iE 7 Local display.

Category	Specification
Cable type	VESA DisplayPort compliant cable.
Length	3.0 m (9.85 ft)

### 2.9.4 Ethernet cable

The Ethernet cable from DEIF meets the technical specifications below.

Category	Specification
Cable type	Shielded patch cable SF/UTP CAT5e
Temperature	Fixed installation: -40 to 80 °C (-40 to 176 °F) Flexible installation: -20 to 80 °C (-4 to 176 °F)
Minimum bending radius (recommended)	Fixed installation: 25 mm (1 in) Flexible installation: 50 mm (2 in)
Length	2 m (6.6 ft)
Weight	~110 g (4 oz)

## 2.10 Approvals

### Standards

CE

UKCA

UL/cUL Listed to - UL/ULC6200:2019 1.ed. Controllers for Use in Power Production



#### More information

See Approvals/certifications for the most recent certificates [www.deif.com/documentation/ie-250/](http://www.deif.com/documentation/ie-250/).

## 2.11 Cybersecurity

### Category

### Specification

**Cybersecurity**

Conforming to IEC 62443 \*

**NOTE** \* Connections to untrusted networks may require additional equipment or security counter-measures not included in the product.

## 3. Legal information

### 3.1 Disclaimer and copyright

#### Open source software

This product contains open source software licensed under, for example, the GNU General Public License (GNU GPL) and GNU Lesser General Public License (GNU LGPL). The source code for this software can be obtained by contacting DEIF at [support@deif.com](mailto:support@deif.com). DEIF reserves the right to charge for the cost of the service.

#### Trademarks

*DEIF* and the DEIF logo are trademarks of DEIF A/S.

*BELDEN* is a trademark of BELDEN INC.

*Bonjour*® is a registered trademark of Apple Inc. in the United States and other countries.

*Adobe*®, *Acrobat*®, and *Reader*® are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States and/or other countries.

*CANopen*® is a registered community trademark of CAN in Automation e.V. (CiA).

*SAE J1939*® is a registered trademark of SAE International®.

*CODESYS*® is a trademark of CODESYS GmbH.

*EtherCAT*®, *EtherCAT P*®, *Safety over EtherCAT*®, are trademarks or registered trademarks, licensed by Beckhoff Automation GmbH, Germany.

*VESA*® and *DisplayPort*® are registered trademarks of Video Electronics Standards Association (VESA®) in the United States and other countries.

*Modbus*® is a registered trademark of Schneider Automation Inc.

*Torx*®, *Torx Plus*® are trademarks or registered trademarks of Acument Intellectual Properties, LLC in the United States or other countries.

*Windows*® is a registered trademark of Microsoft Corporation in the United States and other countries.

All trademarks are the properties of their respective owners.

#### Copyright

© Copyright DEIF A/S. All rights reserved.

#### Disclaimer

DEIF A/S reserves the right to change any of the contents of this document without prior notice.

The English version of this document always contains the most recent and up-to-date information about the product. DEIF does not take responsibility for the accuracy of translations, and translations might not be updated at the same time as the English document. If there is a discrepancy, the English version prevails.