

Series 300

Hardware modules

Data sheet

4921240645-D



Improve
Tomorrow



1. Series 300

1.1 About the hardware modules.....	3
-------------------------------------	---

2. Technical specifications

2.1 Alternating current module ACM3.1.....	4
2.2 Differential current module ACM3.2.....	6
2.3 Engine interface module EIM3.1.....	8
2.4 Governor and AVR module GAM3.1.....	11
2.5 Governor and AVR module GAM3.2.....	13
2.6 Input/output module IOM3.1.....	16
2.7 Input/output module IOM3.2.....	18
2.8 Input/output module IOM3.3.....	21
2.9 Input/output module IOM3.4.....	23
2.10 Power supply module PSM3.1 (Controller).....	25
2.11 Power supply module PSM3.2 (Extension).....	27
2.12 Processor and communication module PCM3.3.....	28
2.13 Rack R4.1.....	32
2.14 Rack R7.1.....	33
2.15 Blind module.....	34
2.16 Small blind module.....	34

3. Legal information

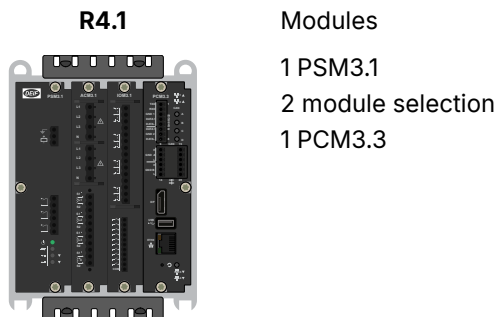
3.1 Disclaimer and copyright.....	35
-----------------------------------	----

1. Series 300

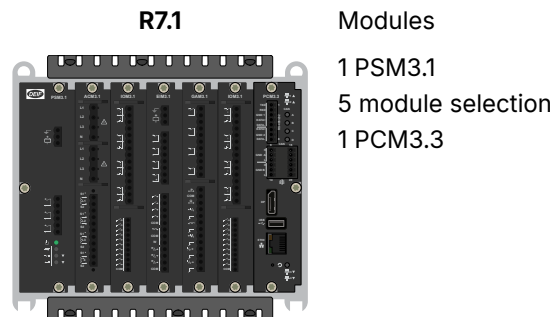
1.1 About the hardware modules

The hardware modules are printed circuit boards that slot in to either a R7.1 or R4.1 rack. Depending on the type of module, they can provide AC or other measurements, inputs, outputs and give communication indication.

Controller racks

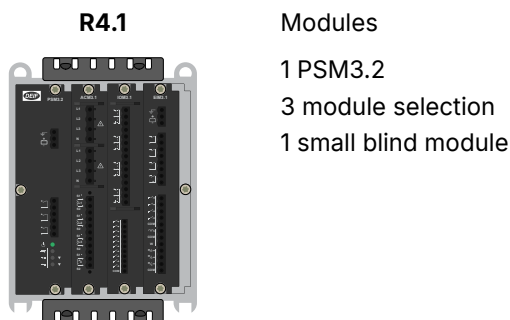


Modules
1 PSM3.1
2 module selection
1 PCM3.3

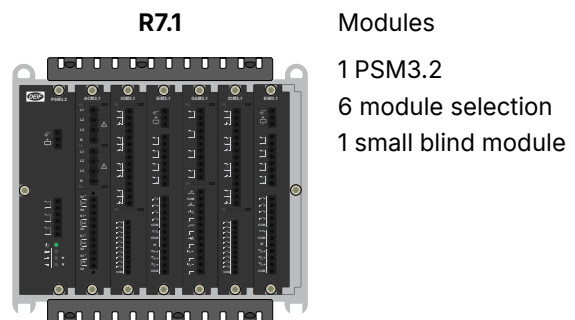


Modules
1 PSM3.1
5 module selection
1 PCM3.3

Extension racks (EtherCAT)



Modules
1 PSM3.2
3 module selection
1 small blind module



Modules
1 PSM3.2
6 module selection
1 small blind module

The hardware modules feature:

- Placement flexibility in the rack.
- Add, replace, or remove on-site.
- Automatically recognised.
- Configurable input and output functions (digital and analogue):
 - Digital input functions: Commands from operators or 3rd party equipment, changing configuration, operating information.
 - Digital output functions: Alarm status, commands to 3rd party equipment, operating information.
 - Analogue input functions: External set points, operating information, supervised binary inputs.
 - Analogue output functions: Regulation *, operating information.

NOTE * Only available on certain types of controller.

All slots must be covered during operation and blind modules can be used to cover unused slots.

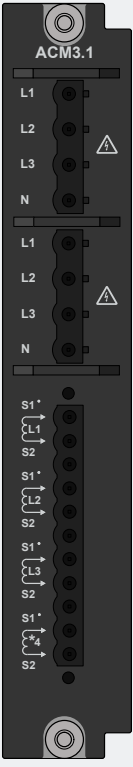
2. Technical specifications

2.1 Alternating current module ACM3.1

The alternating current module ACM3.1 measures the voltage and current on one side of a breaker, and the voltage on the other side. The hardware module responds when the measurements exceed the AC alarm parameters.

ACM3.1 provides robust frequency detection in environments with electrical noise. ACM3.1 allows extended measurement bandwidth up to 40 times the nominal frequency. ACM3.1 includes a configurable 4th current measurement.

ACM3.1 terminals

Module	Count	Symbol	Type	Name
	2 × (L1, L2, L3 and N)	L1/L2/L3/N	Voltage	3-phase voltage measurements
	1 × (L1, L2, L3 and 4th)	S1* S2	Current	3-phase current measurement
				4th current measurement

ACM3.1 technical specifications

Category	Specification
Voltage measurements	Nominal value: 100 to 690 V AC phase-to-phase Measurement range: 2 to 897 V AC phase-to-phase Accuracy: Class 0.2 Phase angle accuracy: 0.1° (within nominal voltage range and nominal frequency range) Altitude derating from 2,000 to 4,000 m (6,562 to 13,123 ft): 100 to 480 V AC phase-to-phase UL/cUL Listed: 100 to 600 V AC phase-to-phase Load on external voltage transformer: Maximum 0.2 VA/phase Voltage withstand: 1.2 × Nominal voltage continuously; 1.3 × Nominal voltage for 10 s
Current measurements	Nominal value: 1 or 5 A AC from current transformer Measurement range: 0.02 to 17.5 A AC from current transformer; Truncation level: 11 mA Accuracy: Class 0.2 Earth current: 18 dB attenuation of third harmonic of the nominal frequency UL/cUL Listed: From listed or R/C (XODW2.8) current transformers 1 or 5 A Load on external current transformer: Maximum 0.3 VA/phase Current withstand: 10 A continuously; 17.5 A for 60 s; 100 A for 10 s; 250 A for 1 s
Frequency measurements	Nominal value: 50 Hz or 60 Hz

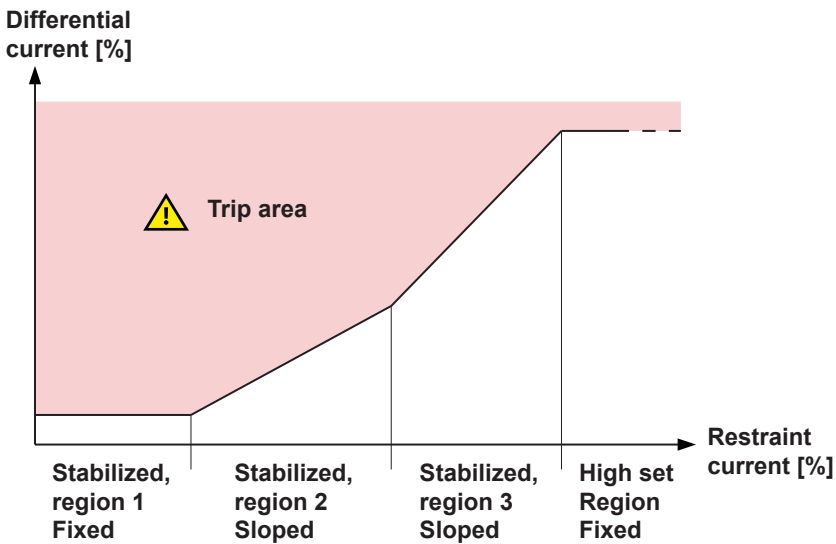
Category	Specification
	Measurement range: 35 to 78 Hz Accuracy: Class 0.1 of nominal value (35 to 78 Hz) (-40 to 70 °C) (-40 to 158 °F) Class 0.02 of nominal value (40 to 70 Hz) (15 to 30 °C) (59 to 86 °F)
Power measurements	Accuracy: Class 0.5
Accuracy and temperature	Unless otherwise specified for the above measurements: Nominal range: -40 to 70 °C (-40 to 158 °F) Reference range: 15 to 30 °C (59 to 86 °F) Accuracy: Measurement type specific within reference range Additional 0.2 % error of full scale per 10 °C (18 °F) outside reference range
Torques and terminals	Module faceplate screws: 0.5 N·m (4.4 lb-in) Secure the current measurement terminal block to the module faceplate: 0.25 N·m (2.2 lb-in) Connection of wiring to terminals: 0.5 N·m (4.4 lb-in) UL/cUL Listed: Wiring must be minimum 90 °C (194 °F) copper conductors only
Terminal connections	AC voltage and current terminals: Standard 45° plugs, 2.5 mm ² Wiring: 2.5 mm ² (13 AWG), multi-stranded
Galvanic isolation	Between AC voltage and other I/Os: 3310 V, 50 Hz for 60 s Between AC current and other I/Os: 2210 V, 50 Hz for 60 s
Ingress protection	Unmounted: No protection rating Mounted in rack: IP20 according to IEC/EN 60529
Dimensions	L×H×D: 28 × 162 × 150 mm (1.1 × 6.4 × 5.9 in)
Accessories (included)	<ul style="list-style-type: none"> • One roundel with 6 J-shaped voltage encoding pins (for the hardware module) • One roundel with 6 flat voltage encoding pins (for the voltage terminal blocks)
Weight	232 g (0.5 lb)

2.2 Differential current module ACM3.2

The differential current module ACM3.2 measures the generator outgoing 3-phase currents (consumer side) and star point 3-phase currents. The ACM3.2 uses the measurements to detect phase-to-phase faults or phase-to-earth faults (star point earthed generator stator only) in the generator stator, and dependent on the mounting of the CT's on the outgoing side, possibly also the cable between the generator and the main switchboard.

The protection consists of:

- A stabilised stage that uses an operating characteristic formed by a fixed and two sloped regions. This current restraint approach is also known as biased differential protection.
- A high set fixed differential stage (non-stabilised).



ACM3.2 terminals

Module	Count	Symbol	Type	Name
	1 × (L1, L2 and L3)		Current	3-phase current measurement - Consumer side
	1 × (L1, L2 and L3)		Current	3-phase current measurement - Neutral side

ACM3.2 technical specifications

Category	Specification
Nominal, reference and operating values	<p>Current: Nominal value: 1 or 5 A AC from current transformer</p> <p>Frequency:</p> <ul style="list-style-type: none"> Nominal value: 50 or 60 Hz Reference range: 40 to 70 Hz Operating range: 20 to 78 Hz <p>Temperature:</p> <ul style="list-style-type: none"> Reference range: 15 to 30 °C (59 to 86 °F) Operating range: -40 to 70 °C (-40 to 158 °F)
Current measurements	<p>Measurement range: 0.025 to 250 A AC. Truncation level: 20 mA</p> <p>Accuracy:</p> <ul style="list-style-type: none"> 0.025 to 20 A: ±1 % or ±10 mA of measured current (whichever is greater) 20 to 250 A: ±1.5 % of measured current <p>UL/cUL Listed: From listed or R/C (XODW2.8) current transformers 1 or 5 A</p> <p>Load on external current transformer: < 4 mΩ, including the terminal block</p> <p>Current withstand:</p> <ul style="list-style-type: none"> 20 A continuously 100 A for 10 s 400 A for 1 s 1250 A for 10 ms (half wave)
Frequency measurement	Accuracy (within operating range): > 0.1 A: ±0.1 % of actual frequency
Temperature	Current measurement accuracy temperature coefficient: ±0.25 %, or ±2.5 mA per 10 °C (18 °F) outside reference range (whichever is greater)
Torques and terminals	<p>Module faceplate screws: 0.5 N·m (4.4 lb-in)</p> <p>Secure the current measurement terminal block to the module faceplate: 0.25 N·m (2.2 lb-in)</p> <p>Connection of wiring to terminals:</p> <ul style="list-style-type: none"> ≤ 4 mm²: 0.5 N·m (4.4 lb-in) to 0.6 N·m (5.3 lb-in) > 4 mm²: 0.7 N·m (6.2 lb-in) to 0.8 N·m (7.1 lb-in) <p>UL/cUL Listed: Wiring must be minimum 90 °C (194 °F) copper conductors only</p>
Terminal connections	<p>AC current terminals: Standard 0° plugs, 6 mm² with securing screws</p> <p>Wiring: 2.5 to 6 mm² (13 to 10 AWG), multi-stranded</p>
Galvanic isolation	Between AC current and other I/Os: 2210 V, 50 Hz for 60 s
Ingress protection	<p>Unmounted: No protection rating</p> <p>Mounted in rack: IP20 according to IEC/EN 60529</p>
Dimensions	L×H×D: 28 × 162 mm × 152 mm (1.1 × 6.4 × 5.9 in)
Weight	230 g (0.5 lb) (including terminal blocks)
Accessories (included)	One roundel with 6 encoding pins (for the hardware module and terminal block)

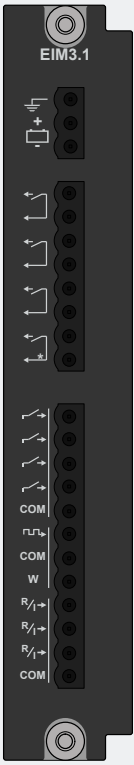







2.3 Engine interface module EIM3.1

The engine interface module has its own power supply and a tacho input to measure speed. It also has four relay outputs, four digital inputs, and three analogue inputs. These I/Os are configurable.

The power supply terminals include circuit protection against load dump transients and JEM177 surge transients (rugged design). These terminals also include battery voltage measurement.



EIM3.1 has its own microprocessor. If the rack power supply fails, or connection to the application is lost, the EIM3.1 can continue to operate independent of the application.








EIM3.1 terminals

Module	Count	Symbol	Type	Name
	1		Ground	Frame ground
	1		12 or 24 V DC	Power supply
	3		Relay output	Configurable
	1		Relay output (with wire break detection)	Configurable
	4		Digital input	Configurable
	1		MPU input (with wire break detection)*	Magnetic pickup
	1	w	W input (no wire break detection)*	Generator tacho output or NPN/PNP sensor
	3		Analogue current or resistance measurement input (RMI)	Configurable

NOTE * These inputs cannot both be used at the same time.

EIM3.1 technical specifications

Category	Specification
Frame ground 	Voltage withstand: ±36 V DC to the power supply positive (terminal 1) and negative (terminal 2)
Auxiliary power supply 	Input voltage: 12 or 24 V DC nominal (8 to 36 V DC continuously) UL/cUL Listed: 10 to 32.5 V DC 0 V DC for 50 ms when coming from at least 8 V DC (cranking dropout) Consumption: Typical 3 W, maximum 5 W Internal protection: by 12 A fuse (not replaceable) (fuse size determined by load dump requirements) Voltage withstand: ±36 V DC Load dump protected by TVS diodes Start current <ul style="list-style-type: none"> • Power supply current limiter <ul style="list-style-type: none"> ◦ 24 V: 0.6 A minimum

Category	Specification
	<ul style="list-style-type: none"> ◦ 12 V: 1.2 A minimum • Battery: No limit
Relay outputs 	Relay type: Electromechanical Electrical rating and UL/cUL Listed: 30 V DC and 6 A, resistive Voltage withstand: ±36 V DC
Relay output with wire break detection 	Relay type: Electromechanical Electrical rating and UL/cUL Listed: 30 V DC and 6 A, resistive Includes wire break detection Voltage withstand: ±36 V DC
Magnetic pickup 	Voltage: 3 to 70 V AC peak Frequency: 2 to 20,000 Hz Accuracy: 2 to 99 Hz: 0.5 Hz; 100 to 20,000 Hz: ±0.5 % of measurement Cable supervision: Resistance maximum 100 kΩ Includes wire break detection Voltage withstand: 70 V AC
Generator tacho (W) 	Voltage: 8 to 36 V DC Frequency: 2 to 20,000 Hz Accuracy: 2 to 99 Hz: 0.5 Hz; 100 to 20,000 Hz: ±0.5 % of measurement No wire break detection Voltage withstand: ±36 V DC
NPN/PNP 	Voltage: 8 to 36 V DC Frequency: 2 to 20,000 Hz Accuracy: 2 to 99 Hz: 0.5 Hz; 100 to 20,000 Hz: ±0.5 % of measurement No wire break detection Voltage withstand: ±36 V DC
Digital inputs 	Bipolar inputs <ul style="list-style-type: none"> • ON: -36 to -8 V DC, and 8 to 36 V DC • OFF: -2 to 2 V DC Minimum pulse length: 50 ms Impedance: 4.7 kΩ Voltage withstand: ±36 V DC
Analogue multi-functional inputs 	Current input <ul style="list-style-type: none"> • From active transmitter: 0 to 20 mA, 4 to 20 mA, or any custom range between 0 and 25 mA • Accuracy: 1 % of selected range Pt100/1000 <ul style="list-style-type: none"> • -40 to 250 °C (-40 to 482 °F) • Accuracy: 1 % of full scale (to IEC/EN60751) • Maximum sensor self-heating: 0.5 °C/mW (1 °F/mW) Resistance measurement <ul style="list-style-type: none"> • Any custom range between 0 and 2.5 kΩ • Accuracy: 1 % over ranges: 0 to 200 Ω, 0 to 300 Ω, 0 to 500 Ω, 0 to 1000 Ω, and 0 to 2500 Ω Digital input <ul style="list-style-type: none"> • Dry contact with cable supervision • Maximum circuit resistance: 330 Ω • Minimum current rating for the connected relay: 2.5 mA Voltage withstand: ±36 V DC All analogue multi-functional inputs for EIM3.1 have a common ground
Terminal connections	Frame ground and power supply

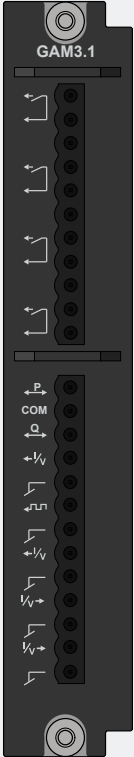






Category	Specification
	<ul style="list-style-type: none"> Terminals: Standard 45° plug, 2.5 mm² Wiring: 1.5 to 2.5 mm² (16 to 12 AWG), multi-stranded <p>Other connections</p> <ul style="list-style-type: none"> Terminals: Standard 45° plug, 2.5 mm² Wiring: 0.5 to 2.5 mm² (22 to 12 AWG), multi-stranded
Torques and terminals	Module faceplate screws: 0.5 N·m (4.4 lb-in) Connection of wiring to terminals: 0.5 N·m (4.4 lb-in) UL/cUL Listed: Wiring must be minimum 90 °C (194 °F) copper conductors only
Galvanic isolation	Between relay groups and other I/Os: 600 V, 50 Hz for 60 s Between digital input groups and other I/Os: 600 V, 50 Hz for 60 s Between MPU and W inputs and other I/Os: 600 V, 50 Hz for 60 s Between analogue inputs and other I/Os: 600 V, 50 Hz for 60 s
Ingress protection	Unmounted: No protection rating Mounted in rack: IP20 according to IEC/EN 60529
Dimensions	L×H×D: 28 × 162 × 150 mm (1.1 × 6.4 × 5.9 in)
Weight	250 g (0.5 lb)

2.4 Governor and AVR module GAM3.1





This governor and AVR module has four relay outputs, two analogue outputs and a pulse width modulation output, and two analogue inputs. These I/Os are configurable.

GAM3.1 also has terminals for analogue load sharing (future use).

GAM3.1 terminals

Module	Count	Symbol	Type	Name
	4		Relay output	Configurable
	1		Load sharing	Active power (P) (kW) load sharing (future use)
	1		Load sharing	Reactive power (Q) (kvar) sharing (future use)
	2		Analogue current or voltage output	GOV/AVR/configurable
	1		Pulse width modulation (PWM) output	PWM output (with PWM ground)
	2		Analogue current or voltage input	Configurable

GAM3.1 technical specifications

Category	Specification
Relay outputs 	Relay type: Electromechanical Electrical rating and UL/cUL Listed: 250 V AC or 30 V DC, and 6 A, resistive; B300, pilot duty (B300 is a power limit specification for inductive loads) Altitude derating from 2,000 to 4,000 m (6,562 to 13,123 ft): Maximum 150 V AC phase-to-phase Voltage withstand: 250 V AC
Load sharing (future use)  	Voltage input/output: -5 to 5 V DC Impedance: 23.5 k Ω Accuracy: 1 % of full scale, for both inputs and outputs Voltage withstand: ± 36 V DC
Analogue multi-functional outputs 	Current output <ul style="list-style-type: none"> -20 to 20 mA, or 0 to 20 mA, or 4 to 20 mA, or any custom range between -25 and 25 mA Accuracy: 1 % of the selected range (minimum range: 5 mA) 16-bit resolution over the range -25 to 25 mA Active output (internal supply) Maximum load: 400 Ω Voltage output (DC) <ul style="list-style-type: none"> -10 to 10 V, 0 to 10 V, 0 to 5 V, -5 to 5 V, 0 to 3 V, -3 to 3 V, or 0 to 1 V, or any custom range between -10 and 10 V

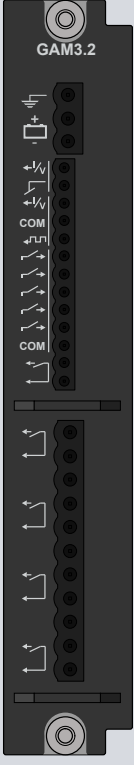







Category	Specification
	<ul style="list-style-type: none"> Accuracy: 1 % of the selected range (minimum range: 1 V) 16-bit resolution over the range -10 to 10 V Minimum load: 600 Ω. Voltage output internal resistance: < 1 Ω Voltage withstand: ±36 V DC Controller power off: Internal resistance > 10 MΩ
Pulse width modulation (PWM) output ↔	Frequency: 500 Hz ±50 Hz Resolution: 43,200 levels Voltage: <ul style="list-style-type: none"> Low level: < 0.5 V High level: > 5.5 V Maximum: 6.85 V Output impedance: 100 Ω Nominal temperature range: -40 to 70 °C (-40 to 158 °F) Reference temperature range: 15 to 30 °C (59 to 86 °F) Duty cycle accuracy (5 to 95 %): 0.25 % within reference temperature range 0.2 % of full scale additional error per 10 °C (18 °F) outside the reference range Example: At 70 °C (158 °F) the accuracy of the PWM output is 0.25 % + 4 × 0.2 % = 1.05 % Voltage withstand: ±30 V DC
Analogue multi-functional inputs I _V →	Current inputs <ul style="list-style-type: none"> From active transmitter: 0 to 20 mA, 4 to 20 mA, or any custom range between 0 and 24 mA Accuracy: 1 % of selected range Voltage inputs (DC) <ul style="list-style-type: none"> -10 to 10 V, 0 to 10 V, or any custom range between -10 and 10 V Accuracy: 1 % of selected range Voltage withstand: ±36 V DC
Terminal connections	Terminals: Standard 45° plug, 2.5 mm ² Wiring: 0.5 to 2.5 mm ² (22 to 12 AWG), multi-stranded
Torques and terminals	Module faceplate screws: 0.5 N·m (4.4 lb-in) Connection of wiring to terminals: 0.5 N·m (4.4 lb-in) UL/cUL Listed: Wiring must be minimum 90 °C (194 °F) copper conductors only
Galvanic isolation	Between individual relays and other I/Os: 2210 V, 50 Hz for 60 s Between load sharing and other I/Os: 600 V, 50 Hz for 60 s Between terminals 12 to 15 (analogue output 1, PWM output), and other I/Os: 600 V, 50 Hz for 60 s <ul style="list-style-type: none"> Analogue output 1 and the PWM output are galvanically connected Between terminals 16, 17 (analogue output 2) and other I/Os: 600 V, 50 Hz for 60 s Between terminals 18 to 21 (analogue inputs) and other I/Os: 600 V, 50 Hz for 60 s <ul style="list-style-type: none"> Analogue inputs 1 and 2 are galvanically connected
Ingress protection	Unmounted: No protection rating Mounted in rack: IP20 according to IEC/EN 60529
Dimensions	L×H×D: 28 × 162 × 150 mm (1.1 × 6.4 × 5.9 in)
Weight	224 g (0.5 lb)

2.5 Governor and AVR module GAM3.2



This governor and AVR module has its own power supply, two analogue outputs and a pulse width modulation output, five digital inputs, a status relay output, and four relay outputs. Apart from the status relay, all these I/Os are configurable.





GAM3.2 has its own microprocessor. If the rack power supply fails, GAM3.2 can continue to be used for manual operation if it has its own, independent power supply. The power supply terminals include circuit protection against load dump transients and JEM177 surge transients (rugged design). These terminals also include battery voltage measurement.

GAM3.2 terminals

Module	Count	Symbol	Type	Name
	1		Ground	Frame ground
	1		12 or 24 V	Power supply
	2		Analogue current or voltage output	GOV/AVR/configurable
	1		Pulse width modulation (PWM) output	PWM output
	5		Digital input	Configurable
	1		Relay output	GAM3.2 status
	4		Relay output	Configurable

GAM3.2 technical specifications

Category	Specification
Auxiliary power supply 	Input voltage: 12 or 24 V DC nominal (8 to 36 V DC continuously) UL/cUL Listed: 10 to 32.5 V DC 0 V DC for 50 ms when coming from at least 8 V DC (cranking dropout) Consumption: Typical 3 W, maximum 5 W Voltage measurement accuracy: ± 0.1 V (measurement range 8 to 36 V DC) Internally protection: 12 A fuse (not replaceable) (fuse size determined by load dump requirements) Voltage withstand: ± 36 V DC Load dump protected by TVS diodes Start current <ul style="list-style-type: none"> Power supply current limiter <ul style="list-style-type: none"> 24 V: 0.6 A minimum 12 V: 1.2 A minimum Battery: No limit
Analogue multi-functional outputs 	Current output <ul style="list-style-type: none"> Any custom range between -25 and 25 mA Accuracy: 1 % of the selected range (minimum range: 5 mA)

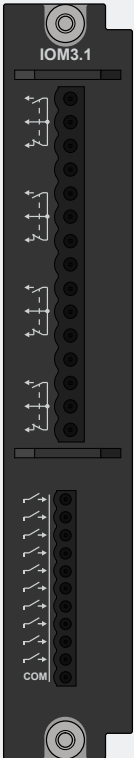


Category	Specification
	<ul style="list-style-type: none"> 16-bit resolution Active output (internal supply) Maximum load: 400 Ω Voltage output (DC) <ul style="list-style-type: none"> Any custom range between -10 and 10 V Accuracy: 1 % of the selected range (minimum range: 1 V) 16-bit resolution Minimum load: 600 Ω. Voltage output internal resistance: < 1 Ω. Voltage withstand: ±36 V DC Controller power off: Internal resistance > 10 MΩ
Pulse width modulation (PWM) output 	Frequency: 500 Hz ±50 Hz Resolution: 43,200 levels Voltage: <ul style="list-style-type: none"> Low level: < 0.5 V High level: > 5.5 V Maximum: 6.85 V Output impedance: 100 Ω Nominal temperature range: -40 to 70 °C (-40 to 158 °F) Reference temperature range: 15 to 30 °C (59 to 86 °F) Duty cycle accuracy (5 to 95 %): 0.25 % within reference temperature range 0.2 % of full scale additional error per 10 °C (18 °F) outside the reference range Example: At 70 °C (158 °F) the accuracy of the PWM output is 0.25 % + 4 × 0.2 % = 1.05 % Voltage withstand: ±30 V DC
Digital inputs 	Bipolar inputs <ul style="list-style-type: none"> ON: -36 to -8 V DC, and 8 to 36 V DC OFF: -2 to 2 V DC Minimum pulse length: 50 ms Impedance: 4.7 kΩ Voltage withstand: ±36 V DC
Relay output (GAM3.2 status) 	Relay type: Solid state Electrical rating and UL/cUL Listed: 30 V DC and 1 A, resistive Voltage withstand: ±36 V DC
Relay outputs 	Relay type: Electromechanical Electrical rating and UL/cUL Listed: 250 V AC or 30 V DC, and 6 A, resistive; B300, pilot duty (B300 is a power limit specification for inductive loads) Altitude derating from 2,000 to 4,000 m (6,562 to 13,123 ft): Maximum 150 V AC phase-to-phase Voltage withstand: 250 V AC
Terminal connections	Frame ground and power supply <ul style="list-style-type: none"> Terminals: Standard 45° plug, 2.5 mm² Wiring: 1.5 to 2.5 mm² (16 to 12 AWG), multi-stranded Analogue inputs, PWM, digital inputs and the status relay <ul style="list-style-type: none"> Terminals: Standard 45° plug, 1.5 mm² Wiring: 0.5 to 1.5 mm² (28 to 16 AWG), multi-stranded Relay outputs <ul style="list-style-type: none"> Terminals: Standard 45° plug, 2.5 mm² Wiring: 0.5 to 2.5 mm² (22 to 12 AWG), multi-stranded
Torques and terminals	Module faceplate screws: 0.5 N·m (4.4 lb-in) Connection of wiring to frame ground and power supply terminals: 0.5 N·m (4.4 lb-in) Connection of wiring to analogue inputs, PWM, digital inputs, and the status relay terminals: 0.25 N·m (2.2 lb-in)

Category	Specification
	Connection of wiring to relay output terminals: 0.5 N·m (4.4 lb-in) UL/cUL Listed: Wiring must be minimum 90 °C (194 °F) copper conductors only
Galvanic isolation	Between power supply and other I/Os: 600 V, 50 Hz for 60 s Between analogue inputs, PWM, digital inputs, and the status relay, and other I/Os: 600 V, 50 Hz for 60 s The analogue output on terminals 5 and 6 is galvanically connected to the PWM output (terminals 6 and 7) Between relay groups and other I/Os: 2210 V, 50 Hz for 60 s
Ingress protection	Unmounted: No protection rating Mounted in rack: IP20 according to IEC/EN 60529
Dimensions	L×H×D: 28 × 162 × 150 mm (1.1 × 6.4 × 5.9 in)
Weight	246 g (0.5 lb)



2.6 Input/output module IOM3.1

The input output module has 4 changeover relay outputs, and 10 digital inputs. These I/Os are all configurable.

IOM3.1 terminals

Module	Count	Symbol	Type	Name
	4		Relay output	Configurable
	10		Digital input	Configurable

IOM3.1 technical specifications

Category	Specification
Relay outputs 	Relay type: Electromechanical Electrical rating and UL/cUL Listed: 250 V AC or 30 V DC, and 6 A, resistive; B300, pilot duty (B300 is a power limit specification for inductive loads) Altitude derating from 3,000 to 4,000 m (9,842 to 13,123 ft): Maximum 150 V AC phase-to-phase Voltage withstand: 250 V AC
Digital inputs 	Bipolar inputs <ul style="list-style-type: none"> ON: -36 to -8 V DC, and 8 to 36 V DC OFF: -2 to 2 V DC Minimum pulse length: 50 ms Impedance: 4.7 kΩ Voltage withstand: ±36 V DC
Terminal connections	Relay outputs: Terminals: Standard 45° plug, 2.5 mm ² Wiring: 0.5 to 2.5 mm ² (22 to 12 AWG), multi-stranded Digital inputs: Terminals: Standard 45° plug, 1.5 mm ² Wiring: 0.1 to 1.5 mm ² (28 to 16 AWG), multi-stranded
Torques and terminals	Module faceplate screws: 0.5 N·m (4.4 lb-in) Connection of wiring to relay output terminals: 0.5 N·m (4.4 lb-in) Connection of wiring to digital input terminals: 0.25 N·m (2.2 lb-in) UL/cUL Listed: Wiring must be minimum 90 °C (194 °F) copper conductors only
Galvanic isolation	Between relay groups and other I/Os: 2210 V, 50 Hz for 60 s Between digital input groups and other I/Os: 600 V, 50 Hz for 60 s

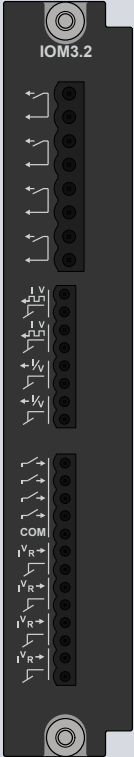





Category	Specification
Ingress protection	Unmounted: No protection rating Mounted in rack: IP20 according to IEC/EN 60529
Dimensions	L×H×D: 28 × 162 × 150 mm (1.1 × 6.4 × 5.9 in)
Weight	196 g (0.4 lb)

2.7 Input/output module IOM3.2



The input output module has 4 relay outputs, 4 analogue multifunctional outputs (including 2 pulse width modulation PWM outputs), 4 digital inputs, and 4 analogue multifunctional inputs. These I/Os are all configurable.




Internal cold junction compensation is not available on IOM3.2

IOM3.2 terminals

Module	Count	Symbol	Type	Name
	4		Relay output	Configurable
	2		Analogue multifunctional output (mA, V DC, PWM)	Configurable
	2		Analogue multifunctional output (mA, V DC)	Configurable
	4		Digital input	Configurable
	4		Analogue multifunctional input (mA, V DC, RMI)	Configurable

IOM3.2 technical specifications

Category	Specification
Relay outputs 	Relay type: Solidstate relay Electrical rating and UL/cUL Listed: 30 V DC, and 6 A, resistive; B300, pilot duty (B300 is a power limit specification for inductive loads) Voltage withstand: ± 36 V DC
Analogue multifunctional outputs 	Current output: <ul style="list-style-type: none"> Range: Any custom range between -25 to 25 mA DC Accuracy: 1 % of range Resolution: 16 bits (< 2 uA / bit) Type: Active output (internal supply) Load: Maximum ± 25 mA \rightarrow 400 Ω Voltage output: <ul style="list-style-type: none"> Range: Any custom range between -10 to 10 V DC Accuracy: 1 % of range Resolution: 16 bits ($< 0,7$ mV / bit) Load: Minimum ± 10V \rightarrow 600 Ω Internal resistance, power ON: < 1 Ω Internal resistance, power OFF: > 10 MΩ General information for all outputs:

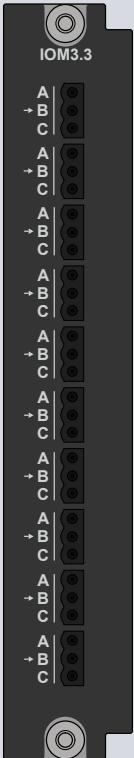
Category	Specification
	<ul style="list-style-type: none"> Refresh rate (max): 50ms (input to output) Voltage withstand: ± 36 V DC
Analogue multifunctional PWM outputs 	<p>PWM output:</p> <ul style="list-style-type: none"> Frequency range: 1 to 2500 Hz ± 5 Hz Duty cycle accuracy (5 to 95 %): 0.5 % within reference temperature range Resolution: 12 bits (4096 steps) Voltage: Low level: < 0.5 V. High level: > adjustable 1 to 10 V. Maximum: 10.2 V Output impedance: 25 Ω <p>General information for all outputs:</p> <ul style="list-style-type: none"> Refresh rate (max): 50 ms (input to output) Voltage withstand: ± 36 V DC
Digital inputs 	<p>Negative or positive trigger inputs:</p> <ul style="list-style-type: none"> ON: -36 to -8 V DC, and 8 to 36 V DC OFF: -2 to 2 V DC <p>Minimum pulse length: 50 ms Impedance: 3.9 kΩ Voltage withstand: ± 36 V DC</p>
Analogue multifunctional inputs 	<p>Digital inputs with wire break detection:</p> <ul style="list-style-type: none"> Dry contact inputs, 3 V DC internal supply Wire-break detection with maximum resistance for ON detection: 100 Ω to 400 Ω <p>Current inputs:</p> <ul style="list-style-type: none"> From active transmitter: 0 to 20 mA, or 4 to 20 mA Accuracy: ± 10 μA ± 0.25 % of actual reading <p>Voltage inputs (DC):</p> <ul style="list-style-type: none"> Range: ± 10 V DC / 0 to 10 V DC Accuracy: ± 10 mV ± 0.25 % of actual reading <p>Resistance measurement inputs, 2 wire (RMI):</p> <ul style="list-style-type: none"> Resistance measurement: 0 to 4.5 kΩ Accuracy: ± 1 Ω ± 0.25 % of actual reading <p>Resistance measurement inputs, 1 wire (RMI):</p> <ul style="list-style-type: none"> Resistance measurement: 0 to 4.5 kΩ Accuracy: ± 2 Ω ± 0.25 % of actual reading <p>Pt100:</p> <ul style="list-style-type: none"> Range: -200 to 850 $^{\circ}$C Accuracy: ± 1 $^{\circ}$C ± 0.25 % of actual reading <p>Pt1000:</p> <ul style="list-style-type: none"> Range: -200 to 850 $^{\circ}$C Accuracy: ± 0.5 $^{\circ}$C ± 0.25 % of actual reading <p>Thermocouple type, range and accuracy:</p> <ul style="list-style-type: none"> E: -200 to 1000 $^{\circ}$C (± 2 $^{\circ}$C ± 0.25 % of actual reading) J: -210 to 1200 $^{\circ}$C (± 2 $^{\circ}$C ± 0.25 % of actual reading) K: -200 to 1372 $^{\circ}$C (± 2 $^{\circ}$C ± 0.25 % of actual reading) N: -200 to 1300 $^{\circ}$C (± 2 $^{\circ}$C ± 0.25 % of actual reading) R: -50 to 1768 $^{\circ}$C (± 2 $^{\circ}$C ± 0.25 % of actual reading) S: -50 to 1768 $^{\circ}$C (± 2 $^{\circ}$C ± 0.25 % of actual reading) T: -200 to 400 $^{\circ}$C (± 2 $^{\circ}$C ± 0.25 % of actual reading) <p>Note: Twisted pair and shielded cable is recommended to achieve specification and optimisation of noise immunity.</p>

Category	Specification
	General information for all outputs: <ul style="list-style-type: none"> • Refresh rate (max): 50 ms (input to output) • Voltage withstand: ± 36 V DC • All analogue multi-functional inputs have a common ground
Terminal connections	Relay outputs: Terminals: Standard 45° plug, 2.5 mm ² Wiring: 0.5 to 2.5 mm ² (22 to 14 AWG), multi-stranded Other inputs: Terminals: Standard 45° plug, 1.5 mm ² Wiring: 0.1 to 1.5 mm ² (28 to 16 AWG), multi-stranded
Torques and terminals	Module faceplate screws: 0.5 N·m (4.4 lb-in) Connection of wiring to relay output terminals: 0.5 N·m (4.4 lb-in) Connection of wiring to digital input terminals: 0.25 N·m (2.2 lb-in) UL/cUL Listed: Wiring must be minimum 90 °C (194 °F) copper conductors only
Galvanic isolation	Between relay groups and other I/Os: 2210 V, 50 Hz for 60 s Between other input groups and other I/Os: 600 V, 50 Hz for 60 s
Ingress protection	Unmounted: No protection rating Mounted in rack: IP20 according to IEC/EN 60529
Dimensions	L×H×D: 28 × 162 × 150 mm (1.1 × 6.4 × 5.9 in)
Weight	188 g (0.4 lb)

2.8 Input/output module IOM3.3

The input output module has 10 analogue multifunctional inputs. These I/Os are all configurable.

IOM3.3 terminals

Module	Count	Symbol	Type	Name
	10	A → B C	Analogue multifunctional inputs (mA, V DC, RMI)	Configurable

IOM3.3 technical specifications

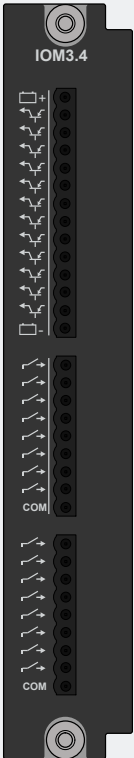


Category	Specification
Analogue multifunctional inputs A → B C	<p>Digital inputs with wire break detection:</p> <ul style="list-style-type: none"> Dry contact inputs, 3 V DC internal supply Wire-break detection with maximum resistance for ON detection: 100 Ω to 400 Ω <p>Current inputs:</p> <ul style="list-style-type: none"> From active transmitter: 0 to 20 mA, or 4 to 20 mA Accuracy: ±10 uA ±0.25 % of actual reading <p>Voltage inputs (DC):</p> <ul style="list-style-type: none"> Range: ±10 V DC / 0 to 10 V DC Accuracy: ±10 mA ±0.25 % of actual reading <p>Resistance measurement inputs, 2 or 3 wire (RMI):</p> <ul style="list-style-type: none"> Resistance measurement: 0 to 4.5 kΩ Accuracy: ±1 Ω ±0.25 % of actual reading <p>Resistance measurement inputs, 1 wire (RMI):</p> <ul style="list-style-type: none"> Resistance measurement: 0 to 4.5 kΩ Accuracy: ±2 Ω ±0.25 % of actual reading <p>Pt100:</p> <ul style="list-style-type: none"> Range: -200 to 850 °C Accuracy: ±1 °C ±0.25 % of actual reading <p>Pt1000:</p> <ul style="list-style-type: none"> Range: -200 to 850 °C

Category	Specification
	<ul style="list-style-type: none"> Accuracy: $\pm 0.5\text{ }^{\circ}\text{C} \pm 0.25\%$ of actual reading <p>Thermocouple type, range and accuracy:</p> <ul style="list-style-type: none"> E: -200 to 1000 $^{\circ}\text{C}$ ($\pm 2\text{ }^{\circ}\text{C} \pm 0.25\%$ of actual reading) J: -210 to 1200 $^{\circ}\text{C}$ ($\pm 2\text{ }^{\circ}\text{C} \pm 0.25\%$ of actual reading) K: -200 to 1372 $^{\circ}\text{C}$ ($\pm 2\text{ }^{\circ}\text{C} \pm 0.25\%$ of actual reading) N: -200 to 1300 $^{\circ}\text{C}$ ($\pm 2\text{ }^{\circ}\text{C} \pm 0.25\%$ of actual reading) R: -50 to 1768 $^{\circ}\text{C}$ ($\pm 2\text{ }^{\circ}\text{C} \pm 0.25\%$ of actual reading) S: -50 to 1768 $^{\circ}\text{C}$ ($\pm 2\text{ }^{\circ}\text{C} \pm 0.25\%$ of actual reading) T: -200 to 400 $^{\circ}\text{C}$ ($\pm 2\text{ }^{\circ}\text{C} \pm 0.25\%$ of actual reading) <p>Note: Twisted pair and shielded cable is recommended to achieve specification and optimisation of noise immunity.</p> <p>General information for all inputs:</p> <ul style="list-style-type: none"> Voltage withstand: $\pm 36\text{ V DC}$
Internal cold junction compensation (CJC)	<p>Internal temperature sensor:</p> <ul style="list-style-type: none"> Range: 0 to 70 $^{\circ}\text{C}$ <ul style="list-style-type: none"> Accuracy: $\pm 1.0\text{ }^{\circ}\text{C}$ Range: -40 to 0 $^{\circ}\text{C}$ <ul style="list-style-type: none"> Accuracy: $\pm 2.0\text{ }^{\circ}\text{C}$ <p>Mathematical compensation:</p> <ul style="list-style-type: none"> If non channels are configured as 4-20 mA <ul style="list-style-type: none"> Accuracy: $\pm 1.0\text{ }^{\circ}\text{C}$ If any channels are configured as 4-20 mA <ul style="list-style-type: none"> Accuracy: $\pm 1.5\text{ }^{\circ}\text{C}$ <p>If it is needed to have 4-20 mA channels on the same card, it is recommended to use the top channels for 4-20 mA and the lower channels for TC's</p> <p>Internal cold junction accuracy:</p> <ul style="list-style-type: none"> Heat dissipated by nearby heat sources can cause errors in thermocouple measurements by heating the IOM3.3 terminals to a different temperature than the cold-junction compensation sensor. Thermal gradient across the terminals can cause the terminals of different IOM3.3 channels to be at different temperatures, which creates accuracy errors and affects the relative accuracy between channels. The temperature measurement accuracy specifications include errors caused by the thermal gradient across the IOM3.3 terminals for configurations with the IOM3.3 terminals facing forward or upward.
Terminal connections	<p>Terminals: Standard 45$^{\circ}$ plug, 1.5 mm²</p> <p>Wiring: 0.1 to 1.5 mm² (28 to 16 AWG), multi-stranded</p>
Torques and terminals	<p>Module faceplate screws: 0.5 N·m (4.4 lb-in)</p> <p>Connection of wiring to relay output terminals: 0.5 N·m (4.4 lb-in)</p> <p>Connection of wiring to input terminals: 0.25 N·m (2.2 lb-in)</p> <p>UL/cUL Listed: Wiring must be minimum 90 $^{\circ}\text{C}$ (194 $^{\circ}\text{F}$) copper conductors only</p>
Galvanic isolation	<p>All 10 multi inputs have a common ground</p> <p>Galvanic isolation from rack: 600 V, 50 Hz for 60 s</p>
Dimensions	L×H×D: 28 × 162 × 150 mm (1.1 × 6.4 × 5.9 in)
Weight	164 g (0.4 lb)



2.9 Input/output module IOM3.4

The input output module has 12 digital outputs, and 16 digital inputs. These I/Os are all configurable.

IOM3.4 terminals

Module	Count	Symbol	Type	Name
	12		Digital output	Configurable
	16		Digital input	Configurable

IOM3.4 technical specifications

Category	Specification
Digital outputs 	Transistor type: PNP Supply voltage: 12 or 24 V DC nominal, maximum 36 V DC (relative to common) Maximum current (per output): < 55 °C: 250 mA; > 55 °C: 200 mA Leak current: Typical 1 µA, maximum 100 µA (temperature-dependent) Saturation voltage: Maximum 0.5 V Non-replaceable 4 A fuse Voltage withstand: ±36 V DC Load dump protected by TVS diodes Short circuit protection Reverse polarity protection Internal freewheeling diode
Digital inputs 	Bipolar inputs <ul style="list-style-type: none"> ON: -36 to -8 V DC, and 8 to 36 V DC OFF: -2 to 2 V DC Minimum pulse length: 50 ms Impedance: 4.7 kΩ Voltage withstand: ±36 V DC
Terminal connections	Terminals: Standard 45° plug, 1.5 mm ² Wiring: 0.1 to 1.5 mm ² (28 to 16 AWG), multi-stranded
Torques and terminals	Module faceplate screws: 0.5 N·m (4.4 lb-in) Connection of wiring to terminals: 0.25 N·m (2.2 lb-in) UL/cUL Listed: Wiring must be minimum 90 °C (194 °F) copper conductors only

Category	Specification
Galvanic isolation	Between groups: 600 V, 50 Hz for 60 s
Ingress protection	Unmounted: No protection rating Mounted in rack: IP20 according to IEC/EN 60529
Dimensions	L×H×D: 28 × 162 × 150 mm (1.1 × 6.4 × 5.9 in)
Weight	175 g (0.4 lb)

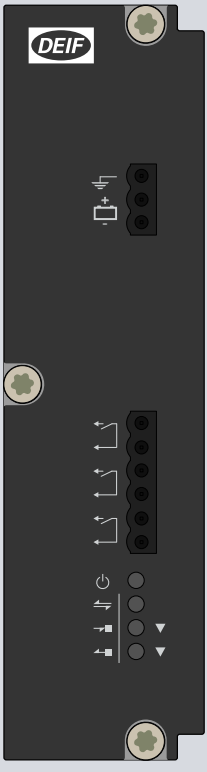







2.10 Power supply module PSM3.1 (Controller)

The power supply module provides power to all hardware modules in the rack. The rack status and alarms activate the three relay outputs. There are two ports for internal communication (EtherCAT) only with extension racks.



The PSM3.1 must to be powered by a power supply with Power Boost function.


The PSM3.1 manages the hardware module self-checks for the rack and includes a power LED. The power supply terminals include circuit protection against load dump transients and JEM177 surge transients (rugged design). These terminals also include battery voltage measurement.

PSM3.1 terminals

Module	Count	Symbol	Type/Info	Name
	1		Ground	Frame ground
	1		12 or 24 V	Power supply
	3		Relay output	1 × Status OK (fixed) 2 × configurable
	1		<ul style="list-style-type: none"> ● Off : No power supply ☀ Red flash : PSM is starting or module failure ● Green : Power supply ☀ Green flash : Controller identification 	Power supply indication
	1		<ul style="list-style-type: none"> ● Off : No EtherCAT communication ● Green : EtherCAT Communication 	EtherCAT communication connections (to connect to extension racks). LEDs are on the module front, connections are at the module bottom.
	1		EtherCAT communication (RJ45) input <ul style="list-style-type: none"> ● Off : No communication ● Green : Communication connected ☀ Green flash : Active communication 	
	1		EtherCAT communication (RJ45) output <ul style="list-style-type: none"> ● Off : No communication ● Green : Communication connected ☀ Green flash : Active communication 	

PSM3.1 technical specifications

Category	Specification
Frame ground 	Voltage withstand: ±36 V DC to the power supply positive (terminal 1) and negative (terminal 2)
Controller power supply 	Input voltage: 12 or 24 V DC nominal (8 to 36 V DC continuously) UL/cUL Listed: 10 to 32.5 V DC 0 V DC for 50 ms when coming from at least 8 V DC (cranking dropout) Consumption: Typical 20 W, maximum 35 W Voltage measurement accuracy: 0 to 30 V: ±1 V; 30 to 36 V: +1/-2 V Internal protection: 12 A fuse (not replaceable) (fuse size determined by load dump requirements) Voltage withstand: ±36 V DC Load dump protected by TVS diodes Start current <ul style="list-style-type: none"> • Power supply current limiter

Category	Specification
	<ul style="list-style-type: none"> ◦ 24 V: 4 A minimum ◦ 12 V: 8 A minimum • Battery: No limit
Relay outputs 	Relay type: Solid state Electrical rating and UL/cUL Listed: 30 V DC and 1 A, resistive Voltage withstand: ±36 V DC
Terminal connections	Frame ground and power supply: <ul style="list-style-type: none"> • Terminals: Standard 45° plug, 2.5 mm² • Wiring: 1.5 to 2.5 mm² (16 to 12 AWG), multi-stranded Other connections: <ul style="list-style-type: none"> • Terminals: Standard 45° plug, 2.5 mm² • Wiring: 0.5 to 2.5 mm² (22 to 12 AWG), multi-stranded
Communication connections	EtherCAT communication: RJ45. Use an Ethernet cable that meets or exceeds the SF/UTP CAT5e specifications
Torques and terminals	Module faceplate screws: 0.5 N·m (4.4 lb-in) Connection of wiring to terminals: 0.5 N·m (4.4 lb-in) UL/cUL Listed: Wiring must be minimum 90 °C (194 °F) copper conductors only
Galvanic isolation	Between power supply and other I/Os: 600 V, 50 Hz for 60 s Between relay groups and other I/Os: 600 V, 50 Hz for 60 s Between internal communication ports and other I/Os: 600 V, 50 Hz for 60 s
Ingress protection	Unmounted: No protection rating Mounted in rack: IP20 according to IEC/EN 60529
Dimensions	L×H×D: 43.3 × 162 × 150 mm (1.5 × 6.4 × 5.9 in)
Weight	331 g (0.7 lb)

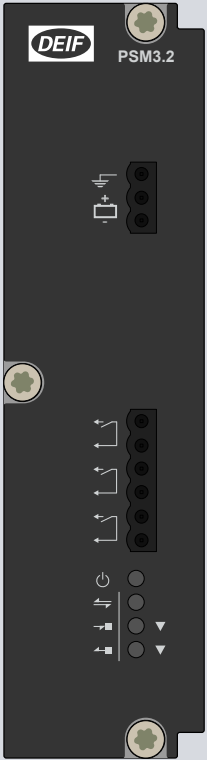







2.11 Power supply module PSM3.2 (Extension)

The power supply module provides power to all hardware modules in the extension rack. There are two ports for internal communication with the main controller. The internal communication (EtherCAT) connections are only used to communicate with the main controller. The rack status and alarms activate the three relay outputs.



The PSM3.2 must be powered by a power supply with Power Boost function.


The PSM3.2 manages the hardware module self-checks for the rack and includes a power LED. The power supply terminals include circuit protection against load dump transients and JEM177 surge transients (rugged design). These terminals also include battery voltage measurement.

PSM3.2 terminals

Module	Count	Symbol	Type/Info	Name
	1		Ground	Frame ground
	1		12 or 24 V	Power supply
	3		Relay output	1 × Status OK (fixed) 2 × configurable
	1		<ul style="list-style-type: none"> ● Off : No power supply ● Red flash : PSM is starting or module failure ● Green : Power supply ● Green flash : Rack identification 	Power supply indication
	1		<ul style="list-style-type: none"> ● Off : No EtherCAT communication ● Green : EtherCAT Communication 	EtherCAT communication connections (to connect to the racks). LEDs are on the module front, connections are at the module bottom.
	1		EtherCAT communication (RJ45) input <ul style="list-style-type: none"> ● Off : No communication ● Green : Communication connected ● Green flash : Active communication 	
	1		EtherCAT communication (RJ45) output <ul style="list-style-type: none"> ● Off : No communication ● Green : Communication connected ● Green flash : Active communication 	


PSM3.2 technical specifications

Category	Specification
Frame ground 	Voltage withstand: ±36 V DC to the power supply positive (terminal 1) and negative (terminal 2)
Controller power supply 	Input voltage: 12 or 24 V DC nominal (8 to 36 V DC continuously) UL/cUL Listed: 10 to 32.5 V DC 0 V DC for 50 ms when coming from at least 8 V DC (cranking dropout) Consumption: Typical 20 W, maximum 35 W Voltage measurement accuracy: 0 to 30 V: ±1 V; 30 to 36 V: +1/-2 V Internal protection: 12 A fuse (not replaceable) (fuse size determined by load dump requirements) Voltage withstand: ±36 V DC Load dump protected by TVS diodes Start current <ul style="list-style-type: none"> • Power supply current limiter

Category	Specification
	<ul style="list-style-type: none"> ◦ 24 V: 4 A minimum ◦ 12 V: 8 A minimum • Battery: No limit
Relay outputs 	Relay type: Solid state Electrical rating and UL/cUL Listed: 30 V DC and 1 A, resistive Voltage withstand: ±36 V DC
Terminal connections	Frame ground and power supply: <ul style="list-style-type: none"> • Terminals: Standard 45° plug, 2.5 mm² • Wiring: 1.5 to 2.5 mm² (16 to 12 AWG), multi-stranded Other connections: <ul style="list-style-type: none"> • Terminals: Standard 45° plug, 2.5 mm² • Wiring: 0.5 to 2.5 mm² (22 to 12 AWG), multi-stranded
Communication connections	EtherCAT communication: RJ45. Use an Ethernet cable that meets or exceeds the SF/UTP CAT5e specifications
Torques and terminals	Module faceplate screws: 0.5 N·m (4.4 lb-in) Connection of wiring to terminals: 0.5 N·m (4.4 lb-in) UL/cUL Listed: Wiring must be minimum 90 °C (194 °F) copper conductors only
Galvanic isolation	Between power supply and other I/Os: 600 V, 50 Hz for 60 s Between relay groups and other I/Os: 600 V, 50 Hz for 60 s Between internal communication ports and other I/Os: 600 V, 50 Hz for 60 s
Ingress protection	Unmounted: No protection rating Mounted in rack: IP20 according to IEC/EN 60529
Dimensions	L×H×D: 43.3 × 162 × 150 mm (1.5 × 6.4 × 5.9 in)
Weight	331 g (0.7 lb)

2.12 Processor and communication module PCM3.3

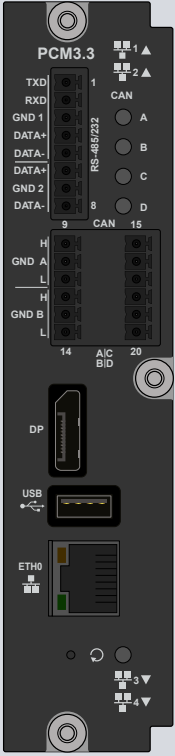

The PCM3.3 module offers a powerful quad core 1.6 GHz 64 bit CPU, well suited for high-end C/C++ * and CODESYS applications, data logging for power management or power control applications. The module provides a 100 Mbps Ethernet network interface (prepared for TSN) for real-time power plant management network and 4 managed switched 10/100 Mbps network interfaces for local network. CAN/CANopen connectivity are provided as on-module interfaces. The DisplayPort connector allows connection of standard LED/LCD monitors for graphical visualization (up to 1080p).

PCM3.3 has 4 x CAN ports and 1 x RS-232/485 port and 1 x RS-485 port for serial bus connectivity. It has a *Self-check OK*  LED.

By default the module is provided with screw terminals.

NOTE * Contact DEIF for availability.

PCM3.3 terminals

Module	Count	Symbol	LED	Type	Name
	5	ETH0 1 to 4	<ul style="list-style-type: none"> Off : No communication Green : Communication connected Green flash : Active communication 	Ethernet (RJ45)	Two connections at the top of the hardware module, one on the front, and two at the bottom.
	1		<ul style="list-style-type: none"> Off : Self-check not OK Green : Self-check OK 		
	1	USB		USB host (Type-A)	
	1	DP		DisplayPort (DP full size)	
	4	H, GND A to D, L	<ul style="list-style-type: none"> Off : No communication Green : CAN connected 	CAN port	CAN bus
	1	COM 1		RS-232/485 port	
	1	COM 2		RS-485 port	

PCM3.3 technical specifications

Power supply and backplane	
Power supply	From backplane via PSM3.x module.
Backplane interfaces	1x EtherCAT OUT (Port 1) - LVDS. 1x EtherCAT OUT (Port 2) - LVDS.
Interfaces	
Ethernet	1 x Ethernet (ETH 0) (prepared for TSN support) : 100/100BASE-T, 8P8C (RJ45), shielded Cat5e, >0.76 µm gold plating. 4 x Ethernet, Managed Switch (ETH 1 to 4) : 10/100BASE-T, 8P8C (RJ45), shielded Cat5e, >0.76 µm gold plating.
CAN	4 x CAN (CAN 1 to 4) : ISO 11898, shielded twisted copper cable, 50 to 1,000 kbit/s, selectable termination resistors.
UART	COM 1 and COM 2: 2(1) x RS-485 (COM 1, COM 2) : TIA/EIA-485 shielded twisted copper cable 4.8 to 921.6 kbit/s (half duplex) COM 1 only: 1 x RS-232 (COM 1) : TIA/EIA-232E shielded copper cable 4.8 to 115.2 kbit/s (full duplex)
DisplayPort	1 x DisplayPort(DP) 1.3 1080p (Full-size connector). External third-party non-DEIF displays should be configured to Input mode instead of Automatic detection.
USB Host	1x USB 3.0 (Type-A connector), Mass Storage Class. Power delivery up to 4.5 W.
LED	See terminals.
Pin-hole switch	Factory Reset Provisioning of module (Software configurable). **

CPU	
Processor	1.6 GHz Quad-core industrial grade ARMv8 64 bit CPU with ECC protected cache.
Memory	2 GB LPDDR4.
Internal storage	32 GB 3D TLC NAND flash running in pseudo SLC mode. 7 GB available for user application data.
Persistent storage	128 kB user available from CODESYS (256 kB FRAM installed).
Real-Time Clock (RTC) battery	Real time clock with replaceable coin-cell battery. CR2430 3V battery, rated for operation at -40 to 85°C (-40 to 185 °F). This is not a standard CR2430 battery. The CR2430 battery is an available accessory. Contact DEIF for ordering.
Cooling	Passive.
Other features	CPU junction temperature measurement. Software reset on high CPU temperature.

Other	
Dimensions	L×H×D: 36.8 × 162 × 142 mm (1.44 × 6.37 × 5.59 in)
Weight	~ 226 g (0.49 lb)
Power consumption	~ 16 W, hereof 5.6 W reserved for USB3.0 host
Torques and terminals	Module faceplate screws: 0.5 N·m (4.4 lb-in). Connection of wiring to terminals: 0.5 N·m (4.4 lb-in). UL/ULC Listed: Wiring must be minimum 90 °C (194 °F) copper conductors only.
Ingress protection	Unmounted: No protection rating Mounted in rack: IP20 according to IEC/EN 60529

Software	
Operating system	DEIF In-house maintained operating system (BSPv5). Real-time patched Linux®. GNU/Linux customized with PREEMPT realtime patch and system drivers. C/C++ * and CODESYS applications are running in userspace mode. Fail-safe system software start up with two OS images (active and fault-back) Power fail-safe, self-monitoring and error correcting file system. Secure boot (Chain-of-trust).
Cybersecurity	Conforming to IACS UR E27 Connections to untrusted networks may require additional equipment or security counter-measures not included in the product.
System configuration	On-device web-based configuration. System information. Simplified update procedures (no special tools, same for OS and firmware). User access management (Multiuser access), rights and credentials. Network configuration of the build-in 4 port managed switch (VLAN). IPv4 and IPv6 support (static/dynamic). Network Time protocol support as Client. Discover the device via hostname (mDNS services). Device configuration backup and restore.
System network protocols	Network Time Protocol (NTP), server and client. Dynamic Host Configuration Protocol (DHCP), client. IGH Master (Native for C/C++ applications * / System network scan). **

Programming (iE 350 PLC)

PLC run-time	CODESYS V3 runtime: CODESYS V3.5 SP 18. iE 350 LAND / MARINE (CODESYS Single Core support), iE 350 PLC (CODESYS Multi Core support).
Programming languages	IEC61131-3: LD, SFC, FBD, ST (CODESYS V3.5 SP18+ IDE). ANSI C/C++: * ANSI C/C++ via Linux SDK. *
Visualisation	CODESYS webvisualisation (Option). WEB-Visu rendering for DisplayPort.
Application protocols	Ethernet: OPC UA Server, OPC UA Client via Single License (CODESYS Store) Modbus TCP Server (CODESYS) Modbus TCP Client (CODESYS) PROFINET V2.3 Class A RT CONTROLLER (CODESYS) PROFINET V2.3 Class A RT DEVICE (CODESYS) HTTPS/WSS/JSON (CVI DEIF component) *** OPC UA Server (Open62541 - DEIF component) Modbus TCP Server (libModbus - DEIF Component) Modbus TCP Client (libModbus - DEIF component) Fieldbuses: EtherCAT master(CODESYS) CANOpen Client (CODESYS) CANOpen Server (CODESYS) CAN Layer II (via CODESYS library) J1939 (CODESYS) Modbus RTU Client (CODESYS) Modbus RTU Server (CODESYS) Modbus RTU Client (libModbus - DEIF component) **

NOTE * Contact DEIF for availability.

** For future use.

*** Deprecated support.

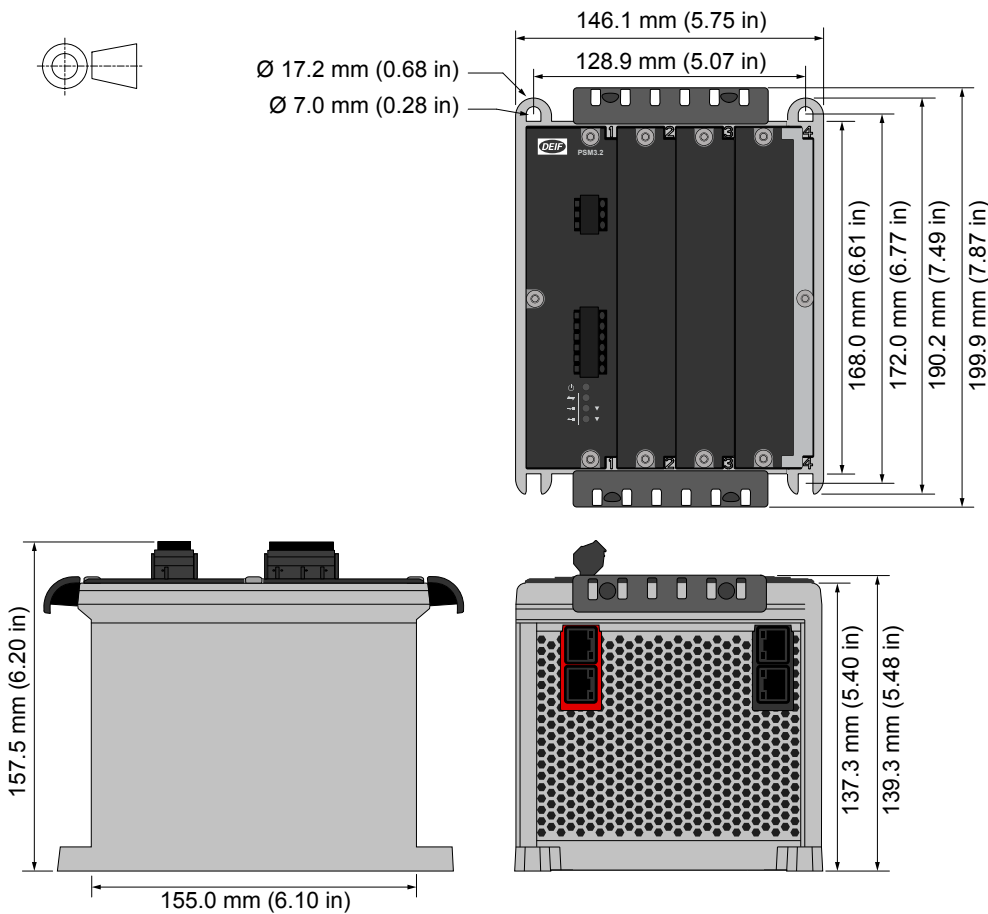
2.13 Rack R4.1

Rack R4.1 technical specifications

Category	Specification
Ingress protection	IP20 (all slots must have modules or blind modules mounted) according to IEC/EN 60529
UL/cUL Listed	Type Complete Device, Open Type 1
Material	Rack frame: Aluminium
Mounting	Base mount, using four M6 bolts with self-locking washers (or self-locking screws). The bolts and self-locking washers (or self-locking screws) are not included with the rack. UL/cUL Listed: For use on a flat surface of a type 1 enclosure UL/cUL Listed: To be installed in accordance with the NEC (US) or the CEC (Canada)
Tightening torque	Mounting bolts: 4 N·m (35 lb-in)

Rack 4.1 dimension and weight specifications

Category	Specification
Dimensions	L 146.1 mm x H 199.9 mm x D 157.5 mm (5.75 in x 7.87 in x 6.20 in) (outer frame, includes cable strain relief plates)
Weight	Without any hardware modules: 994 g (2.2 lb)



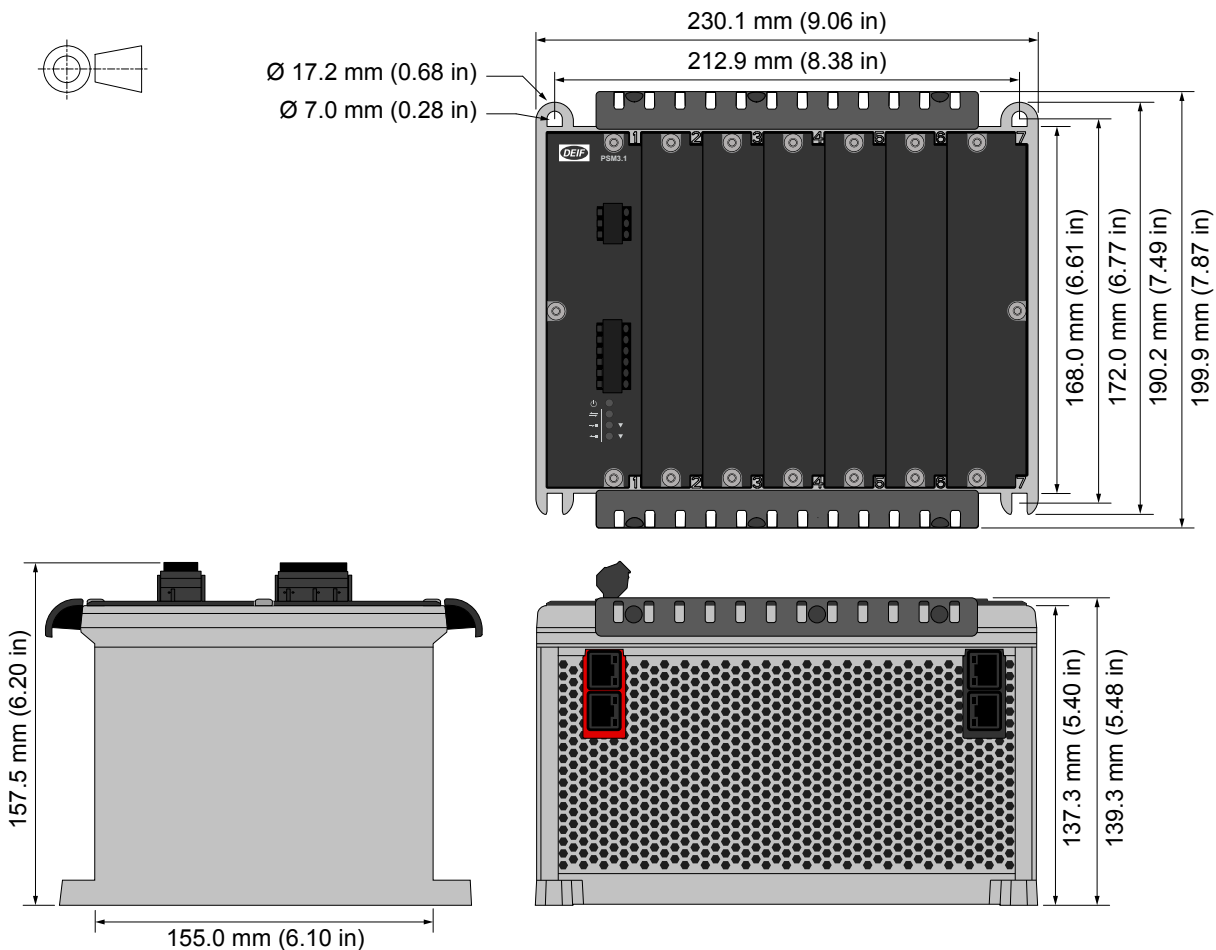
2.14 Rack R7.1

Rack 7.1 technical specifications

Category	Specification
Ingress protection	IP20 (all slots must have modules or blind modules mounted) according to IEC/EN 60529
UL/cUL Listed	Type Complete Device, Open Type 1
Material	Rack frame: Aluminium
Mounting	Base mount, using four M6 bolts with self-locking washers (or self-locking screws).
	The bolts and self-locking washers (or self-locking screws) are not included with the rack.
	UL/cUL Listed: For use on a flat surface of a type 1 enclosure UL/cUL Listed: To be installed in accordance with the NEC (US) or the CEC (Canada)
Tightening torque	Mounting bolts: 4 N·m (35 lb-in)

Rack 7.1 dimensions and weight specifications

Category	Specification
Dimensions	L 230.1 mm x H 199.9 mm x D 157.5 mm (9.06 in x 7.87 in x 6.20 in) (outer frame, includes cable strain relief plates)
Weight	Without any hardware modules: 1330 g (2.9 lb)



2.15 Blind module

A blind module must be used to close off each empty slot in the rack.

Blind module technical specifications

Category	Specification
Tightening torque	Module faceplate screws: 0.5 N·m (4.4 lb-in)
Dimensions	L×H×D: 28 × 162 × 18 mm (1.1 × 6.4 × 0.7 in)
Weight	44 g (0.1 lb)

2.16 Small blind module

A small blind module is required for extension racks.

Small blind module technical specifications

Category	Specification
Tightening torque	Module faceplate screws: 0.5 N·m (4.4 lb-in)
Size	L×H×D: 14 × 162 × 18 mm (0.5 × 6.4 × 0.7 in)
Weight	12 g (0.03 lb)

3. Legal information

3.1 Disclaimer and copyright

Open source software

This product contains open source software licensed under, for example, the GNU General Public License (GNU GPL) and GNU Lesser General Public License (GNU LGPL). The source code for this software can be obtained by contacting DEIF at support@deif.com. DEIF reserves the right to charge for the cost of the service.

General warranty

The warranty period for the purchased product is defined in the contract and order acknowledgement. In general, DEIF's Terms and Conditions of Sale and Delivery apply.

The product continuously monitors the operating temperature and stores this information in a log file on the device. DEIF uses this information for service purpose and to validate if issues with the product are covered by the warranty.

The software packages supplied are believed to be of the highest quality. Due to the nature of the software development process, it is possible that there are hidden defects in the software which may affect its use, or the operation of any software or device developed with this software package.

DEIF does not undertake responsibility for determining whether this package is suitable for the application, nor for ensuring the correct operation of the application software and hardware.

The warranty does not cover product wear parts, such as:

- Internal flash disc
- If applicable, SD card (purchased separately)
- Replaceable coil-cell battery, used for the real-time clock (available as a spare part)

Trademarks

DEIF and the DEIF logo are trademarks of DEIF A/S.

Bonjour[®] is a registered trademark of Apple Inc. in the United States and other countries.

Adobe[®], *Acrobat*[®], and *Reader*[®] are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States and/or other countries.

CANopen[®] is a registered community trademark of CAN in Automation e.V. (CiA).

SAE J1939[®] is a registered trademark of SAE International[®].

CODESYS[®] is a trademark of CODESYS GmbH.

EtherCAT[®], *EtherCAT P*[®], *Safety over EtherCAT*[®], are trademarks or registered trademarks, licensed by Beckhoff Automation GmbH, Germany.

VESA[®] and *DisplayPort*[®] are registered trademarks of Video Electronics Standards Association (VESA[®]) in the United States and other countries.

Google[®] and *Google Chrome*[®] are registered trademarks of Google LLC.

Linux[®] is a registered trademark of Linus Torvalds in the U.S. and other countries.

Modbus[®] is a registered trademark of Schneider Automation Inc.

Torx[®], *Torx Plus*[®] are trademarks or registered trademarks of Acument Intellectual Properties, LLC in the United States or other countries.

Windows[®] is a registered trademark of Microsoft Corporation in the United States and other countries.

All trademarks are the properties of their respective owners.

Copyright

© Copyright DEIF A/S. All rights reserved.

Disclaimer

DEIF A/S reserves the right to change any of the contents of this document without prior notice.

The English version of this document always contains the most recent and up-to-date information about the product. DEIF does not take responsibility for the accuracy of translations, and translations might not be updated at the same time as the English document. If there is a discrepancy, the English version prevails.