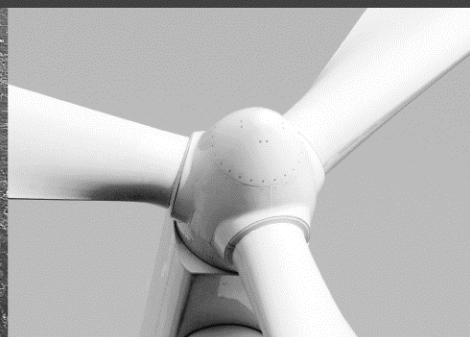




-power in control

DATA SHEET



Bells, Type 117, 118R, 124

- Types 118R and 124 waterproof
- For voltages: 12...24...220V AC/DC
- Sound pressures:
90 dB...93 dB...96 dB...100 dB



DEIF A/S · Frisenborgvej 33 · DK-7800 Skive
Tel.: +45 9614 9614 · Fax: +45 9614 9615
info@deif.com · www.deif.com

Document no.: 4921200005E

Description

Type 117 White bakelite bell with dome of bright nickel plated steel, ø100 mm.

Type 118R Waterproof, grey bakelite bell with dome of grey enamelled steel, ø100 mm.

Type 124 Waterproof, black bell made out of corrosion-protected light metal alloy with brass dome, ø200 mm.

Technical specifications

	Type	Voltage		Coil resistance	Consumption	Sound pressure	EAN. no.
		=/DC	-/AC	(Ohms)	(Amps)	1m dB)	
Bell	117.24	24		1 x 200	0.1	90	5703727000043
Bell (waterproof)	118R12	12	24	2 x 20	0.2	93	5703727000135
	118R24	24		2 x 80	0.08	96	5703727000142
	118R220		220	1 x 2000	0.03	96	5703727000166
Bell (waterproof)	124.12	12		2 x 9	0.4	100	5703727000210
	124.24	24		2 x 37	0.3	100	5703727000227
	124.220	220	220	2 x 1200	0.05	100	5703727000258

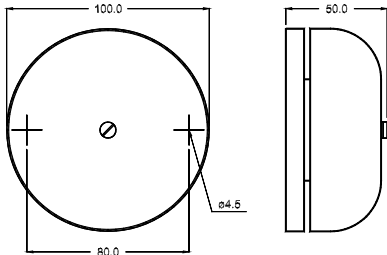
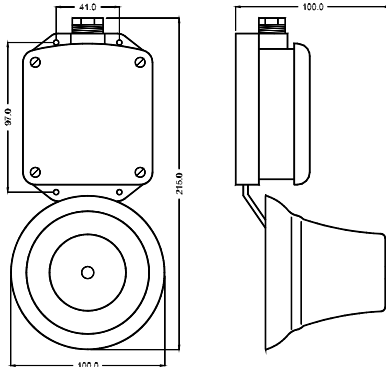
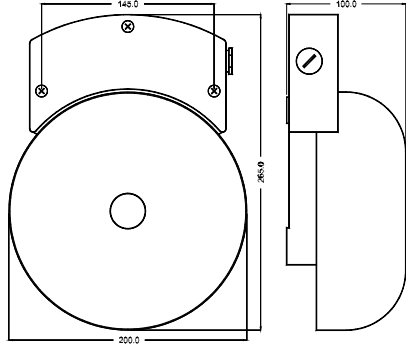
Temperature: -10...55°C (nominal), -25...60°C (operation), -40...70°C (storage).

Protection: Type 117: IP20, to EN 60529 and IEC 529.

Types 118R, 124: IP54, to EN 60529 and IEC 529.

EMC: To EN 50081-1/2 and EN 50082-1/2. CE-marked for residential, commercial and light industry plus industrial environment.

Dimensions

All dimensions in mm		All dimensions in mm		All dimensions in mm	
					
Type 117	Weight: approx. 0.4 kg	Type 118R	Weight: approx. 0.5 kg	Type 124	Weight: approx. 4.6 kg

Available variants

Item no.	Variant no.	Variant description
2998910110	01	117 all voltages
2998910110	02	118R all voltages
2998910110	03	124 all voltages

Order specifications

Variants:

Mandatory information					Additional options to the standard variant
Item no.	Type	Variant no.	Voltage	EAN no. (if available)	Option

Example:

Mandatory information					Additional options to the standard variant
Item no.	Type	Variant no.	Voltage	EAN no. (if available)	Option
2998910110-01	117	01	220 V	5703727000166	No options available



DEIF A/S, Frisenborgvej 33
DK-7800 Skive, Denmark

Tel.: +45 9614 9614, Fax: +45 9614 9615
E-mail: deif@deif.com, URL: www.deif.com



Due to our continuous development we reserve the right to supply equipment which may vary from the described.

